


## Cell Type KR-1400AE Specifications


Nominal Capacity		1400mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	140mA	
	Fast	2100mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		10.0mΩ (at 1000Hz)	
Weight		31g/1.09oz	
Dimensions(D)×(H) (with tube)		17.0 <sup>0</sup> <sub>-0.5</sub> × 49.5 <sup>0</sup> <sub>-1.2</sub> mm	
		0.67 <sup>0</sup> <sub>-0.02</sub> × 1.95 <sup>0</sup> <sub>-0.05</sub> inch	

### Typical Characteristics


#### Charge

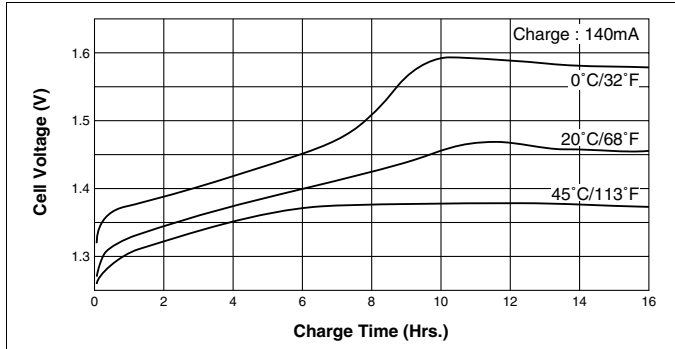


#### Discharge (at high rate)

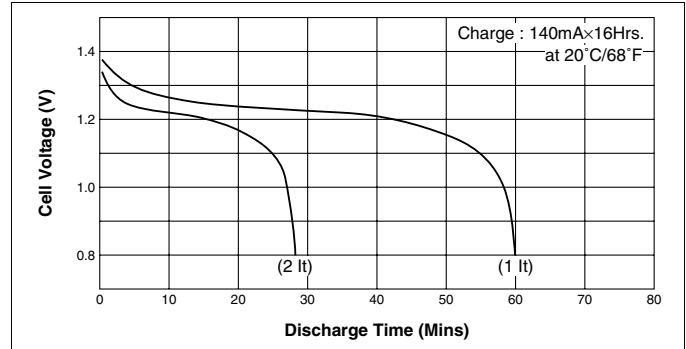


#### Charge

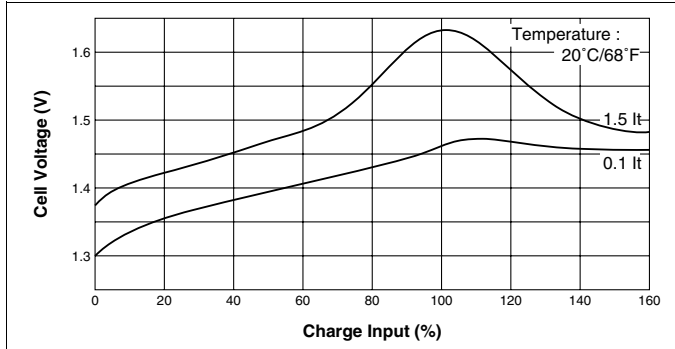


#### Discharge (at high rate)

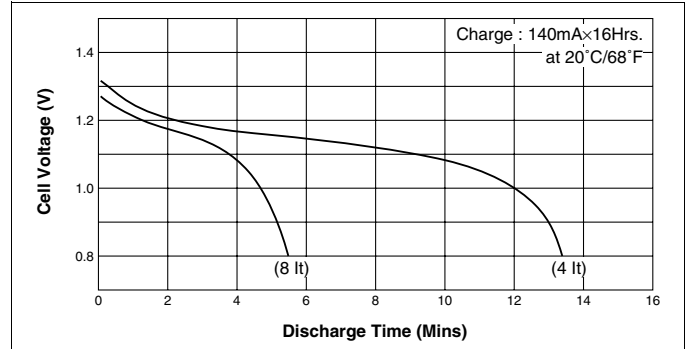

#### Discharge (at low rate)

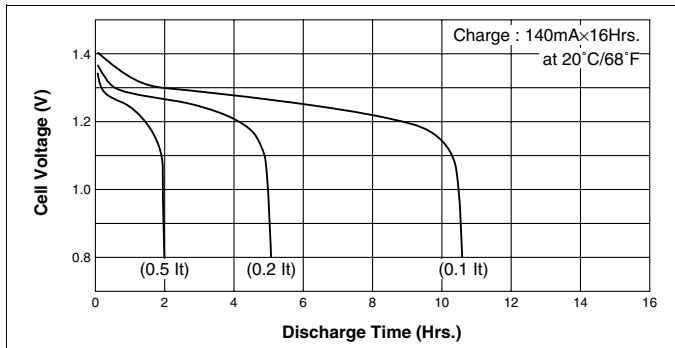

#### Temperature (Charge & Discharge)

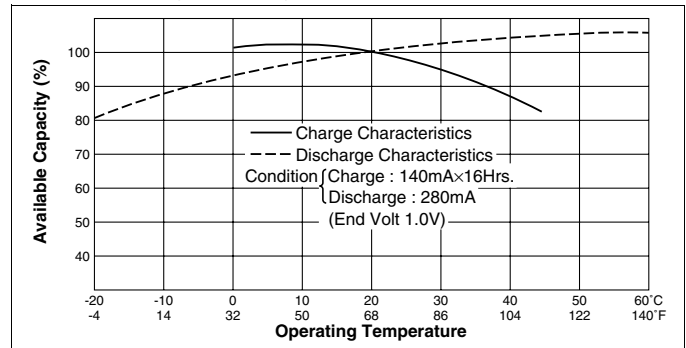

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>