


Dimensions of Bare Cell	H	58.4 ±0.4	mm
		2.299 ±0.016	inch
D	32.3 ±0.3	mm	
	1.272 ±0.012	inch	
d	10.0	mm	
	0.394	inch	

Cell Type KR-5000DEL Specifications


Nominal Capacity		5000mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	500mA	
	Fast	7500mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
Storage		-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		3.5mΩ (at 1000Hz)	
Weight		150g/5.28oz	
Dimensions(D)×(H) (with tube)		33.2 ⁰ _{-0.9} × 59.5 ⁰ _{-1.5} mm	
		1.31 ⁰ _{-0.04} × 2.34 ⁰ _{-0.06} inch	

Typical Characteristics


Charge

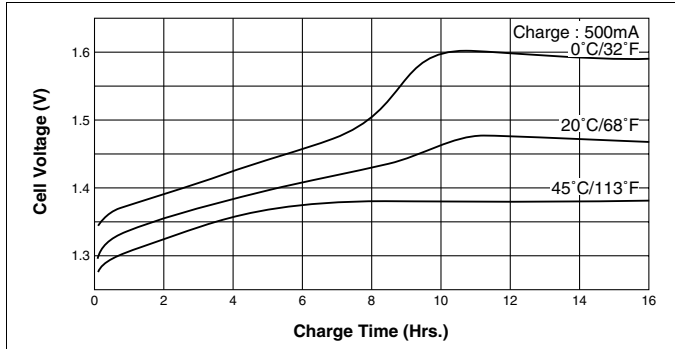


Discharge (at high rate)

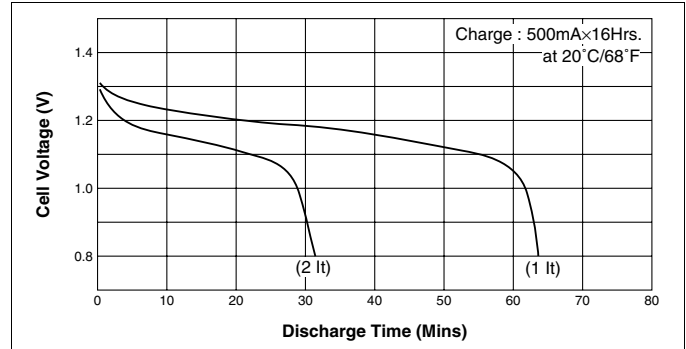


Charge

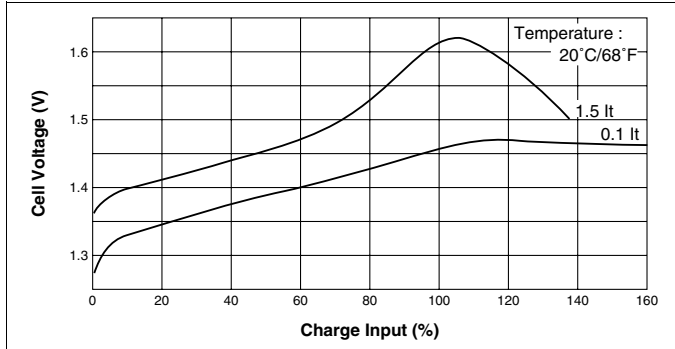


Discharge (at high rate)

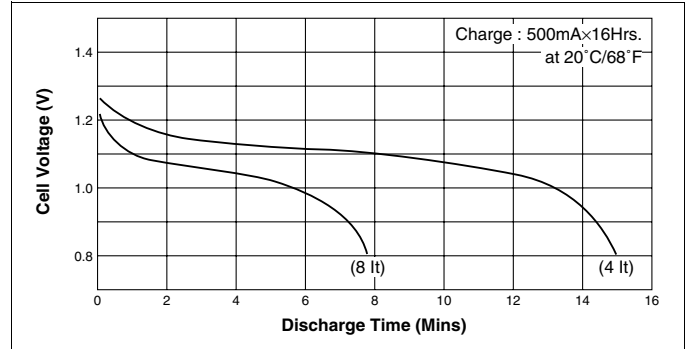

Discharge (at low rate)

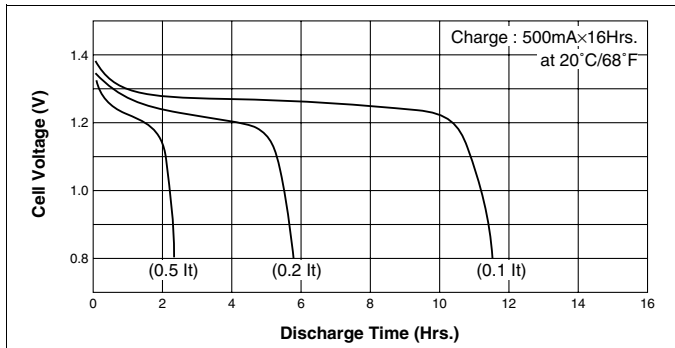

Temperature (Charge & Discharge)

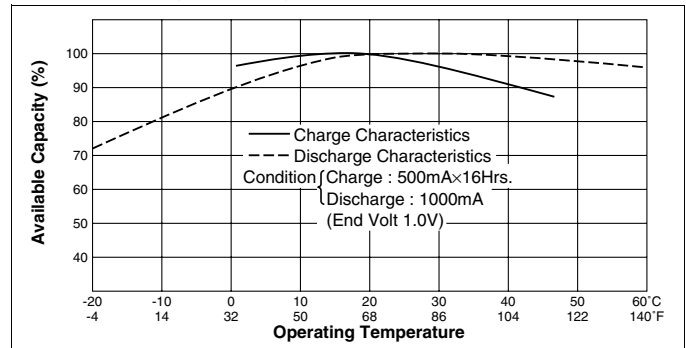

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>