


SANYO

Cadnica

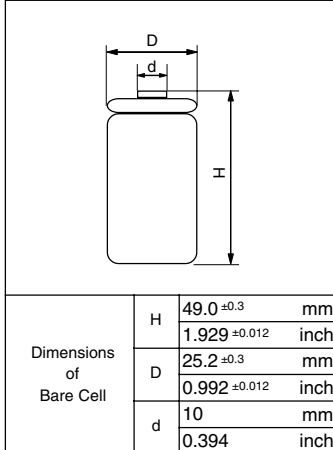


Cell Type KR-CH(3.0) Specifications


Nominal Capacity		3000mAh
Nominal Voltage		1.2V
Charging Current	Trickle	100mA
	Standard	300mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]
	Discharge	-20°C to +70°C [-4°F to 158°F]
	Storage	-30°C to +70°C [-22°F to 158°F]
Internal Impedance (Av.) (at 50% discharge)		5.9mΩ (at 1000Hz)
Weight		78g/2.75oz
Dimensions(D)×(H) (with tube)		26.0 ⁰ _{-0.8} × 50.0 ⁰ _{-1.2} mm 1.02 ⁰ _{-0.03} × 1.97 ⁰ _{-0.05} inch

Typical Characteristics


Charge

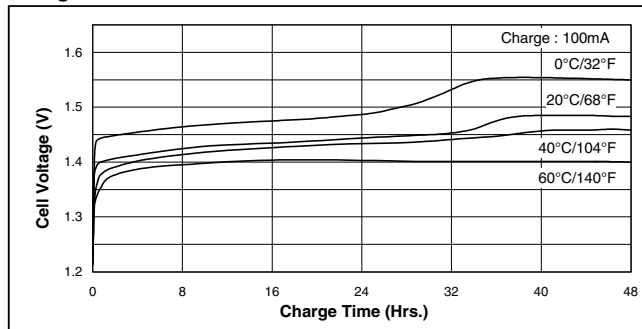


Discharge (at high rate)

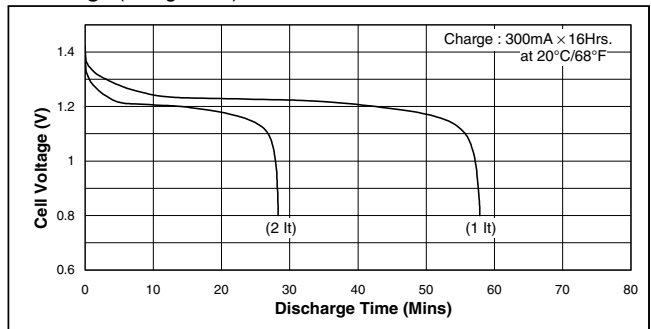


Charge

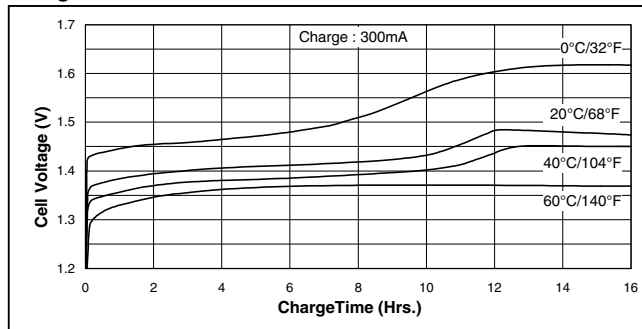


Discharge Trickle Charge (at high temperature)

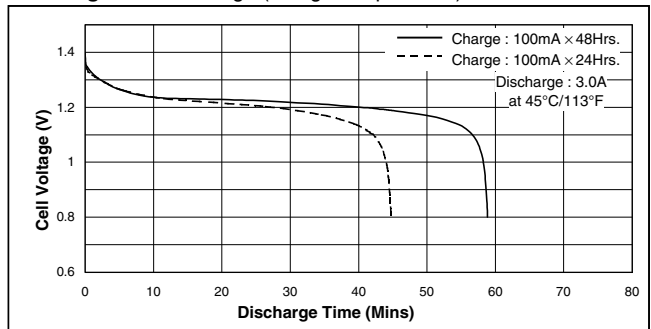

Discharge (at low rate)

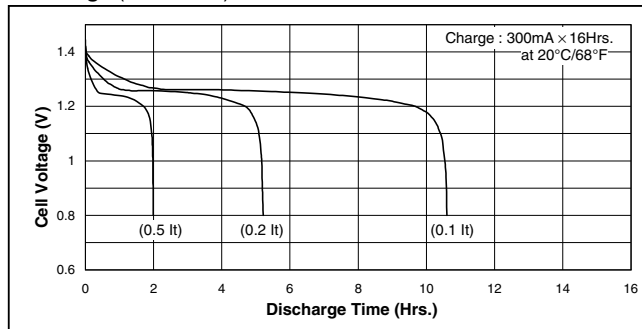

Temperature (Charge & Discharge)

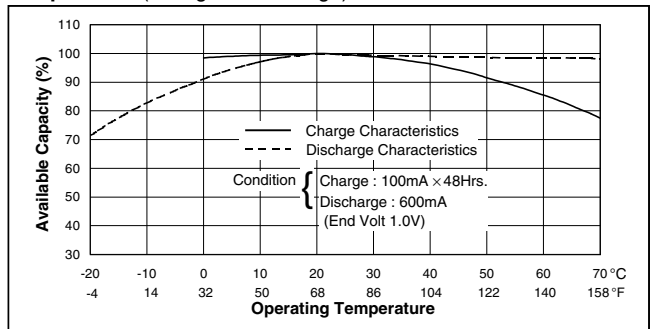

CD010830

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>