


Cell Type N-1000SCR Specifications


Nominal Capacity		1000mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	100mA	
	Quick	300mA	
	Fast	1500mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	10°C to +45°C [+50°F to 113°F]
		Fast	5°C to +40°C [+41°F to 104°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		4.5mΩ (at 1000Hz)	
Weight		41g/1.45oz	
Dimensions(D)×(H) (with tube)		22.9 ⁰ ₋₁ × 34.0 ⁰ _{-1.2} mm	
		0.90 ⁰ _{-0.04} × 1.34 ⁰ _{-0.05} inch	

Typical Characteristics


Charge (5 cells pack)

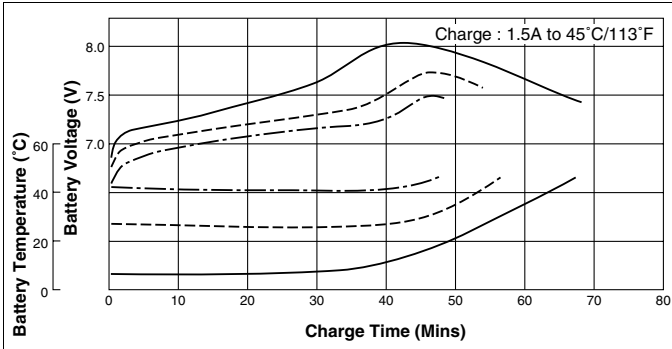


Discharge (at high rate)

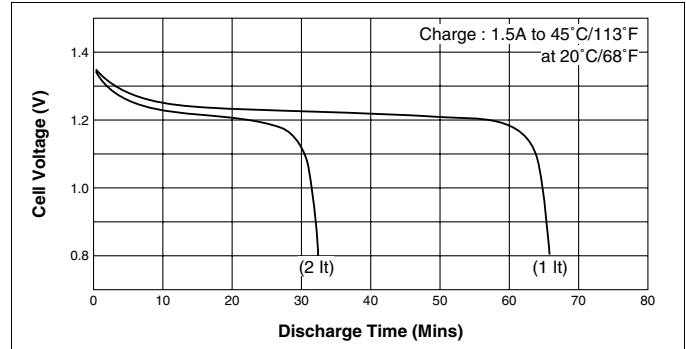


Cell Capacity (at various discharge rate)

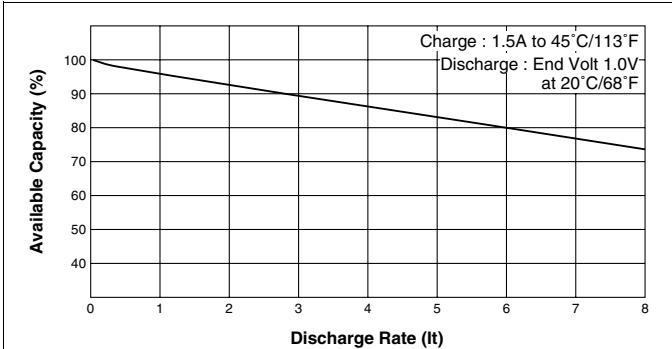


Discharge (at high rate)

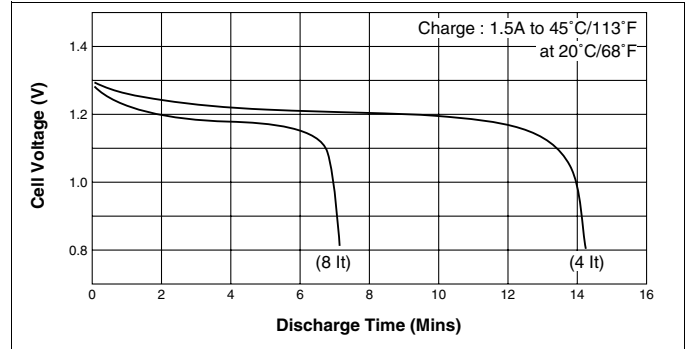

Discharge (at low rate)

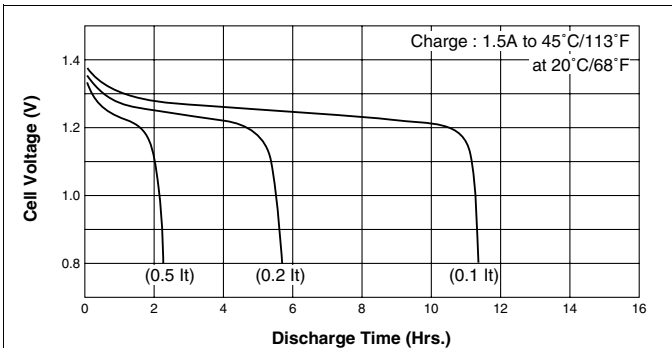

Temperature (Charge & Discharge)

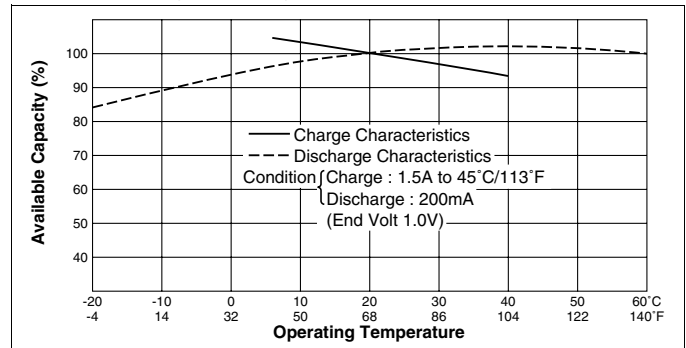

CD010830

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>