


SANYO Cadnica


Cell Type KR-600AAL Specifications

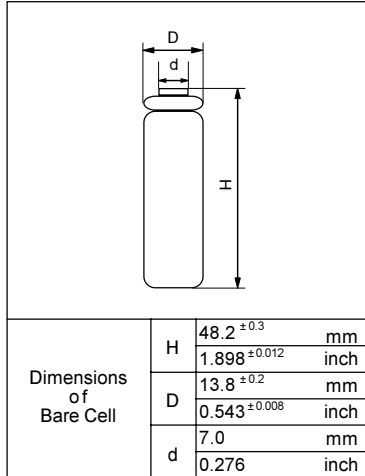


Nominal Capacity		600mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	60mA	
	Quick	120mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	7 to 8Hrs.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	0°C to +45°C [+32°F to 113°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
		Storage	
Internal Impedance (Av.) (at 50% discharge)		24.0mΩ (at 1000Hz)	
Weight		21g/ 0.74oz	
Dimensions(D)×(H) (with tube)		14.3 ⁰ _{-0.5} × 48.9 ⁰ ₋₁	mm
		0.56 ⁰ _{-0.02} × 1.93 ⁰ _{-0.04}	inch

Typical Characteristics


Charge

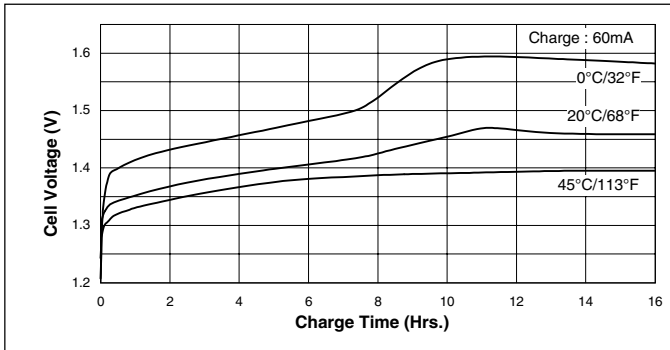


Discharge(at high rate)

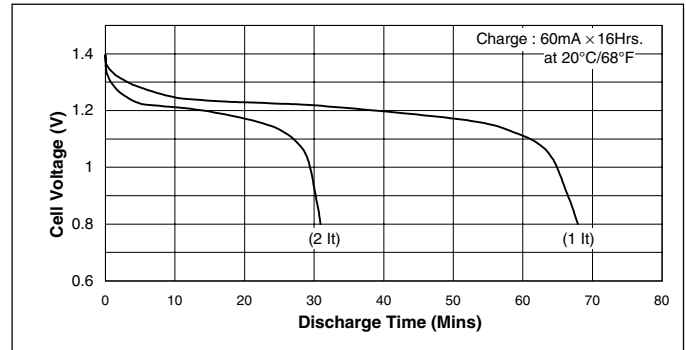


Charge

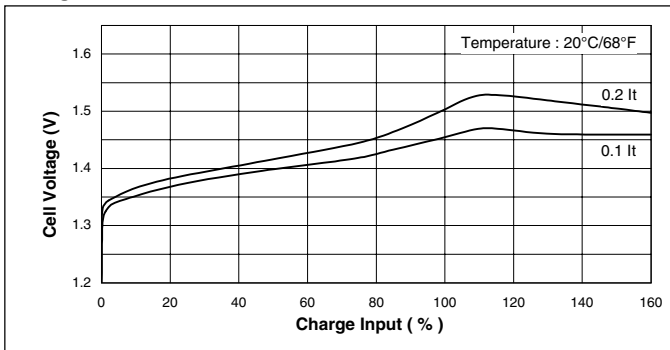


Discharge(at high rate)

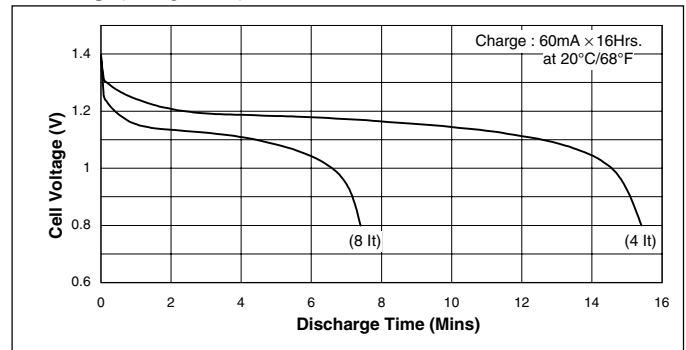

Discharge(at low rate)

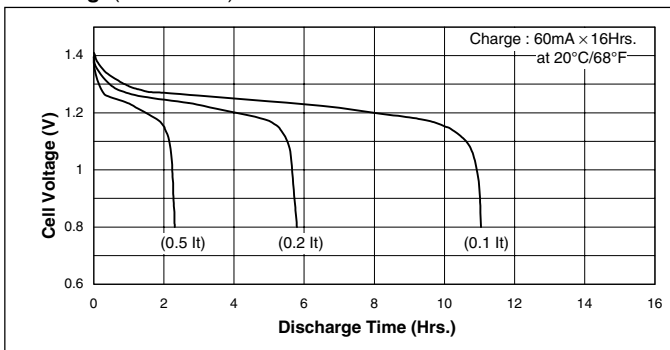

Temperature(Charge & Discharge)

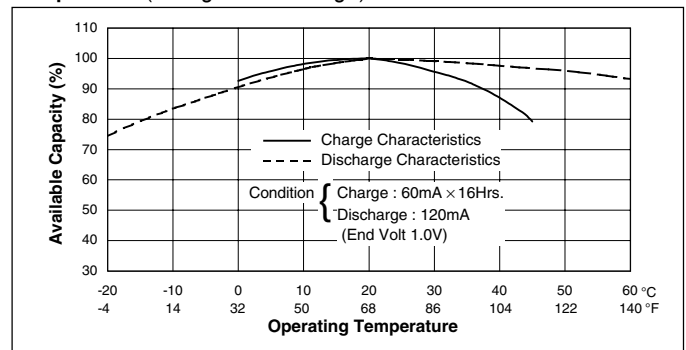

CD020808

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>