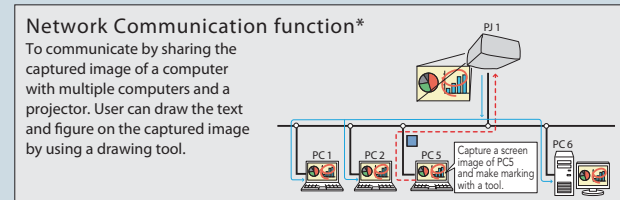
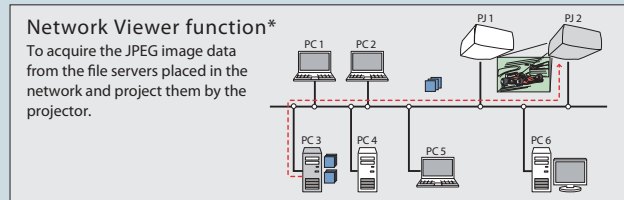
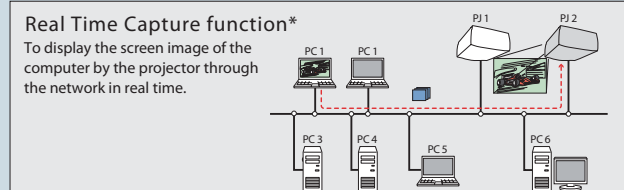
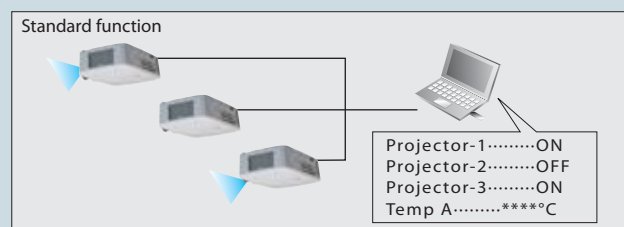


Network

A Wired LAN Network control function is included as standard equipment.
A centralized management and control system can be easily configured.




*Image transmission is compatible up to WXGA.

Responding to a Host of Large-Screen Needs

Conventions and Other Events




Project crisp, sharp images from a variety of sources - PCs, document cameras, BD Player and more. With the PLC-ZM5000's high output and brightness, there's no need to dim the room lights - so viewers can read handouts and take notes comfortably during the presentation. Using a PC gives you total control over image source switching, for easy, flexible large-screen presentations.

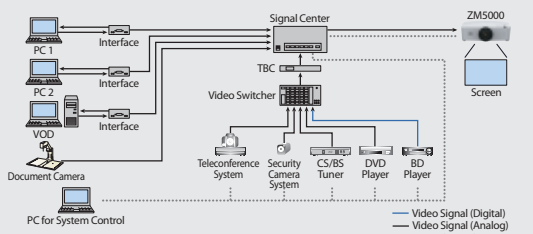

Theaters and Halls




Stack two PLC-ZM5000 units, and you can project images from high-definition sources onto a large screen at an even higher brightness level. Using a system control PC, all facets of the presentation - from start-up and brightness adjustment to image source switching - can be handled automatically. The PLC-ZM5000 is also ideal for "Cinema Advertising" - Works such as business commercials can be easily projected before or between movies.

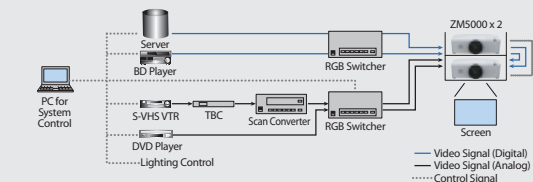

Monitor Control



You can configure a large-screen monitor system by using multiple PLC-ZM5000's in a rear projection system to project images onto a multi-screen display. Use it to reproduce complex visual information, such as network control schematics, maps, and images from surveillance cameras. Using a system control PC makes it easy to operate and manage this kind of system.

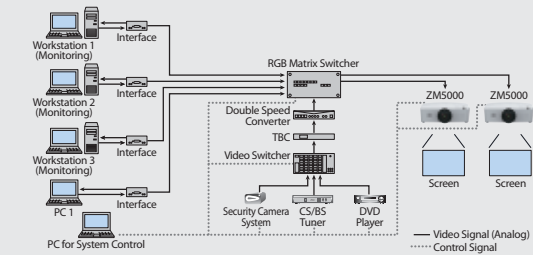

Specifications

Product Number	PLC-ZM5000L	
Panel	Size	0.76 inch TFT p-Si x 3 (Inorganic)
	No. of pixels	6,912,000 (1920 x 1200 dots x 3)
Projection Lens	Optional Lenses	
Projection Lamp	NSHA 330 W	
Brightness *1	5,000 lm (Lamp mode: Auto / Normal, Image mode: Dynamic)	
Uniformity *1	98 % (corner to center)	
Screen Size	40 - 400 inch (Dependent on Lens)	
Contrast Ratio *1	2000 : 1 (Iris: on, Lamp mode: Auto / Normal, Image mode: Dynamic)	
Speaker	10 W, Monaural x 1	
Power Lens Shift (Max)	Up / Down: +/- 60 %, Left / Right: +/- 10 %	
Keystone Correction (Max)	Vertical +/- 30 degrees, Horizontal +/- 30 degrees	
Signal Compatibility	Video	1080p/50, 1080p/60, 1080i/50, 1080i/60, 720p/50, 720p/60, 480i, 480p, 575i, 575p
	Computer	WUXGA / UXGA / WSXGA+ / SXGA+ / SXGA / WXGA / XGA / SVGA / VGA / MAC
Color Systems	NTSC / PAL / SECAM / NTSC4.43 / PAL-M / PAL-N	
Input 1	Signal input DVI-D (HDCP) x 1, HDMI (Ver.1.3 with Deep color) x 1 (Digital), Signal input D-sub15 x 1 (Analog RGB) (with SCART RGB)	
Input 2	Signal input S-BNC x 1 (G, B, R, H, V, V) (VIDEO/Y/Pb/Cb, Pr/Cr)	
Input 3	Signal input RCA x 1 Blue (Pb/Cb), Signal input RCA x 1 Red (Pr/Cr), Signal input Mini DIN 4-pin x 1 (S-Video)	
Monitor Out	Analog RGB Signal Output D-sub15 x 1 (*Analog input only, *Except several signals)	
Audio Input	1 : Mini jack x 1 (stereo), 2 : Mini jack x 1 (stereo), 3 : RCA x 2 (stereo, L (Mono) / R) x 1	
Audio Output	Mini jack x 1 (stereo) (*Variable out)	
Control	LAN (RJ-45) x 1, D-sub9pin x 1	
Other	D-sub25pin for Optional Network box (Back of cabinet), USB*2: Type-B x1, Wired R / C: Mini jack x 1	
Fan Noise	29 dBA (Eco1)	
Operating Temperature	5 - 40 celsius degrees	
Scanning Frequency (input)	Horizontal: 15 kHz - 120 kHz, Vertical: 48 Hz - 100 Hz, Dot Clock162 MHz (Analog)	
Power Source	AC 100 - 240 V, 50/60 Hz	
Power Consumption	100-120 V	Normal: 519 W, Standby: 0.4 W (Eco) / 2.4 W (Network)
	200-240 V	Normal: 488 W, Standby: 0.6 W (Eco) / 2.6 W (Network)
Dimensions (W x H x D)	19.3 inch x 6.5 inch x 14.6 inch	
Weight	19.8 lbs	
Main Accessories	Removable power cord x 1, D-sub 15 cable x 1, PIN code-locking label, Owner's manual (Quick Manual & CD-ROM), Remote control x 1 (AAA battery x 2)	

Replacement Lamp Type No. : 6103469607


*1 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards. Measurement method / conditions are based on Appendix 2. *2 USB interface does not guarantee that every USB device is compatible. * All product names and company names are trademarks or registered trademarks of their respective companies. * Product appearance and specifications are subject to change without notice.

Throw Distance: unit (m, ft) (Aspect ratio horizontal: vertical = 16:10)

Type	Short Fixed Lens	Short Zoom Lens	Standard Zoom Lens	Long Zoom Lens	Long Zoom Lens
Part Number	LNS-W21	LNS-W20	LNS-S20	LNS-T20	LNS-T21
Image					
Zoom / Focus	Fixed / Power	x1.3 / Power	x1.7 / Power	x1.6 / Power	x1.6 / Power
Focal Length (mm / inch)	13.05 / 0.51	20.4-27.6 / 0.80-1.09	26.9-45.4 / 1.06-1.79	45.6-73.8 / 1.80-2.91	73.9-117.1 / 2.91-4.61
F value	2.0	1.8-2.3	1.7-2.3	1.8-2.3	1.8-2.3
Lens Aperture (mm / inch)	101.6 / 4.00	115.0 / 4.53	93.5 / 3.68	88.5 / 3.48	88.5 / 3.48
Lens Weight (kg / lbs)	1.08 / 2.38	1.20 / 2.64	0.85 / 1.87	1.18 / 2.60	1.20 / 2.64
Projection Light Axis	H1:H2	1:1 (Fixed)	1:1-1.1 (approx.)	1:1-1.1 (approx.)	1:1-1.1 (approx.)
Light Axis W1:W2	1:1 (Fixed)	3:2-2:3 (approx.)	3:2-2:3 (approx.)	3:2-2:3 (approx.)	3:2-2:3 (approx.)
Throw Ratio	0.8:1	1.3-1.7:1	1.7-2.8:1	2.8-4.6:1	4.6-7.2:1
Throw Distance	m / ft	m / ft	m / ft	m / ft	m / ft
Inch W x H (m)	Fixed	Wide / Tele	Wide / Tele	Wide / Tele	Wide / Tele
40	0.9 x 0.5	0.63 / 2.07	1.0 / 3.3	1.4 / 4.6	2.3 / 7.5
60	1.3 x 0.8	0.97 / 3.19	1.6 / 5.2	2.1 / 6.9	3.5 / 11.5
80	1.7 x 1.1	1.32 / 4.32	2.1 / 6.9	2.8 / 9.2	4.7 / 15.4
100	2.2 x 1.3	1.66 / 5.45	2.7 / 8.9	3.5 / 11.5	5.9 / 19.4
120	2.6 x 1.6	2.00 / 6.57	3.2 / 10.5	4.2 / 13.8	7.1 / 23.3
150	3.2 x 2.0	2.52 / 8.26	4.0 / 13.1	5.3 / 17.4	8.9 / 29.2
200	4.3 x 2.7	3.38 / 11.08	5.3 / 17.4	7.2 / 23.6	11.9 / 39.0
250	5.4 x 3.4	4.24 / 13.90	6.7 / 22.0	9.0 / 29.5	14.9 / 48.9
300	6.5 x 4.0	5.10 / 16.72	8.0 / 26.2	10.6 / 32.7	17.9 / 55.7
350	7.6 x 4.7	5.95 / 19.54	9.4 / 30.8	12.3 / 39.9	20.9 / 64.6
400	8.6 x 5.4	6.81 / 22.35	10.7 / 35.1	14.1 / 45.6	23.9 / 73.4
					24.0 / 74.7
					28.1 / 87.2
					30.1 / 97.3
					32.1 / 106.3

* Approximate projection distances are calculated based on lens specifications. Individual lenses may diverge from this figure by up to 5% due to slight variations in lens size and shape.

External Dimensions (unit: mm (inch))

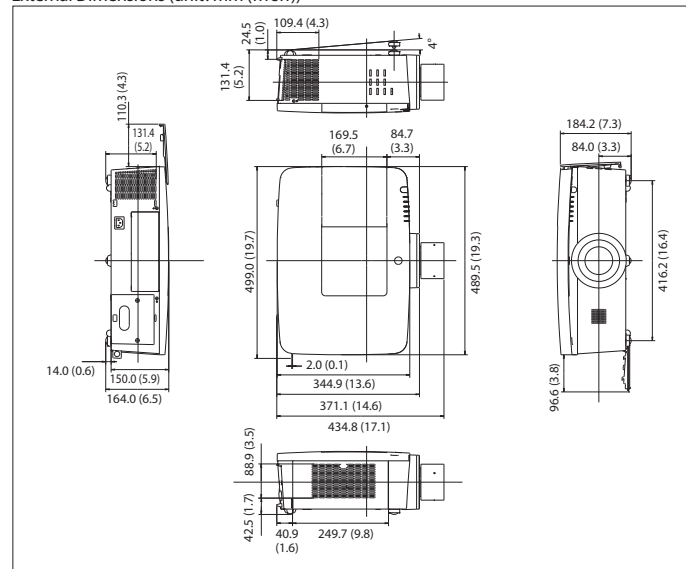

Terminals



Remote Control



PLC-ZM5000L
WUXGA 5000lm



SANYO Presentation Technologies
Toll free: 888-337-1215 www.sanyoprojectors.com


© 2010 SANYO North America Corporation.

WUXGA Portable Projector

Ultra Portable Multimedia Projector



PLC-ZM5000L

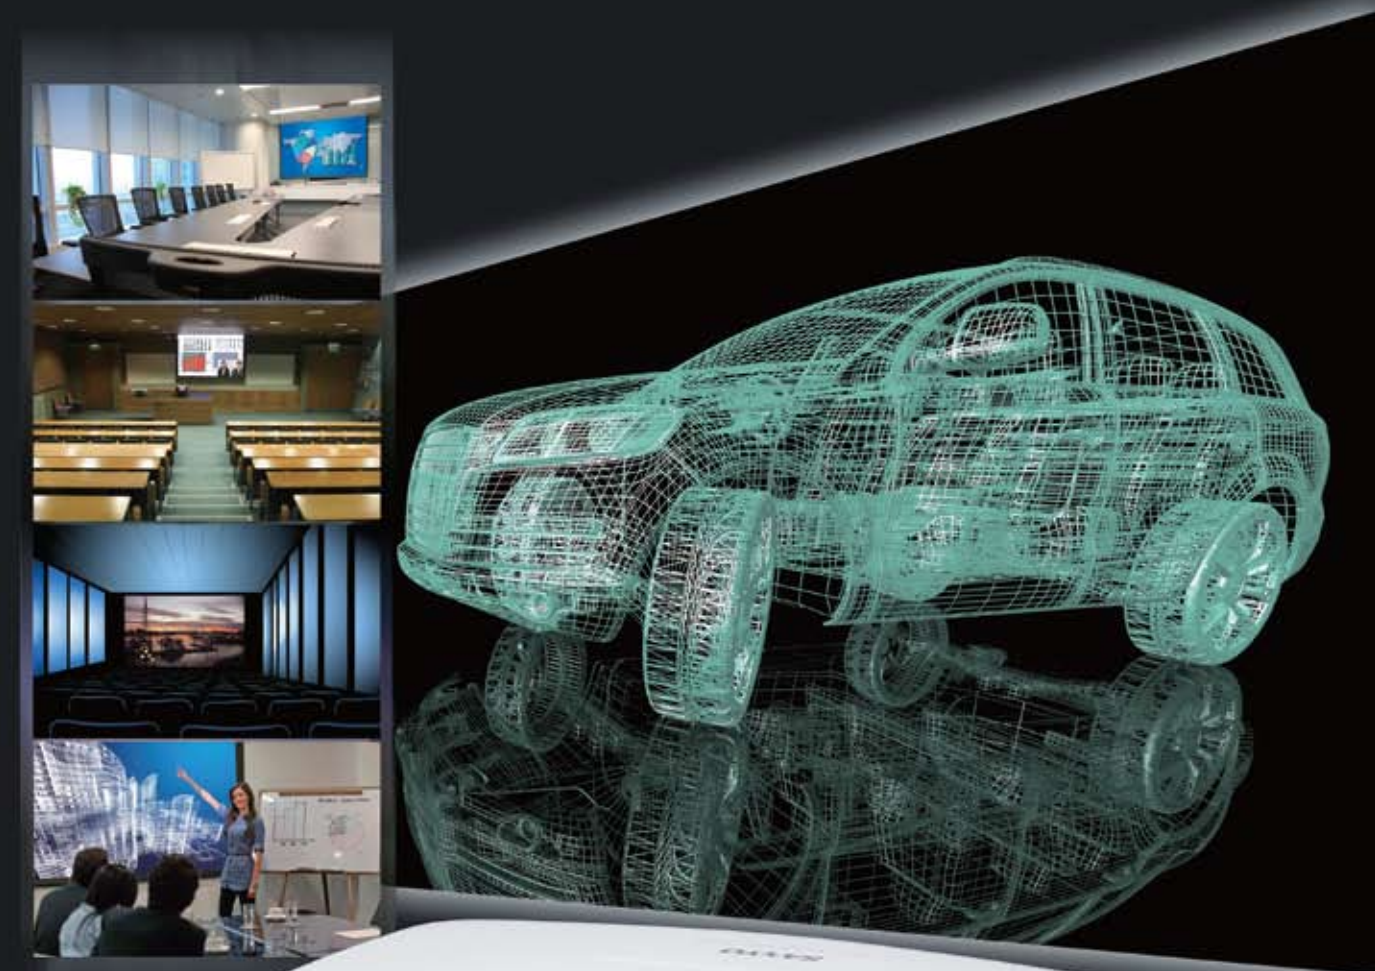

WUXGA Multimedia Projector
PLC-ZM5000L
5,000 lumens of Brightness



WUXGA Projector beyond Full HD Resolution For Professional Use



CAD / Design



Hall



Simulation



Advertising and Cinema-Adverts



Education



Business



Exhibitions, Event and Amusement


Features a highly reliable new optical engine with inorganic panels, this projector has a brightness of 5000 lumens*1 and a high contrast of 2000:1*. Naturally suited to use in venues such as large meeting rooms, conference rooms CAD / Design and lecture halls, the projector is also ideal for projecting digital signage in bright places.

*1 Lamp mode: Auto / Normal, Image mode: Dynamic *2 Iris: on, Lamp mode: Auto / Normal, Image mode: Dynamic

High Resolution WUXGA Panel

16:10 Wide-Screen Aspect Ratio LCD Panels

The adoption of a high-resolution WUXGA panel enables projection of 16:10 aspect ratio WUXGA (1920 x 1200 dots) images. Compared to the Full HD (1920 x 1080 dots) format, the size of the screen has been greatly expanded, enabling the display of even more information.

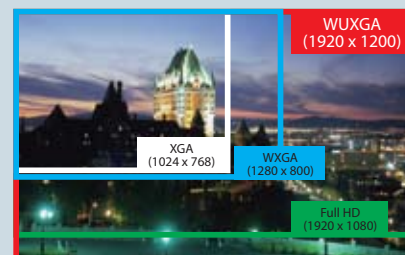

Easy Installation

Lens Center Layout

A symmetrical design with the lens in the center of the projector has been adopted for ceiling installation. This allows the projector and the screen to be centered together, which not only makes design and installation much easier, but also offers a sense of stability through the positioning between projector and screen.




Powered Lens Shift & Powered Zoom and Focus

All models are equipped with a Powered Vertical/Horizontal Lens Shift function and an Electrical Zoom/Focus function that lets you adjust the projection position without having to move the projector. The powered function makes it easy to achieve fine positioning adjustments, using the remote control, even for projectors installed in high places.

Powered Lens Shift (Vertical, Horizontal)

Featuring both vertical and horizontal lens shift (vertical: +/- 60%, horizontal: +/-10% (maximum)), the ZM series enables intuitive operation for easy on-site setup.



Powered Zoom and Focus

Zoom and focus can be carried out electronically, so that adjustments can be made easily (smoothly). Of course operations can also be carried out using the remote control, so that adjustments can be carried out easily from a distance even after the projector has been installed in a high location.




* LNS-W21: Fixed Zoom

A Wide Range of Optional Lenses for All Types of Installations

5 different optional lenses for various uses

Projection distance of standard lens (to 100 inch screen)

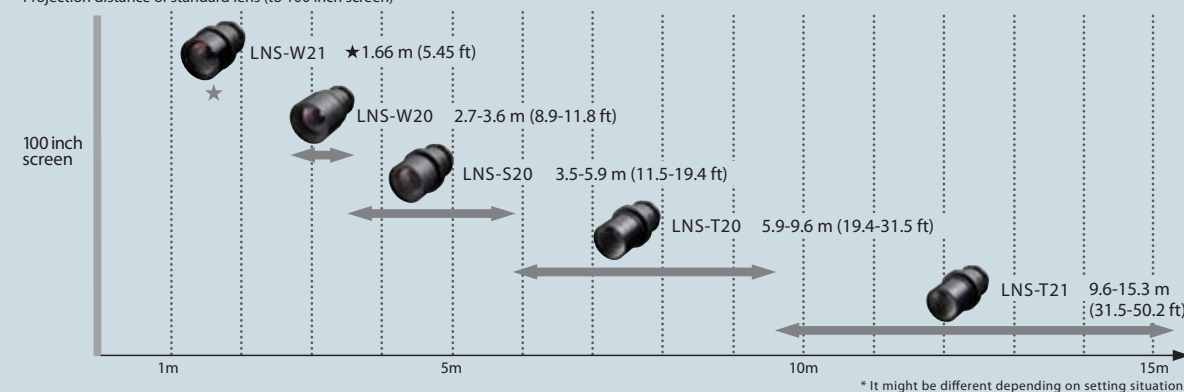

* It might be different depending on setting situation


Interchangeable Lenses (Option)

To enable projection in various locations, the lens lineup extends from short to long focus lenses. No additional tools are necessary for changing lenses. Simply press the button and screw in the interchangeable lens.



Tilted Installation Possible (360° Tilt Angle)


The projector can be installed at a 360° tilt angle in the vertical direction. This makes it possible to project images facing directly above or below the projector.

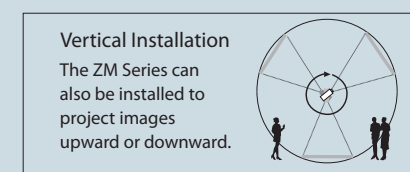

Vertical Installation
The ZM Series can also be installed to project images upward or downward.

Corner Keystone Function

The Corner Keystone function corrects trapezoidal distortion. To square the image, simply designate the four corners with the remote control or projector buttons. The corrected data is stored in memory, so rectangular screens can be displayed with permanently installed projectors at lecture hall and conference room.

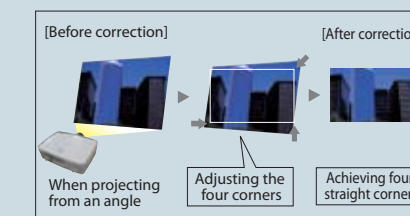

Easy Maintenance

Easier Replacement


Lamp replacement has been simplified to make maintenance easier. Easy removal and replacement of the lamp from the top. The lamp can also be replaced easily even if the projector is ceiling mounted.



Active Maintenance Filter (AMF) System

The "AMF: Active Maintenance Filter" system enables a filter cartridge replacement interval of approximately 10,000 hours*3. One cartridge containing a filter roll equal to 10 filters reduces the filter cartridge replacement frequency to one-tenth. Consequently, high reliability is provided with lower maintenance costs, while saving resources.

*3 When lamp mode: Normal is selected. It would be 13,000 hours when "Eco mode" is selected. This value is calculated through the company's independent test in reference to the JIS D0207 test method. The filter replacement period is an estimate and changes according to the use environment.

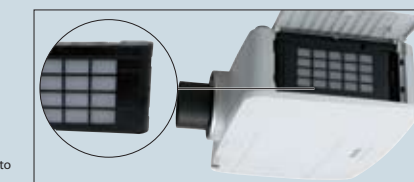

Useful Feature

Picture in Picture, Picture by Picture

"Picture in Picture" and "Picture by Picture" function

Two images can be projected simultaneously on a split screen, useful for situations such as TV conference.

P in P (Picture in Picture)

Image size and position are adjustable
Example <Product introduction>
At TV conference between A and B
Main screen: Presentation content
Sub screen: Party at the other side of the line
It is possible to share the information while seeing each other's face.



P by P (Picture by Picture)

Image size and position are fixed
Example <Use in class>
At science experiment
Left screen: DVD movie
Right screen: Teaching material
It is possible to project both video and materials.



Mechanical Shutter System

The Mechanical Shutter system is popular for a variety of professional uses. It allows this star-studded selection of SANYO Portable projectors to meet a host of demanding business needs, including meetings, entertainment and promotional applications.

Auto Input Signal Search

When using a conventional projector, you have to physically select the input signal. Auto Input Signal Search automatically determines the input signal when the projector is installed and the power is turned on, and sets the input for you.

10-Watt Speakers

High-output 10-watt speakers built into the projector produce powerful sound in spaces such as conference rooms and classrooms.

Antitheft Hook

The antitheft hook lets you attach a Security Device to the projector for protection against theft.

HDMI and DVI Terminal

The ZM series comes equipped with an HDMI terminal and DVI terminal. Video signal can be connected to HDMI and PC signal to DVI terminal directly, so it is possible to offer a variety of images with beauty and luster.

Screen Aspect Function

When the screen aspect is set according to the aspect ratio of used screen, the image that does not protrude from the screen can be projected.

WUXGA
Multimedia Projector
PLC-ZM5000L
5,000 Lumens
Brightness



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>