


High Resolution SmartDome Camera SCC-C7433/C7435 **NEW**



Features

- 1/4" 410K/470K pixels Ex-View HAD PS CCD (SCC-C7435)
1/4" 410K/470K pixels Super HAD IT CCD (SCC-C7433)
- 32x optical zoom lens (16x D-zoom)
- High resolution : 540(Color)/570(BW) TV lines
- Day & Night (moving filter)
- Minimum scene illumination :
(SCC-C7435 : 0.001 Lux (15 IRE, 256x Sens-up, Color)
SCC-C7433 : 0.002 Lux (15 IRE, 256x Sens-up, Color))
- 128x(NTSC) / 160x(PAL) WDR function (SCC-C7435)
- Full auto focus function
- Pan (max 400°/sec), tilt (200°/sec)
- 360° endless pan(slip-ring), 0~180° tilt
- RTC function for schedule setting
- Multi-protocol (more than 8 companies), multi-OSD
- Remote control : RS485(half & full duplex)/RS-422
- Operating temp. (-45°C~50°C) with fan / heater
- Water / dust resistant(IP66)

Dimensions (unit:mm)

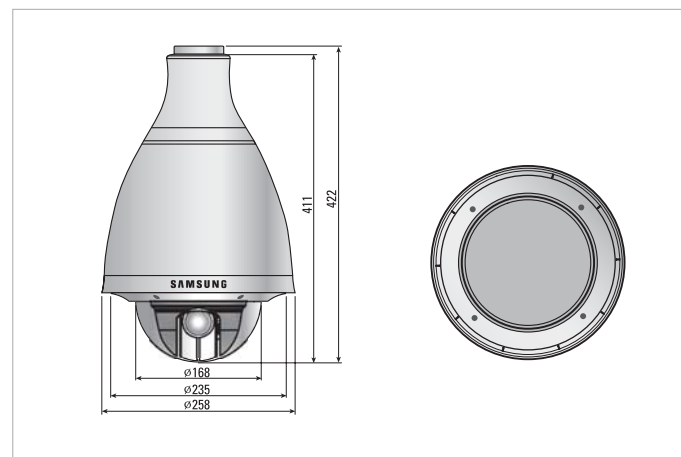

Specifications

Model	SCC-C7433(P)	SCC-C7435(P)		
Camera Type	Color			
Image	Device	1/4" Super-HAD IT CCD / 1/4" Ex-View-HAD CCD		
	Effective Pixels	NTSC : 768 x 494 / PAL : 752 x 582		
Min. Scene Illumination	Color	0.6 Lux(15IRE, Sens-up Off) / 0.3 Lux(15IRE, Sens-up Off) 0.002 Lux(15IRE, Sens-up 256x) / 0.001 Lux(15IRE, Sens-up 256x)		
	B/W	0.06 Lux(15IRE, Sens-up Off) / 0.03 Lux(15IRE, Sens-up Off) 0.0002 Lux(15IRE, Sens-up 256x) / 0.0001 Lux(15IRE, Sens-up 256x)		
PAN/TILT	Speed	Manual Pan	0 ~ 180°/sec	
		Preset Pan	400°/sec	
		Manual Tilt	0.1 ~ 90°/sec	
		Preset Tilt	200°/sec	
	Range	Panning	0~360°/sec (Endless)	
		Tilting	0~180°	
	Number of Auto PAN	4		
	Number of Preset	128		
	Number of Pattern	3		
	Functions	Number of Privacy Zone	16	
Day & Night		Color/BW/Auto (Moving Filter)		
Line Lock		INT/Line Lock		
White Balance		ATW1/ATW2/AWC/MANUAL		
D-Zoom		Yes (~16x)		
High Speed Shutter		Yes (OFF ~ 1/10K)		
Motion Detection		Yes		
Sens Up		Yes(2x ~ 256x)		
Camera ID		Max 20 Character		
Remote Control		RS485(Half&Full Duplex)/RS422		
Alarm	Input	8		
	Output	3(Open Collector 1 relay)		
Wide Dynamic Range	N/A	Yes		
Horizontal Resolution	540(Color)/570(BW) TV Lines			
Video Output	VBS 1.0Vp-p			
S/N Ratio	about 50 dB			
Lens	Focal Length	3.55 ~ 113mm		
	Zoom ratio	32x Optical		
	Aperture Ratio	F1.69(W)/F4.2(T)		
	Viewing Angle	Tele	1.78°(H) x 1.34°(V)	
		Wide	56.41°(H) x 43.01°(V)	
Operating Temperature	-45°C ~ + 50°C			
Operating Humidity	Less than 90%			
Power Requirement	NTSC : AC24V, 60Hz / PAL : AC24V, 50Hz			
Power Consumption	24W (Only Camera) / 55W (With Fan & Heater)			
LED Indicator	Yes			
Dimensions	258(Ø) X 422(H)mm			
Weight	5,950g			
Color	Silver			

In/Outdoor Housing SHG-120/220



Features

SHG-120

- For indoor use
- The place of installation should be able to bear up to 4 times of the total product weight (about 32Kg).
- Aluminum material
- IP 66


SHG-220

- For outdoor installation
- Aluminum material
- Built-in fan/heater function
- IP 66
- Anti-vandal


Specifications

Model	SHG-120	SHG-220
Dimensions	174(Ø)x188(H)mm	266mm(Ø)x273(H)mm
Weight	1.2Kg	3.7Kg
Operating Temperature	-10~+50°C	-40~+50°C
Operating Humidity	0~90%	0~100%
Fan Operating Temperature	-	Always
Heater Operating Temperature	-	10°C or below
Accessories	Screw(BH M3xL8) 2EA	Screw(BH M3xL12) 3EA Pin 3EA Silicon Grease 5g Teflon Tape 1EA

Installation

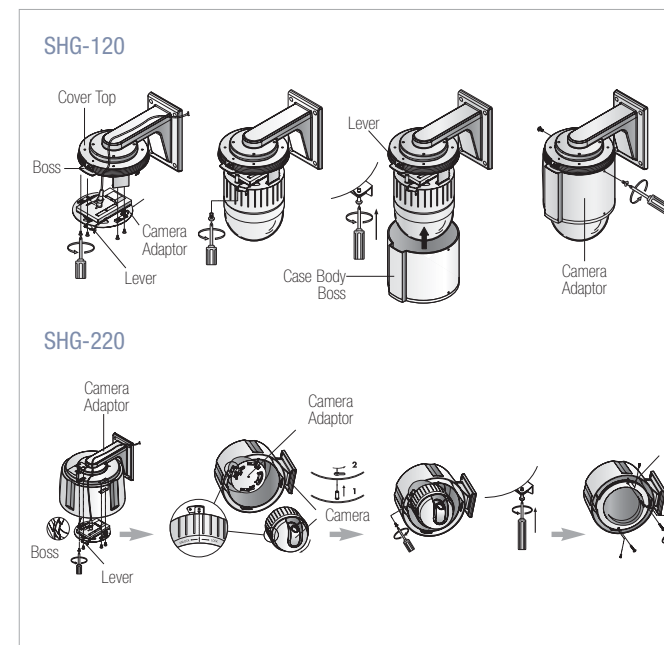

Dimensions (unit:mm)

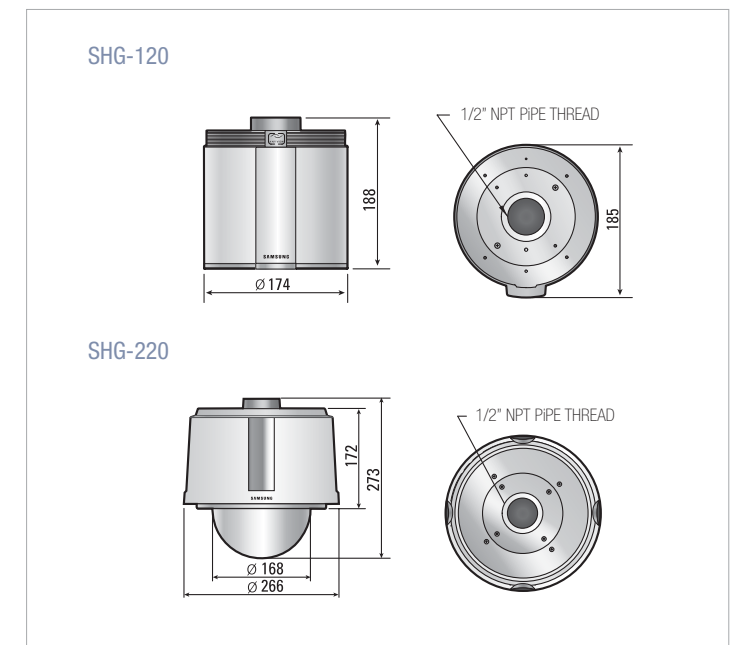

Outdoor Housing SHG-222 **NEW**




Features

- Hanging mount adaptor(included)
- Outdoor use
- Solid structure
- Aluminum/plastic material
- Applicable camera : SCC-C6433/C6435
- Applicable wall mount adaptor : SADT-103WM


Specifications

Model	SHG-222
Materials	Aluminum & Plastic
Dimensions	258(Ø) x 422(H)mm
Weight	3.8Kg(NET)
Operating Temperature	-40~+50°C
Operating Humidity	0~100%
Fan Operating Temperature	Always
Heater Operating Temperature	Below 4°C


Installation

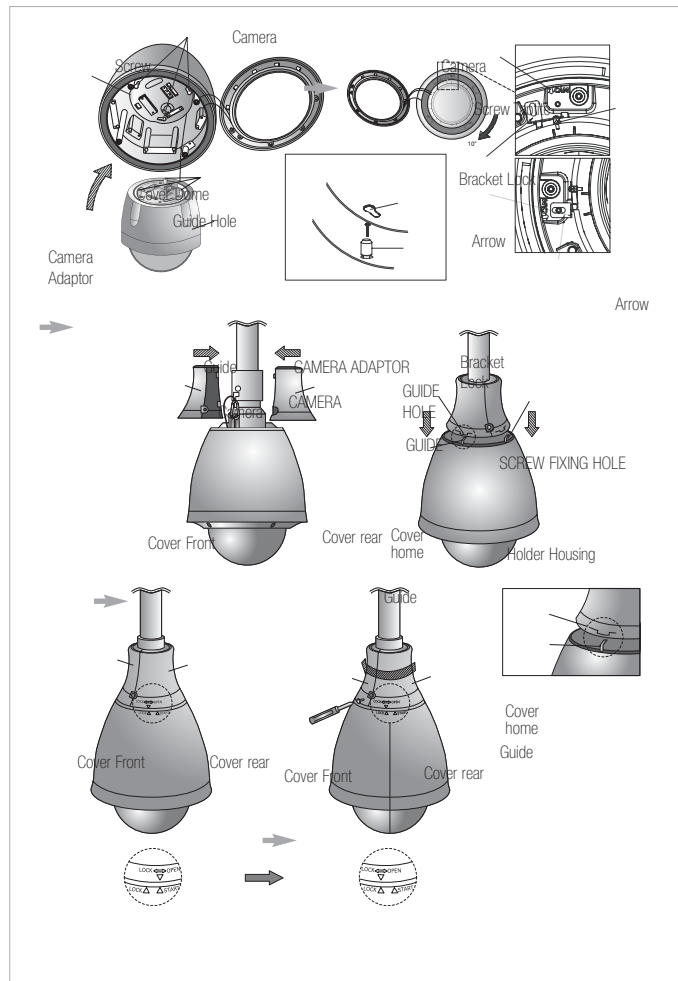

Dimensions (unit:mm)

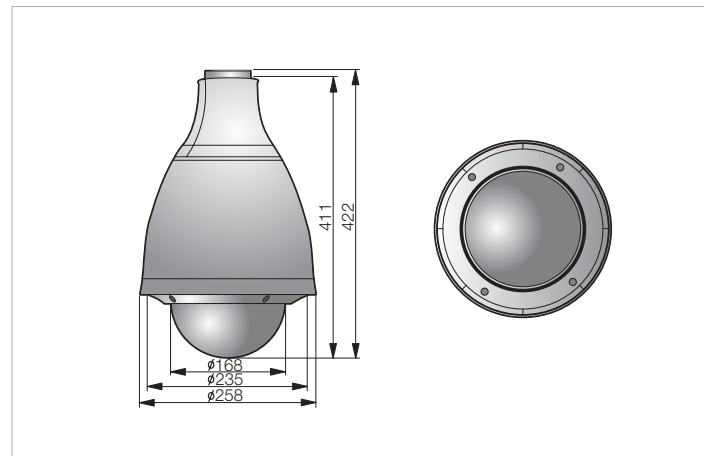

Wall Mount Adaptor SADT-100WM SADT-101WM SADT-102WM

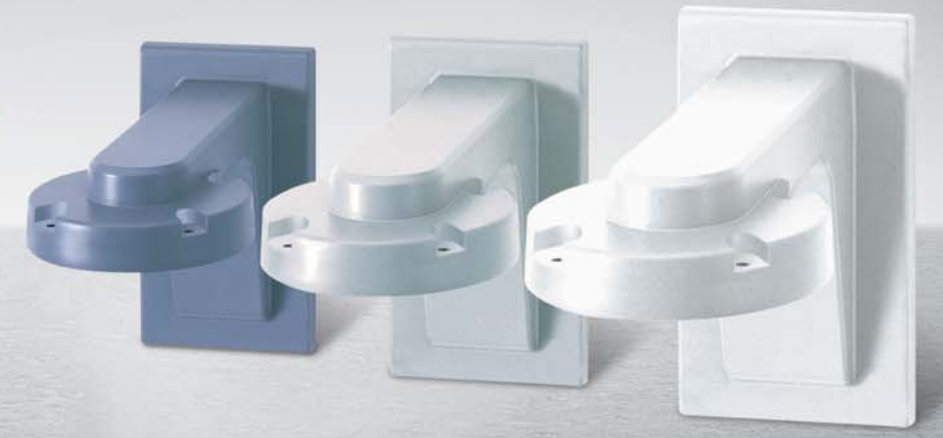


Features

- Indoor/outdoor use
- Solid structure
- Aluminum material
- Gasket provides waterproof function
- Screws included, for camera mounting


Specifications

Model	SADT-100WM	SADT-101WM	SADT-102WM
Weight	800g		
Operating Temperature	-40 ~ +50°C		
Operating Humidity	0~100% RH		
Accessory	Gasket 1EA, Cable Grand(PG-11, PG-13.5), Back Plate 1EA		
	Back Plate 1EA		
	Screw(FH M3xL6) 6EA		
	Screw(PH M4xL22) 2EA	Screw(PM M4xL22) 2EA	Screw(PM M4xL22) 4EA
Applicable Camera	SCC-641/643A SCC-C640X SCC-C6475	SCC-931T	SCC-C9302 SCC-B539X

Installation

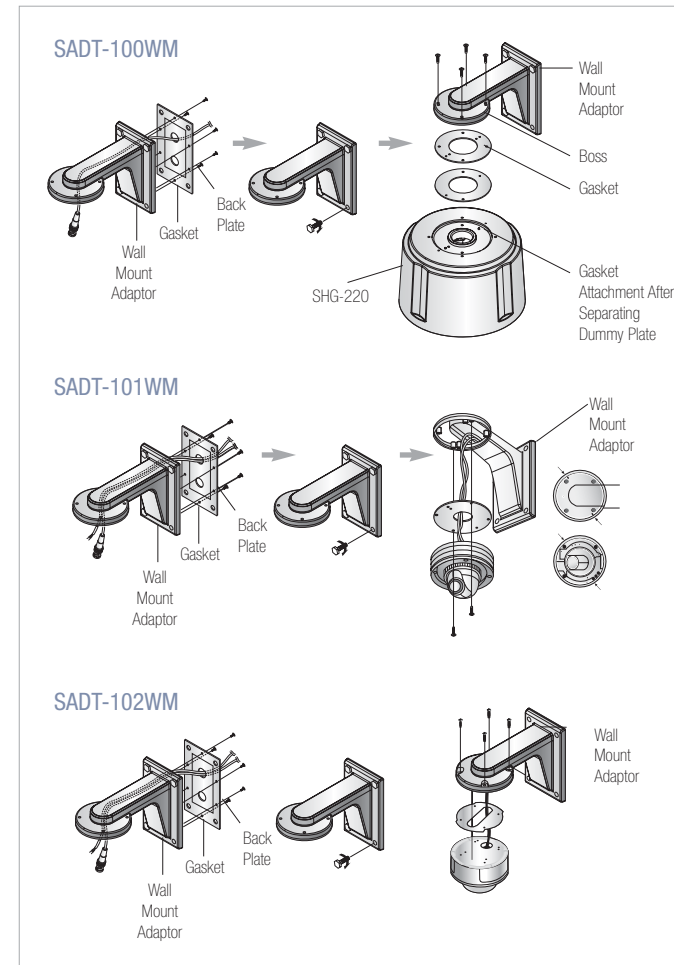

Dimensions (unit:mm)

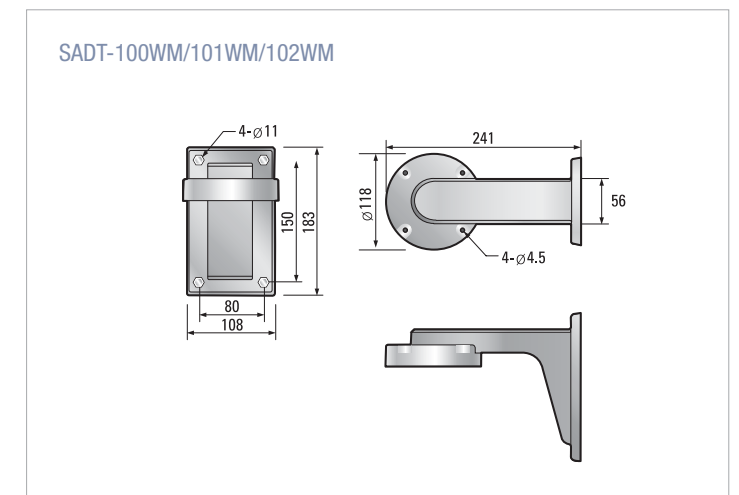

Wall Mount Adaptor

SADT-103WM NEW

SADT-104WM



Features

SADT-103WM

- Wall mount adaptor
- Indoor/outdoor use
- Solid structure
- Aluminum material
- Applicable camera : SCC-C7433/C7435
- Applicable housing : SHG-222


SADT-104WM

- Wall mount adaptor
- Indoor use
- Solid structure
- Plastic material
- Applicable camera : SCC-C6433/C6435

Specifications

Model	SADT-103WM	SADT-104WM
Materials	Aluminum	Plastic
Dimensions	114(W) x 200(D) x 223(H)mm	114(W) x 200(D) x 242(H)mm
Weight	1250g	241g
Operating Temperature	-40~+50°C	-10~+50°C
Operating Humidity	0~100%	-

Dimensions (unit:mm)

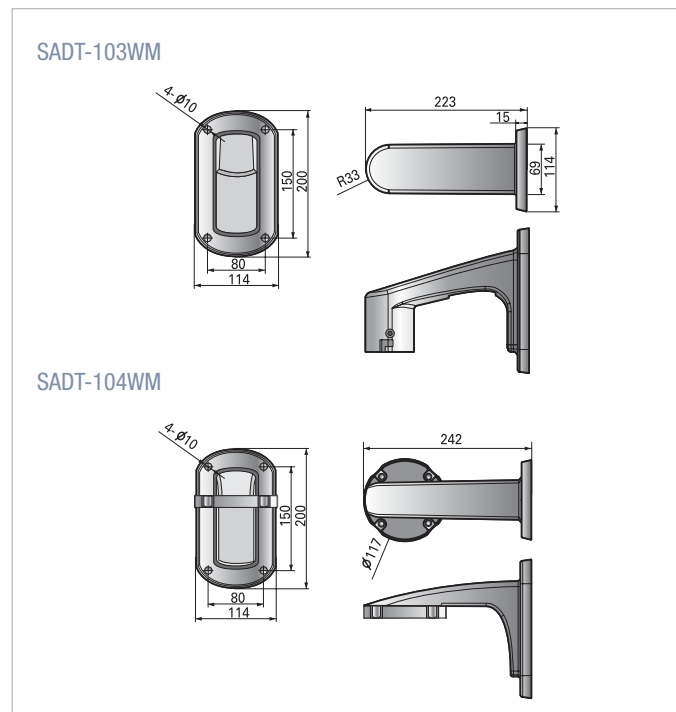

Ceiling Mount / Corner Mount / Pole Mount Adaptor

SADT-100CM

SADT-110CM

SADT-100PM



Features

SADT-100CM

- Indoor/outdoor use
- Solid structure
- Metallic material


SADT-100PM SADT-110CM

- Indoor or outdoor applications
- Supports up to 88 pounds(40Kg) : SADT-100PM
- Supports up to 97 pounds(44Kg) : SADT-110CM
- Metallic body

Specifications


Model	SADT-100CM	SADT-110CM	SADT-100PM
Weight	1.2Kg (including the pipe)	2.1Kg	1.4Kg
Operating Temperature	-40 ~ +50°C		
Operating Humidity	0 ~ 100%		
Accessory	1.5" NPT Pipe(300mm) 1EA Decoration Cover 1EA Cable Grand(PG-13.5) 2EA	Stainless Bolt 4EA Spring Washer 4EA	Stainless Steel Mounting Strap 2EA Stainless Bolt 4EA Spring Washer 4EA

Installation

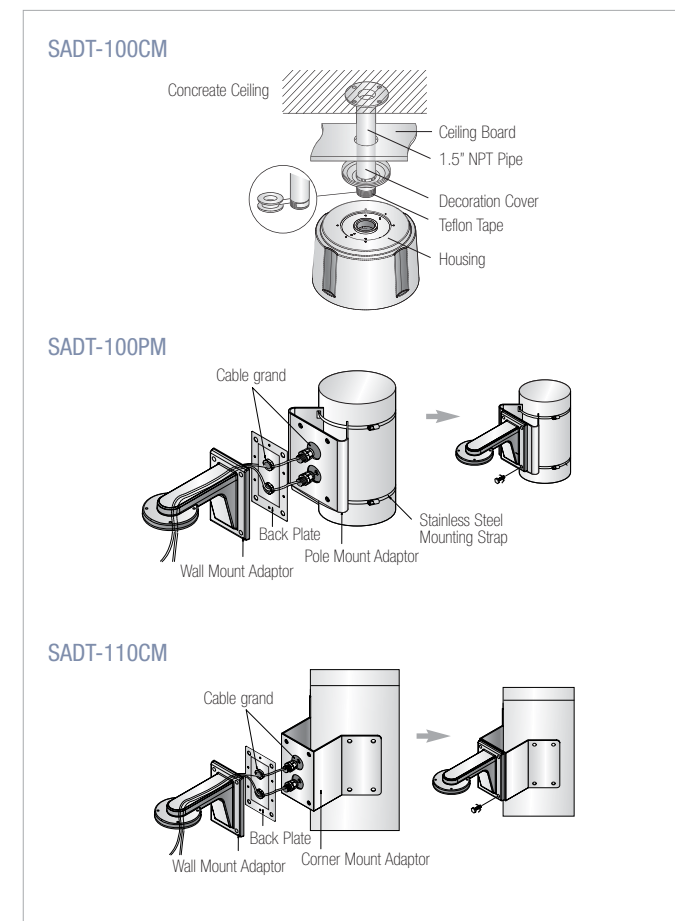

* Conditions for Installation : When installing outdoors, stainless steel must be used for the connecting materials (i.e. screws).

Dimensions (unit:mm)

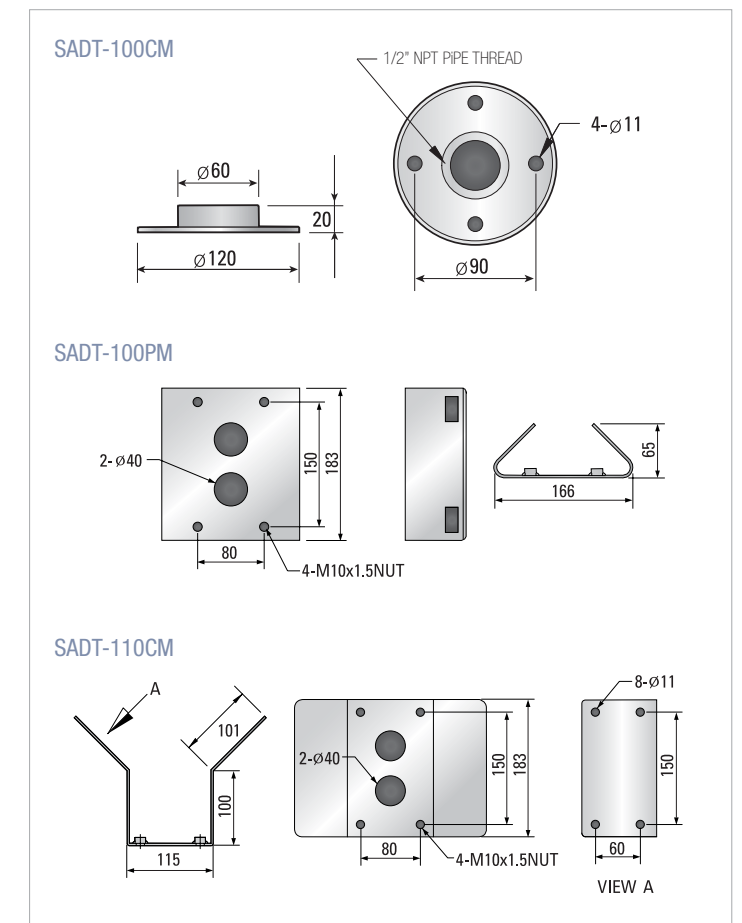

Hanging Mout Adaptor SADT-100HM **NEW**




Features

- Hanging mount adaptor
- Indoor use
- Solid structure
- Aluminum material
- Applicable camera : SCC-C6433/C6435


Specifications

Model	SADT-100HM
Materials	Aluminum
Dimensions	117(Ø) x 68(H)mm
Weight	259g
Operating Temperature	-10~+50°C

Dimensions (unit:mm)

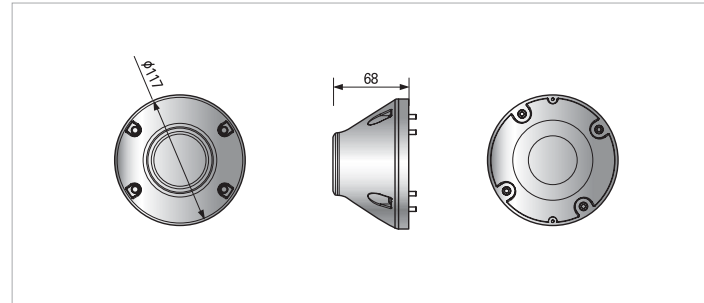

Ceiling-Mount Bracket SBR-100DCM

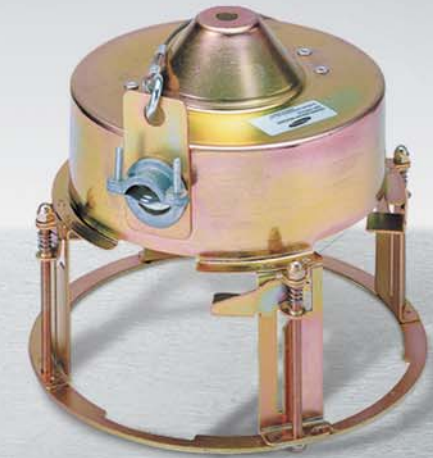


Features

- Solid structure
- Metallic material

Specifications


Model	SBR-100DCM
Dimensions	196x160mm
Weight	700g
Operating Temperature	-10 ~ +50°C
Accessory	Safety Wire 1EA, Safety Bracket 1EA Template A 1EA Template B 1EA, L-Shaped BNC Adaptor 1EA

Installation

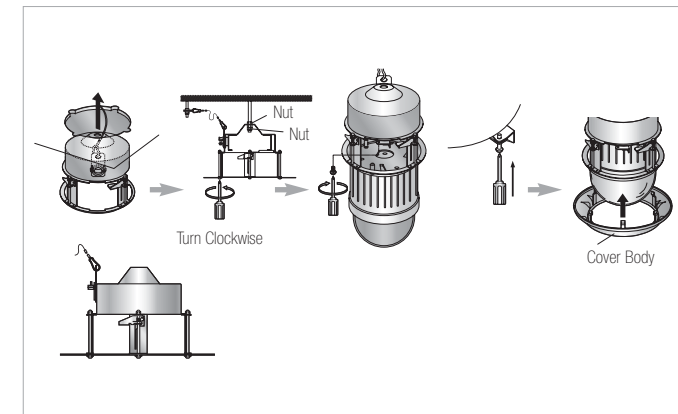

* Conditions for Installation : The installation place should be able to bear up to 4 times the total product weight (about 16Kg).
This product is to be used when the thickness of the ceiling board is less than 40mm.
This product requires a minimum of 180mm space above the ceiling board.

Dimensions (unit:mm)

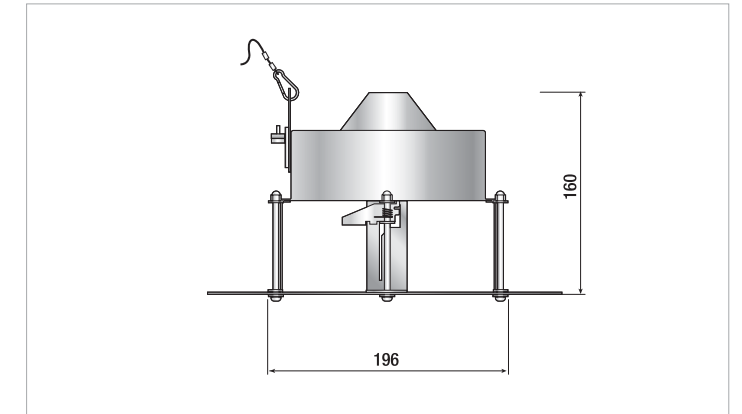

Ceiling Mount Bracket

SADT-100EC NEW

SADT-101EC



Features

SADT-100EC

- Ceiling mount bracket
- Plastic material
- Applicable camera : SCC-641/643, SCC-C6403/C6405/C6407, SCC-C6475


SADT-101EC

- Ceiling mount bracket
- Plastic material
- Applicable camera : SCC-C6433/C6435


Specifications

Model	SADT-100EC	SADT-101EC
Materials	Plastic	
Dimensions	235(Ø) x 210(H)mm	
Weight	765g	792g
Operating Temperature	-10~+50°C	

Installation

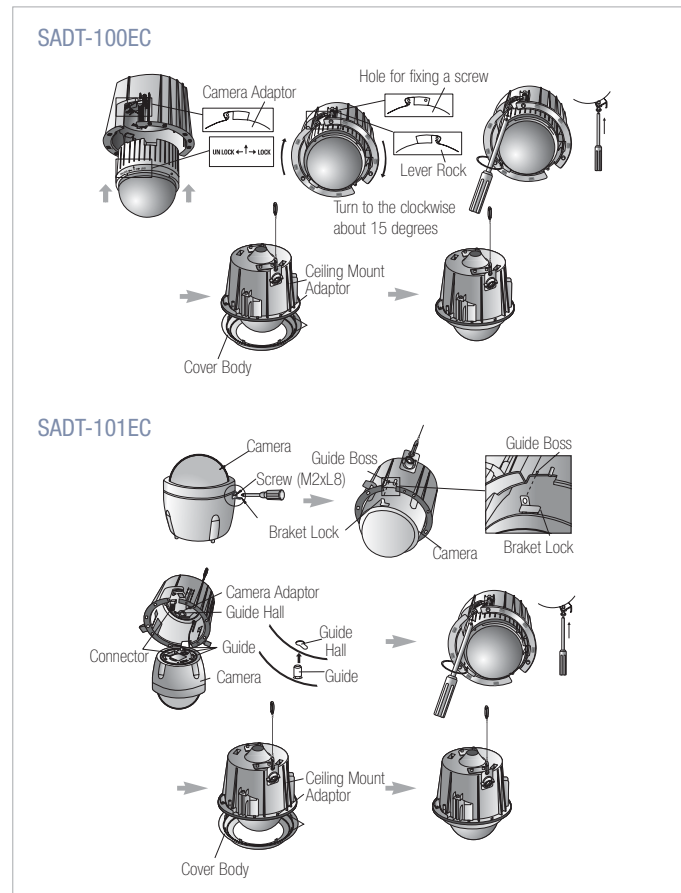

Dimensions (unit:mm)

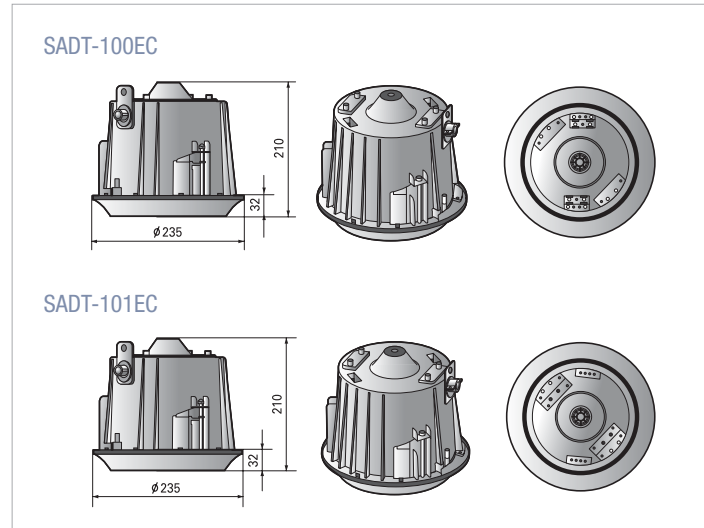

* Conditions for Installation : The installation place should be able to bear up to 4 times of the total product weight (about 16Kg).
This product is to be used when the thickness of the ceiling board is less than 40mm.
This product requires a minimum of 180mm space above the ceiling board.

CAMERA

MONITOR

DVR

NETWORK

CONTROLLER

EZ VIEW



Monitor



Flat Color Monitor

SMC-150/152F_62
SMC-210/212F_63
SMC-213/214_64

LCD Monitor

SMT-1721/1921_65
66SMT-1722/1922_66
SMT-3211/4011_67

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>