


COLOR DOME CAMERA

PROVIDEO

speco technologies

MODEL:CVC-6405DC

VARIFOCAL LENS 4mm -- 9mm

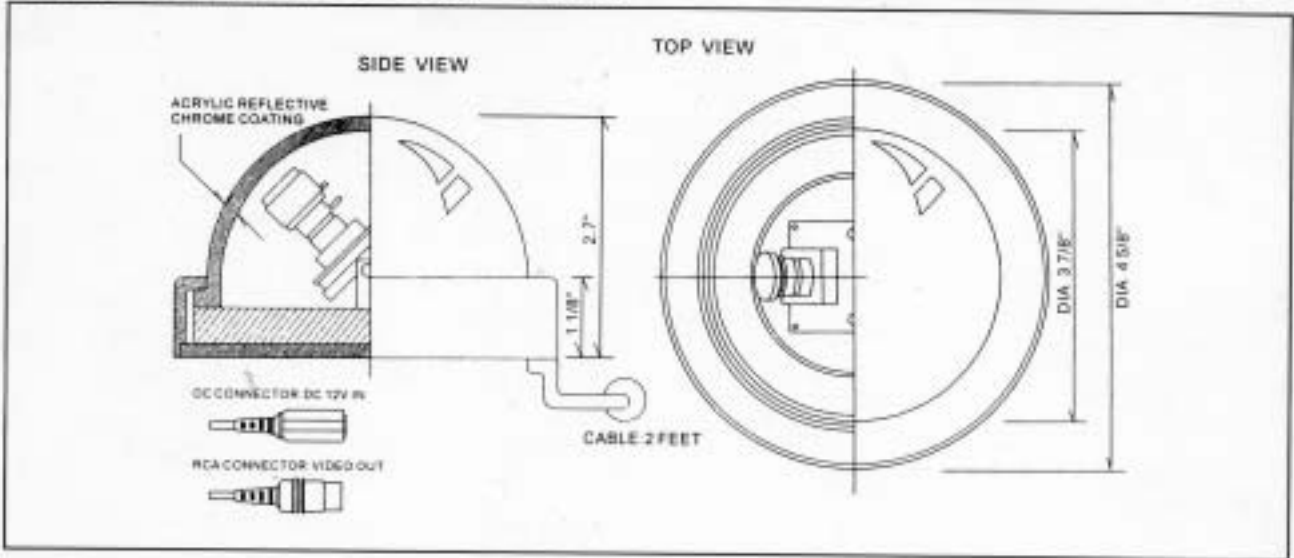

GENERAL FEATURES

- COLOR CCD 1/4" FORMAT
- LOW POWER CONSUMPTION
- REQUIRES 0.92 LUX FOR LOW LIGHT APPLICATIONS
- BUILT IN ELECTRONIC AUTO IRIS
- HIGH RESOLUTION
- INTERNAL SYNCHRONIZATION
- VARIFOCAL LENS 4mm- 9mm

SPECIFICATIONS

MODEL NO	CVC-6405DC
IMAGE SENSOR	INTERLINE TRANSFER CCD 1/4" FORMAT
EFFECTIVE PIXEL	512(H) x 492(V) PIXELS/NTSC 512(H) x 582(V) PIXELS/PAL
SCANNING SYSTEM	2:1 INTERLACED
SYNC SYSTEM	INTERNAL SYNC
SYNC PULSE	15.734KHz ± 1% (H) / 15.625KHz ± 1% (H) 59.94KHz ± 1% (V) / 50KHz ± 1% (V)
RESOLUTION	420 TV LINE(H)
MINI ILLUMINATION	0.92 Lux F1.2
S/N RATIO	MORE THAN 48dB
WHITE BALANCE	AUTO WHITE BALANCE
VIDEO OUTPUT	COMPOSITE VIDEO SIGNAL: 1.0Vp-p 75 ohm
ELECTRONIC SHUTTER TIME	NTSC=1/60- 1/100,000 Sec PAL =1/50-1/100,000 Sec
POWER SUPPLY	12 VOLTS DC-CENTER PIN POSITIVE
POWER CONSUMPTION	160mA(TYP)
LENS	VARIFOCAL LENS 4mm- 9mm
OPERATIONAL TEMP.	-50 — 122° F
STORAGE TEMP.	-68 — 144° F
DIMENSION	2.7" (H) x 4 5/8" (W) x 4 5/8" (D)
WEIGHT	7.4 oz (210grams)

Specifications subject to change

Speco Technologies-ProVideo

200 NEW HIGHWAY

AMITYVILLE, N Y 11701

1-800-645-5516 1-631-957-8700

Always use discretion when installing video and/or audio surveillance equipment especially when there is perceived privacy. Inquire regarding federal, state and/or local regulations applicable to the lawful installation of video and/or audio recording or surveillance. Party consent may be required.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>