


HTINTB8	2.8-12mm auto iris varifocal lens dark grey housing
HTINTB9	5-50mm auto iris varifocal lens dark grey housing
HTINTB10	9-22mm auto iris varifocal lens dark grey housing
HTINTB8W	2.8-12mm auto iris varifocal lens white housing
HTINTB9W	5-50mm auto iris varifocal lens white housing
HTINTB10W	9-22mm auto iris varifocal lens white housing

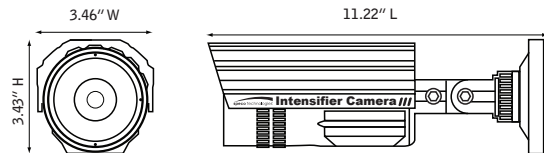

Features

- 650 lines of color resolution
- Amplify existing light with no distance limitations
- No problems caused by objects that reflect or absorb IR light sources
- Minimum illumination 0.00002 lux (Intensifier™ @ 512x)
- Dual voltage 12VDC & 24VAC operation
- Full OSD operation
- Wall or ceiling mount
- External controls for zoom & focus
- S/N Ratio more than 52dB (weight on)
- Weather resistant operation
- EZ mount system simplifies installation
- 5 year warranty

Now with Presets:
Outdoor, Indoor, Elevator,
Lobby, Hallway & Dark

Specifications

Image Pick-Up Device	1/3" Sony Super HAD II™ CCD
TV System	NTSC, PAL
Total Pixels	811(H) * 508(V)
Effective Pixels	768(H) * 494(V)
Scanning Frequency	15.734KHz(H) & 59.94Hz(V)
Scanning System	2:1 Interlace
Synchronization	Internal
Resolution	650 TV Lines
Minimum Illumination	CDS OFF: 0.15 Lux CDS ON: 0.00002 Lux
S/N Ratio	More than 52dB
Video Output	CVBS: 1.0Vp-p / 75Ω
Electronic Shutter Speed	1/60 sec ~ 1/120,000 sec
OSD	Available
WDR	On / Off (Level adjustable)
BLC	BLC / HLC / OFF
Day & Night	Color / BW / AUTO
Gain Control	Low / High / Off
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,700°K ~ 11,000°K)
Intensify	Auto / Off (Selectable x2 ~ x512)
Motion Detection	On / Off (8 Programmable Zones)
Privacy Masking	On / Off (12 Programmable Zones)

SPECO DNR	On / Off (Level adjustable)
Digital Zoom	On / Off (x1 ~ x16)
DIS (Digital Image Stabilization)	On / Off
Sharpness	On / Off (Level adjustable)
Flip / Mirror	On / Off
Power Supply	DC 12V / AC24V(Dual Voltage)
Power Consumption	DC 12V 250mA / AC24V 100mA
Operational Temp.	14° F - 122° F
Storage Temp.	-4° F - 140° F
Dimension	3.46"(W) * 3.43"(H) * 11.22"(L)
Weight	3 lbs

Optional Mounting Accessories



Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 7/8/11

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>