

# SCOUT® MANUFACTURED HOUSING



## Standard-Vent and Direct-Vent Gas Water Heaters



**Complies with HUD Standards for Manufactured Housing Installation. Design-Certified by CSA International -**

Also complies with National Appliance Energy Conservation Act (NAECA) energy-efficiency standards effective January 20, 2004.

**Gas Control Is Convertible for Natural and Propane Gas -**

For flexibility to meet the varying needs of Manufactured Housing installations.

**Side-Mounted 3/4" Cold Water Inlet -** For ease of installation when cold water supply originates below the structure. Top-mounted 3/4" hot water outlet.

**Direct-Vent Models Packaged with Bottom Intake Air Vent -**

To draw all combustion make-up air from outside the structure.

**Optional Ducted Air Inlet Kit for Direct-Vent Models -** For use when water heater is installed over a basement. Provision for horizontal air inlet ducting up to 30 feet, using Schedule 40 PVC pipe. Kit includes 45° rodent-proof termination cap and wall collars. Kit #9002986 for 30 and 40 gallon models. Kit #9002987 for 50-gallon models.

**Approved Roof Jack Kits Required for Installation of Direct-Vent Models -**

Four kits available to accommodate vertical vent distances from 12" to 96" (see back of sheet).

**Green Choice™ Eco-Friendly Gas Burner -** Patented design reduces NO<sub>x</sub> emissions by up to 33% and complies with Southern California and Texas requirements.

**Glass-Lined Tank -** For long-lasting protection against rust and corrosion.

**Anode Rod -** Helps protect against rust and corrosion for long life.

**Factory-Installed Temperature & Pressure (T&P) Relief Valve**

**Maximum Hydrostatic Working Pressure 150 PSI**

**1-Year or 6-Year Limited Tank Warranty**

For more information on Scout® contact:  
State Water Heaters  
500 Tennessee Waltz Parkway, Ashland City, TN 37015  
800-365-0024 Toll-free  
[www.statewaterheaters.com](http://www.statewaterheaters.com)

**SOLID.STATE.**




# SCOUT<sup>®</sup> MANUFACTURED HOUSING



## Standard-Vent and Direct-Vent Gas Water Heaters

MODEL NUMBER	PEAK DEMAND OUTPUT (1st Hour Rating Gallons)	ENERGY FACTOR	GAL. CAP.	BTU INPUT PER HOUR NATURAL/PROPANE	RECOVERY 90°F RISE GALLONS	R VALUE	DIMENSIONS IN INCHES						APPROX. SHIPPING WEIGHT (LBS.)	
							A	B	C	D	E	F		DRAFT HOOD OUTLET
<b>STANDARD-VENT MODELS – See Figure 1</b>														
SCI 30 YOMT	69	0.61	30	35,000/32,000	36	8	61-3/4	57-1/4	16	13-1/4	17-3/4	51-1/2	3-4	115
SCI 40 YOMT	66	0.59	40	35,500/35,500	37	8	59-1/4	54-3/4	18-1/2	13-1/4	17-3/4	48-1/2	3-4	134
SCI 50 YOMT	88	0.58	50	40,000/37,000	41	8	61-1/2	57	20	13-1/4	TOP	50	3-4	168

Recoveries are rounded to nearest gallon.

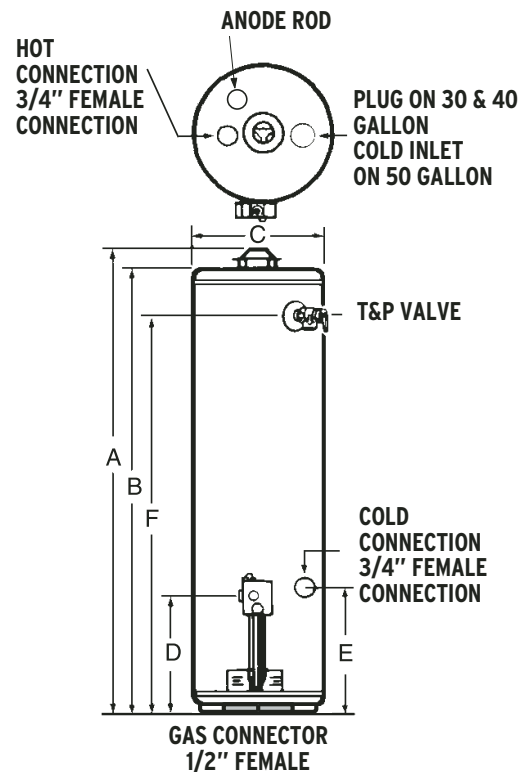

Standard-Vent Models (Figure 1)

For complete information on limited warranties, consult written warranty, or contact the State Customer Care Center, 1-800-365-0024.

State Industries, Inc. reserves the right to make product changes or improvements without prior notice.

For more information on Scout® contact:  
 State Water Heaters  
 500 Tennessee Waltz Parkway, Ashland City, TN 37015  
 800-365-0024 Toll-free  
 www.statewaterheaters.com

**SOLID. STATE.**



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>