

VANDAL-PROOF IR CAMERA




CDR-1204



Features

- 1/3" Sony Color CCD
- Minimum Illumination: 0.5Lux/F1.2 (LED OFF); 0Lux (LED ON)
- Automatically switch to B/W mode under low light when illumination under 3-5Lux
- Max. 57' working distance with IR-LED On
- Designed as Waterproof Structure
- Against-Dismantle Function
- Vandal Proof Dome Cameras are extensively used in Prisons, Courthouses, Public Places, Banks, and ATMs, among others

Dimensions

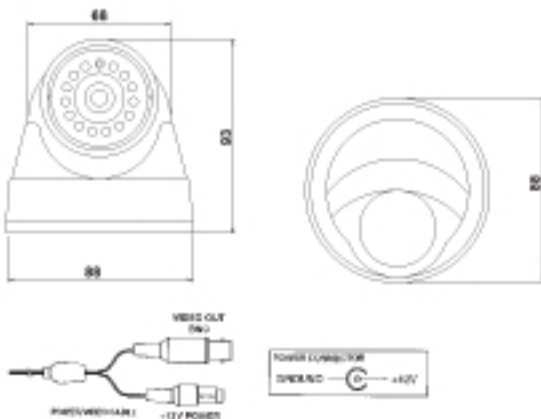

Specifications

Model	CDR-1204
Image Sensor	1/3" SONY Super HAD CCD
Signal system	PAL or NTSC Color system
Effective Pixels	PAL: 752(H) x 582(V) NTSC: 768(H) x 494(V)
Resolution	420 TV Lines
Minimum Illumination	0.1Lux/F2.0 (LED OFF) ; 0Lux (LED ON)
Day/Night Automatically Switch	Illumination < 3-5 Lux/F1.2
S/N Ratio	More than 52dB
Electronic Shutter	1/50-1/100,000sec(PAL) 1/60-1/100,000sec(NTSC)
White Balance	Automatic
AGC	Automatic
BLC	On/Off
Gamma Correction	0.45
Sync mode	INT
Lens	8mm
IR-LED	24pcs LED : 850nm
Illumination distance	57'
Video Output	1.0Vp-p, 75Ohm, sync negative polarity
Power Supply	DC 12V ± 10%
Operating Temperature	-10°C ~ +50°C RH95% MAX
Body	Aluminum
Weight	1.2 lbs



SVA Group USA Inc.
1316 John Reed Court, City of Industry, CA 91745
Tel: 626-363-9500 | Fax: 626-363-9508
1-888-8-ASK-SVA
<http://www.sva-usa.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>