

# Thermal Print Heads

## For Barcode and Label Printers

### BHP4502SS

#### FEATURES

- Normal type with no heat history control type [SS type]
- New-BP protective layer with excellent abrasion resistance is used.

#### APPLICATIONS

- Barcode and label printers
- Bank ATMs
- Amusements
- Ticket-vending machines
- POS terminals

#### PRODUCT SPECIFICATIONS


##### HEATING ELEMENT SPECIFICATIONS

Number of heating elements	(dots)	1024
Dot density	(dots/mm)	8
	(DPI)	203
Length of heating element array (effective)	(mm)	128
Heating element average resistance	( $\Omega$ )	800
Glaze type		Partial glaze

##### DRIVE CONDITIONS

Applied platen diameter	(mm)	$\phi 20$ max.
Paper-feed speed	(mm/sec)	100max.
Data transfer frequency	(MHz)	5max.
Driver power supply	(V)	4.75 to 5.25

#### SHAPES AND DIMENSIONS

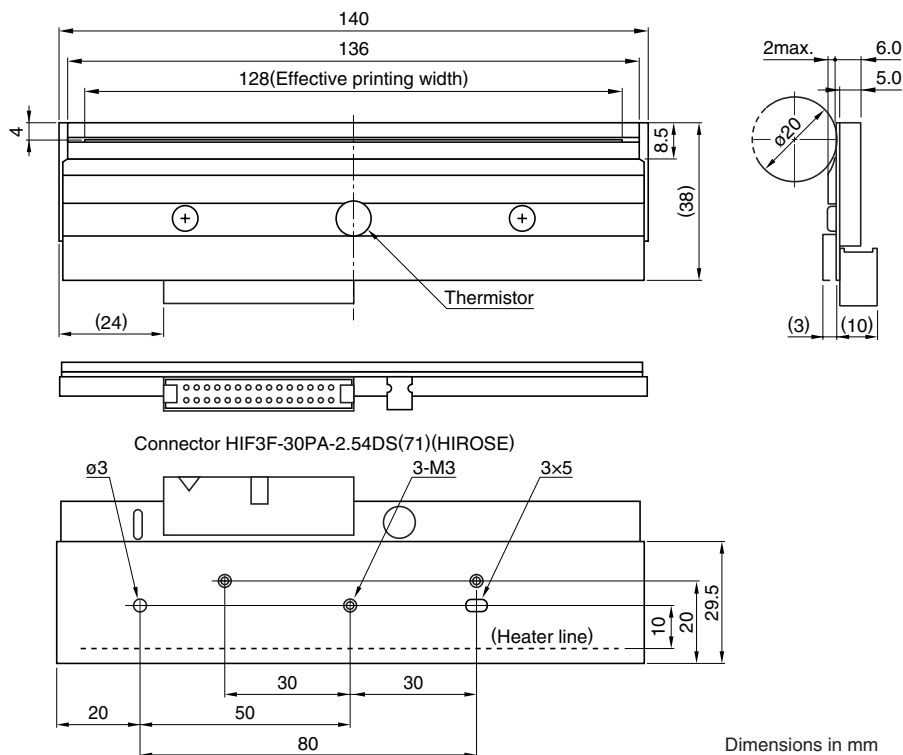

Dimensions in mm

• All specifications are subject to change without notice.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>