



SM40G Super Marathon Gas Fryer

Project _____
 Item _____
 Quantity _____
 CSI Section 11400 _____
 Approval _____
 Date _____

SM40G Super Marathon Gas Fryer

Models

- SM40G



SM40G
Shown with optional casters.

Standard Features

- 35-43 lb. (17-21 liter) frypot oil capacity
- 105,000 Btu/hr input
- Millivolt pilot system - requires no electrical hookup
- Stainless steel frypot, front and door, enamel sides
- Stainless steel over-the-flue basket hanger and two fry baskets 5.62" x 5.62" x 13.25" (14 x 14 x 34 cm) insulated handles
- Wide cold zone
- 3/4" NPT gas connection on single units
- 6" (15 cm) adjustable steel legs

Options & Accessories

- Stainless steel sides
- Oil filtration system - Super Cascade (UFF) or Cascade (SUFF)
- Matching cabinet and dump station available.
- Casters

Specifications

Designed for general purpose usage

Combine efficiency with capacity in this all-purpose affordable fryer.

Make the most of your energy dollars with Dean's exclusive Thermo-Tube design. The three heating tubes are surrounded by oil and heat absorption is maximized with controlled flow tube baffles. The energy is forced into the oil, with less going unused up the vent. The benefits are quick heat-up time, low idle cost and low gas consumption per load of product cooked.

The SM40G uses only 35-43 lbs. (17-21 L) of oil for optimum cooking efficiency. Plus, Dean's wide cold zone design minimizes oil deterioration by trapping debris under the cooking area, preventing carbonization of particles and oil contamination. Sloped bottom with 1.25" (3.175 cm) drain valve makes cleaning fast and easy.

Assure rapid recovery with Dean's accurate mechanical thermostat and 105,000 Btu/hr (26,481 kcal) (30.8 kW) of input power which eliminates time lost in waiting between loads and requires no electrical hookup.

Build on Dean's versatility by combining two or more units into a battery. Add optional filtration for safe and fast oil filtering.

Dean's fryers achieve long and dependable life through simplicity of design -- durable stainless steel baffles and rugged cast iron burners keep maintenance to a minimum.



5489 Campus Drive
Shreveport, LA 71129 USA

Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@dean.enodis.com


<http://dean.enodis.com>
Bulletin No. 830-0059 1/08
Litho in U.S.A. ©Frymaster, LLC

Enodis®



SM40G Super Marathon Gas Fryer

Model # _____
CSI Section 11400

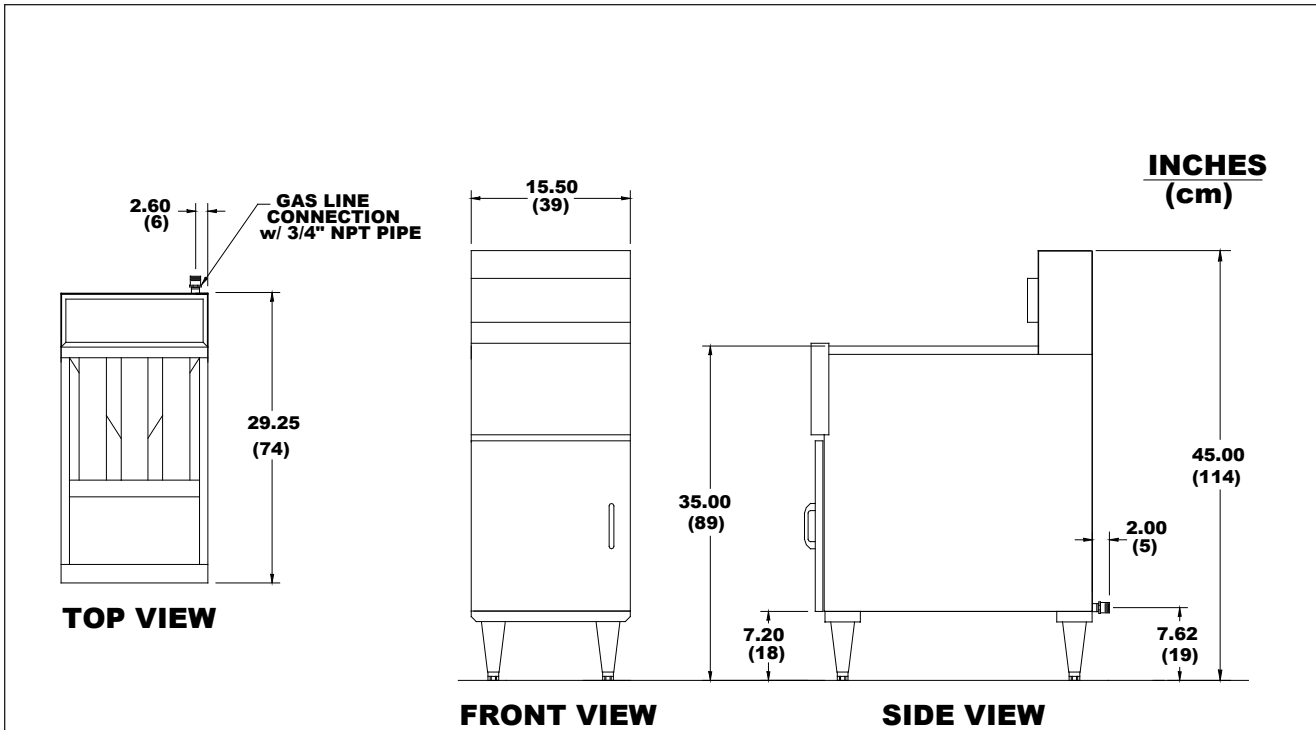

DIMENSIONS

MIN./MAX. OIL CAPACITY	OVERALL SIZE (cm)				DRAIN VALVE (cm)	DRAIN VALVE HEIGHT (cm)	NO. OF TUBES	FRYING AREA (cm)	CLASS	SHIPPING lbs./cu.ft. (kg/m³)
	WIDTH	DEPTH	OVERALL HEIGHT	WORK HEIGHT						
35-43 lbs. (17-21 L)	15.50" (39)	29.25" (74)	45" (114)	35" (89)	1.25" (3.175)	17.5" (44)	3	14 x 14" (35 x 36)	85	180 lbs./15 (82/0,42)

POWER REQUIREMENTS

NATURAL OR LP GAS INPUT RATING	GAS CONNECTION	ELECTRICAL REQUIREMENT
105,000 BTU/hr. (26,481 kCal/hr.) (30.8 kW)	3/4" N.P.T. regulator not required	NONE

SHORT TERM SPECIFICATION

Shall be DEAN free-standing cool zone deep fat fryer, Model SM40G. Only 15.50" (39 cm) wide, 35-43# (17-21 L) oil capacity, requiring 105,000 BTU (26,481kcal) (30.8 kW) natural or LP gas input (3/4" N.P.T. connection) and mechanical controls.

ORDERING DATA

Please specify:
Natural or propane gas
Altitude -- if above 1,999 ft. (609 m)

NOTE:
DO NOT CURB MOUNT.

5489 Campus Drive
Shreveport, LA 71129 USA

Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@dean.enodis.com

<http://dean.enodis.com>
Bulletin No. 830-0059 1/08
Litho in U.S.A. ©Frymaster, LLC

Enodis

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>