

VXI LIMITED WARRANTY

1. If your VXI headset fails to work for any reason during the first two years from the date of purchase as shown by the purchaser's warranty registration, VXI will repair or replace the headset at its election, free of charge. To register your VXI product, you may do so online at www.vxicorp.com or by calling customer service at 800-742-8588. Without warranty registration, the warranty period begins on the date of manufacture. All products returned to VXI after the two-year warranty period will be repaired as "out of warranty" products, and purchaser will be billed for such repairs pursuant to the Out-of-Warranty Repair provisions set forth below.

2. The obligations of VXI under this warranty shall be limited to repair or replacement (at our option) of any part returned, freight pre-paid, to VXI. Returned products require a Return Authorization that may be requested from VXI at 800.742.8588 or www.vxicorp.com.

3. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not permit the exclusion of implied warranties and the foregoing exclusions may not apply to you.

4. In no event shall VXI be responsible for any other damages whatsoever including direct, indirect, special, incidental, consequential or otherwise for breach of this or any other warranty, express or implied.

OUT-OF-WARRANTY REPAIRS

VXI will repair out-of-warranty product for a charge that is applicable as of the date of receipt by VXI. Call 1-800-742-8588 for current repair charges and see return details above. Out-of-warranty repairs are warranted to be free from defects in material and workmanship for ninety (90) days. Products returned to VXI for Out-of-Warranty repairs, freight prepaid and with proper Return Authorization, will be return shipped to the customer at VXI's expense within five (5) days of VXI's receipt of payment.



VXI CORPORATION
One Front Street, Rollinsford, NH 03869
603-742-2888 / 800-742-8588
www.vxicorp.com

PASSPORT 37 SERIES CONVERTIBLE HEADSET

USER GUIDE

Two-wearing styles:
Over-the-ear or over-the-head.



The Passport 37 headset is available in three versions for compatibility with VXI (Passport V-series), Plantronics (Passport P-series), or GN Netcom (Passport G-series) quick disconnects. Please follow directions below for your choice of wearing style.

WEARING OVER-THE-EAR

1. Swing the round receiver downward (1).
2. Choose left or right ear for placement.
3. Place curved earpiece over the top of your ear and slide behind the ear. Gently center the receiver on your ear (2).
4. Position microphone a finger's width away from your lower lip. The microphone housing will have either the word TALK *or* a painted dot imprinted on it. This mark must face your mouth.
5. Secure the clothing clip to keep headset stable.





ATTACHING THE HEADBAND

1. Choose left or right ear for placement. To wear headset on your right ear, follow directions A.


A. ASSEMBLY FOR RIGHT EAR PLACEMENT

- Position receiver (3) so it is almost touching the curved part of the headset.
- Locate the tiny screw (4) on one side of the earpiece.
- Hold the over-the-ear headset in your hand with the screw facing you.
- Place receiver on top of the headband's receiver housing (5). Be sure to align the screw between the "cut-out" section on the right side of the housing (6). Place your thumb on the receiver and press it downward into place. Be sure that the receiver rests firmly under the two latches (7a & 7b).



B. ASSEMBLY FOR LEFT EAR PLACEMENT


- Position receiver (8) so it is almost touching the curved part of the headset.
- Locate the small circle (9) on one side of the earpiece.
- Hold the over-the-ear headset in your hand with the small circle facing you.
- Place receiver on top of the headband's receiver housing (10). Be sure to align the small circle between the "cut-out" section on the left side of the housing (11). Place your thumb on the receiver and press it downward into place. Be sure that the receiver rests firmly under the two latches (12a & 12b).



2. Adjust the metal headband either in or out for best fit.
3. Place headband over your head with cushion against your ear.
4. Position microphone a finger's width away from your lower lip. The microphone housing will have either the word TALK *or* a painted dot imprinted on it. This mark must face your mouth.
5. Use clothing clip to keep headset stable.

REMOVING THE RECEIVER FROM THE HOUSING

1. Hold the unit in one hand.
2. With your other hand, gently lift receiver out of the housing as shown (13).

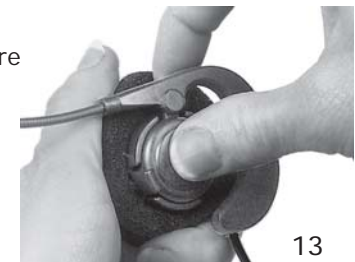

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>