

## MODEL VHMD15

### HUMIDI-HEAT HUMIDIFIED HOLDING SYSTEM



Model VHMD15



#### STANDARD FEATURES:

- Electronic Heating controls 80°F - 200° holding temperature range
- On-Demand Computer-chip controlled Humidity Levels
- Built-in Humidity System with self contained 1 gallon water reservoir
- Capacity of 15-each 18" x 26" sheet or 30-each 12" x 20" x 2.5" hotel pans
- Heavy duty polished non-corrosive series stainless steel construction 20 gauge exterior and interior
- Welded tubular steel frame
- Fully insulated, 2" in top, 1" in sides and bottom
- Heavy duty 5" casters
- Universal Tray Slides
- 120 Volt 1200 Watt 10 Amp
- Recessed Handles
- Dutch Doors
- Top mount cord and wrap
- Heavy duty positive seal door latching system
- Left or right hand hinging (no charge)

#### OPTIONS:


- 208/240 volt
- Transport Package
- Full Perimeter Bumper
- 6" heavy duty casters
- Glass Door (Dutch Doors)
- Security package

#### SPECIFICATIONS:


Vulcan VHMD15 Humidified Holding Cabinet; Electronic controlled Heating and Holding with an On-Demand Humidity System. Thermostat ranges from 80° F- 200° F. Electronic Humidistat provides humidity to chamber at selected level. Can be used in Holding or Proofing. Chamber capacity is 15 each 18" x 26" sheet pans or 30 each 12" x 20" x 2.5" hotel pans. Exterior and interior is constructed of 20 gauge non-corrosive stainless steel. Welded tubular steel interior frame. Fully insulated. 120v, 1200 w, 10 amp service 5" heavy duty casters (2 swivel with brakes, 2 rigid). Heavy duty Magnetic latch.

Classified by UL to NSF std. #4

UL Listed. UL Listed to Canadian Safety standards.

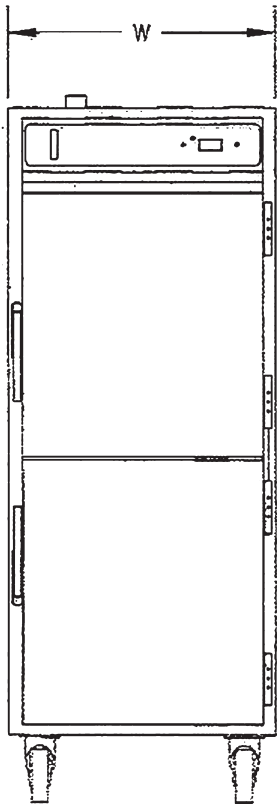

FRONT VIEW

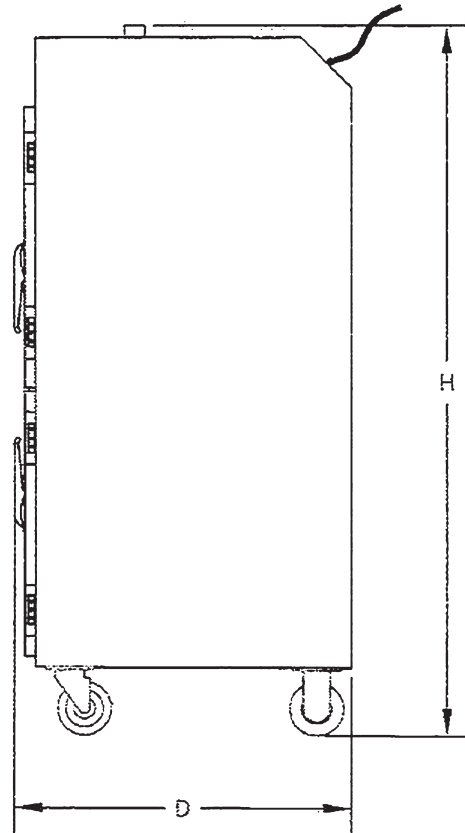

SIDE VIEW

| Model No. | 18 x 26 Capacity | 12x20x2.5 Capacity | High          | Deep          | Wide          | Shipping Weight | Volts | Watts | Amps |
|-----------|------------------|--------------------|---------------|---------------|---------------|-----------------|-------|-------|------|
| VHMD15    | 15               | 30                 | 65"<br>1702mm | 34¼"<br>857mm | 25⅞"<br>724mm | 370#<br>167 kg  | 120   | 1200  | 10   |

**NOTE:** In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

VULCAN-HART COMPANY, P.O. BOX 696, LOUISVILLE, KY 40201, TEL. 1-800-814-2028

502-778-2791, QUOTE & ORDER FAX: 1-800-444-0602

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>