~		
		~
AN	NJINAINU	MINI ROOF MO
INIM-AIS		apina involuence Magnet Mount Anter
		oiheg atillate2
»»»EIL		
Specs::		TERK
Frequency:	2320 to 2332.5 MHz	For more information, visit www.terk.com,
Cable Length:	21 feet	For technical support, call 1.800.942.TERK (8375) For more information about SIRIUS Satellite Radio service,
Terrestrial Gain:	-4 dBiVp, 1°elevation	visit, www.siriusradio.com
	+2 dBic, 20°elevation	Made in China One year limited warranty
Satellite Gain:		
Satellite Gain:	3 dBic, 25 - 45°elevation	The SIRIUS name and related logos are trademarks of
Satellite Gain:	4.5 dBic, 50 – 85° elevation	SIRIUS Satellite Radio Inc.
	4.5 dBic, 50 – 85°elevation 4.0 dBic, 90°elevation	
Gain:	4.5 dBic, 50 – 85°elevation 4.0 dBic, 90°elevation 34.5 dB Typical	SIRIUS Satellite Radio Inc.
Gain: Operating Tempe	4.5 dBic, 50 – 85° elevation 4.0 dBic, 90° elevation 34.5 dB Typical rature: -40° F to 185° F	SIRIUS Satellite Radio Inc. TERK and TERK Technologies are trademarks of TERK Technologies Corp. Commack, NY
Gain:	4.5 dBic, 50 – 85° elevation 4.0 dBic, 90° elevation 34.5 dB Typical rature: -40° F to 185° F	SIRIUS Satellite Radio Inc. TERK and TERK Technologies are trademarks of TERK Technologies Corp. Commack, NY
Gain: Operating Tempe SIRIUS approved: Installation ins	4.5 dBic, 50 – 85° elevation 4.0 dBic, 90° elevation 34.5 dB Typical rature: -40° F to 185° F	SIRIUS Satellite Radio Inc. TERK and TERK Technologies are trademarks of TERK Technologies Corp. Commack, NY


Pre Installation::

- The antenna has a magnetic base and must be installed on a conductive metal surface on the outside of the vehicle.
- Position the antenna in such a way that it will be free of mechanical (i.e. an outward-opening moon roof) and line-of-sight obstructions such as roof racks, luggage boxes, etc. In these instances, consider positioning the antenna offset from the vehicle centerline.
- Recommended installation locations are the roof of the vehicle above the rear window or on the top of the trunk near the rear window. (as shown in Fig.1)

Installation Instructions::

- **1** Make sure the installation location is clean and dry.
- 2 To install the antenna tail, place it against the antenna and route cable into the cable channel. Take the tail adhesive and remove the backing from one side. Place firmly onto the back of the tail over the routed cable. Then, remove the backing from the other side of the adhesive.
- **3** Place the SIR-Mini with tail on your roof or trunk in the predetermined antenna location (as shown in Fig.1) and press down firmly to secure antenna tail.

Limited Warranty TERK Technologies Corp. [TERK] warrants this product against defects in materials or workmanship for one [1] year from the date of purchase. During this warranty period, this product will be replaced without charge. This warranty does not cover any damage due to acts of nature, commercial use, accident, misuse, abuse or negligence. This warranty is only valid in the USA. Replacement as provided under this warranty is the exclusive remedy of the consumer. TERK shall not be liable for any incidental or consequential damages for breach of any express or implied warranty on this product, except to the extent that limitations of this sort are prohibited by applicable law. THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURCHASE EXCEPT TO THE EXTENT THAT IMPLIED WARRANTIES OF EITHER SORT ARE REOURED BY APPLICABLE LAW, AND IN SUCH CASE, EACH WARRANTY IS LIMITED IN DURATION TO ONE YEAR.

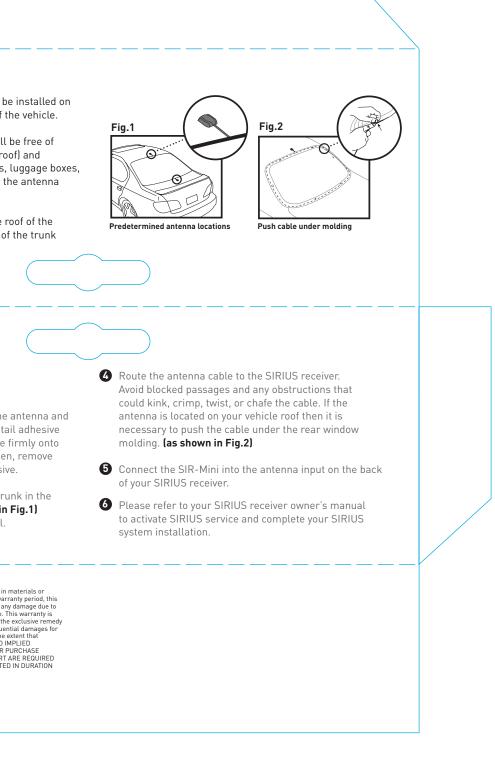

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com