

LF-RFB

Add-on Transmitter Owner's Manual

TERK

Universal Remote
Control Range
Extender



Transmitter Installation:

The battery holder has the two button cell 1.5V (#393) batteries already installed inside. (See Figure 1) Install the battery holder into the AAA transmitter module making sure that the positive (+) side of the holder aligns with the positive (+) end of the AAA transmitter module. Open the battery compartment of your remote control and replace one of the AAA batteries in your remote control with the AAA transmitter module. If your remote control uses AA batteries install the AAA transmitter module into the AA battery sleeve and replace one of the existing AA batteries with the AA sleeve with transmitter module installed inside. It is recommended that whenever you install this device in your AAA or AA battery remote control you check and/or replace the other AAA or AA battery with a new AAA or AA heavy-duty alkaline or lithium battery to ensure the strongest signals and optimal performance of both your remote and this transmitter device.


Replace the battery cover on your remote control. Your remote control is now ready for RF transmitting.

WARNING: This battery transmitter cannot be used with any device other than an infrared remote control. DO NOT put the AAA transmitter module and button batteries in any type of battery charger as it will permanently damage the unit and void the limited warranty.

Replacing Batteries:

Always replace with two (2) new #393 or equivalent silver oxide button batteries only. Replacing just one button battery and not both may not allow the transmitter sufficient fresh power to function properly.

Remove the battery holder from the AAA transmitter module. Next, carefully use a pointed object such as a paper clip end to gently push the button batteries out through the holes on the outside of the battery holder and replace with two (2) new #393 button batteries. Make sure the button batteries are installed with the positive (+) ends facing as shown in Figure 1. Install battery holder back into the transmitter module as described above. Some equivalent battery numbers for the 393 are SR754W, SR48, SR754, SB-B3, F, V393, D393, 255, 309, S754E, GP393, and AG5.

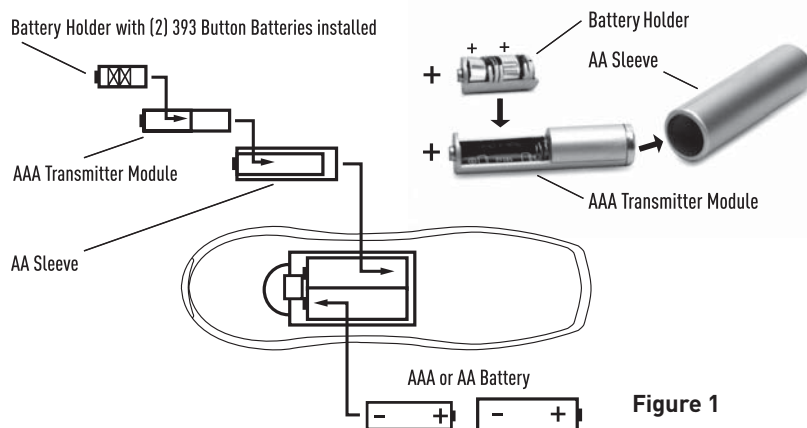

Limited one year warranty

Audiovox Corporation (Audiovox) warrants this product against defects in materials or workmanship for one (1) year from the date of purchase. During this period, this product will be replaced without charge. This warranty does not cover any damage due to acts of nature, commercial use, accident, misuse, abuse or negligence. This warranty is only valid in the USA. Replacement as provided under this warranty is the exclusive remedy of the consumer. Audiovox shall not be liable for any incidental or consequential damages for breach of any express or implied warranty on this product, except to the extent that limitations of this sort are prohibited by applicable law. THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURCHASE EXCEPT TO THE EXTENT THAT IMPLIED WARRANTIES OR EITHER SORT ARE REQUIRED BY APPLICABLE LAW, AND IN SUCH CASE, EACH WARRANTY IS LIMITED IN DURATION TO THE ONE YEAR.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>