

Job	Item

Mini Conveyor Toaster

TC13A3674, TC13A3663, TC13A3666

Standard Features:

- Stainless steel exterior construction
- 10" wide conveyor belt
- Automatic cool-down feature
- Energy-saving standby mode
- Air-cooled case construction
- Convection air dries product faster
- Large, easy-to-operate dial controls
- Separate upper and lower heat settings and conveyor belt speed
- High volume (250 slices per hour)
- Factory installed NEMA cord and plug
- Single-piece stainless steel crumb tray
- Damage resistant calrod heating elements
- All models toast bread, buns and bagels



For toasting a variety of breads, buns, rolls and bagels.

Application:

TC13 Mini Conveyor Toasters are designed to uniformly toast breads in large quantities, using continuous feed methods.

General Information:

- Chamber opening 1-1/2" (38.1mm)
- Chamber size:
 12-3/4" Long (323.85mm) x
 10-1/4" Wide (260.35mm)
- Requires approx. 14-1/4" of counter space
- Can be stacked two high

Product Loading:

 TC13 is equipped with a self-storing loading rack that is angled for feed the product into the toaster continuously.

Safety

Unique air flow design keeps case, top and sides cool. The unit is eqquiped with an auto cool down feature which allows the fan to cool the outer skin when the unit is turned off.

Construction:

Steel construction with a stainless steel finish is used for durability. Includes a stainless steel slide out crumb tray for easy clean-up.

Electrical:

Available in 120V, 208V or 240V, 1-phase only. Total rated input is 1.6KW (120V), 1.1KW (208V), or 1.5KW (240V). A factory installed 6 foot (1.8m) cord is included.

Heating:

When control is set to "ON", quartz infrared elements will turn on to toast both sides of bread. Lightness and darkness of the product is achieved by adjusting conveyor belt speed. Standby positive allow for energy savings durning non-peak peroids.

Controls:

Rotary 3-position dial selects ON/OFF/STANDBY positions. A conveyor speed dial controls the belt speed..

Accessories:

- Fiberglass return tray.
- Angled loading rack. (Supplied with TC13D3)
- Horizontal loading rack (optional)
- Stainless steel tray (optional) fits models as an exit tray.

Warranty:


Warranty includes one year parts and labor, on-site service. (USA only) Call factory for warranty authorization.

Options:


Stacking bracket

Mini Conveyor Toaster

TC13A3674, TC13A3663, TC13A3666

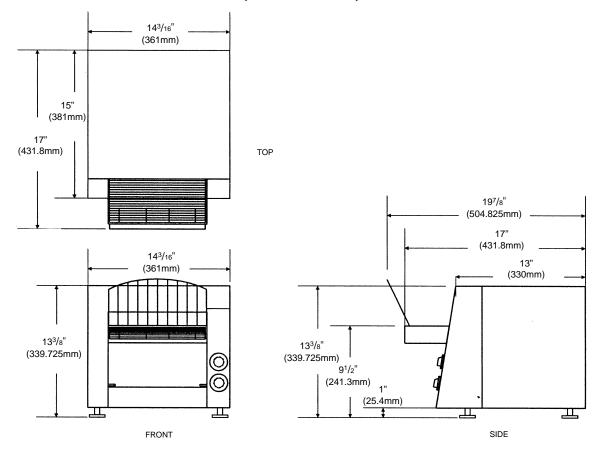

Model Number	TC13A3674	TC13A3663	TC13A3666
Product Delivery	Front return	Front return	Front return
Width	14-7/32"	14-7/32"	14-7/32"
Depth (w/cord clearance)	18-3/32"	18-3/32"	18-3/32"
Height w/1" Legs	13-3/8"	13-3/8"	13-3/8"
Toasting Chamber Dimensions	10-1/4" W x 1-1/2" H x 12-3/4" L	10-1/4" W x 1-1/2" H x 12-3/4" L	10-1/4" W x 1-1/2" H x 12-3/4" L
Loading Height	1-3/8"	1-3/8"	1-3/8"
Capacity (slices per hour)	250	250	250
Supply (1 phase)	120 V	208 V	240 V
Current draw	13.4 A	5.5 A	6.4 A
Rated heat input	1.6 KW	1.1 KW	1.5 KW
Factory Installed Cord & Plug	NEMA 5-20P	NEMA 6-20P	NEMA 6-20P
Shipping Weight	57 lbs.	57 lbs.	57 lbs.



INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.



Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com