Satellite® P25 Series

Feature Model(s):

Satellite P25-S509

P4 2800/17.0"Wide XGA/512MB/80GB/DVD-Multi/Mdm/LAN/Wi-Fi/WinXP Home

Satellite P25-S5091

P4 2800/17.0"Wide XGA/512MB/80GB/DVD-Multi/Mdm/LAN/Wi-Fi/WinXP Pro

Product Highlights

Performance

- Intel® Pentium® 4 processor with HT Technology
- 512MB of Main Memory
- 80GB* hard disk drive

Great Features

- 17.0" Wide XGA active matrix display
- NVIDIA® GeForce™ FX Go5200, 32MB DDR video memory
- DVD-Multi multi-function drive

Get On-Line

- Integrated V.92/56K modem
- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN

System Characteristics

CPU (See CPU Performance Disclaimer)**

Intel® Pentium® 4 processor at 2.80GHz **

L2 Cache

- 512KB Level 2 Cache integrated on die
- 800MHz Processor System Bus Clock Speed (PSB) / Hyper-Threading Technology support

Memory

- 512MB DDR SDRAM (Expandable to 2048MB) (Both slots may be occupied)
- Expansion memory: 128/256/512/1024MB, 2.5V, SODIMM, PC2100 DDR SDRAM
- Data/Address Bus Width; 64-bit/32-bit
- Intel® 865PE + ICH5 Chipset

Mass Storage/Optical Drive

- Primary Hard Disk Drive: 80GB* hard disk drive, 4200rpm, Enhanced IDE (ATA-5) Interface, 9.5mm height, 0.2lbs,, Service removable
- Main Module Bay DVD-Multi: ATAPI Interface; Maximum speed (READ): CD-R(24x), CD-RW(12x), CD-ROM(24x), DVD-ROM(8x), DVD-R(8x), DVD-RW(8x), DVD-RAM(2x); Maximum speed (WRITE): CD-R(16x), CD-RW(4x), DVD-R(2x), DVD-RW(1x), DVD-RAM(2x);

Compatibility: CD-ROM, CD-R (read/write), CD-RW (read/re-write), DVD-ROM. DVD-R (read/write), DVD-RW (read/write), DVD-RAM (read/write); 12.7mm height, user removable Optional accessories: DVD-ROM, DVD/CD-RW, DVD-R/RW, DVD Multi, FDD, 2nd HDD);

- 2nd Module Bay: Main Battery; (Optional Accessories: DVD-ROM, DVD/CDRW, DVD Multi, DVD-R/RW, weight saver)
- Software Decoder: InterVideo® (WinDVD™)

Graphics/Video

- 17.0" Wide XGA TFT active-matrix display****; internal display supports up to 16M colors at 1440 x 900
- NVIDIA® GeForce™ FX Go5200 graphics controller; 32MB DDR external video memory
- Direct X 9.0 support, OpenGL support
- External Color Support/Refresh Rate: (Depending on CRT)

800 x 600; 60/70/72/75/85/100/120Hz 60/70/72/75/85/100/120Hz 1024 x 768; 57/60/70/72/75/85/100/120Hz 1280 x 1024; 1440 x 900; 60/70/72/75/85/100Hz 1600 x 1200; 60/70/72/75/85/100Hz 60/70/72/75/85/100Hz 1680 x 1050; 1920 x 1200; 60Hz 1920 x 1440; 60Hz

60Hz

Input Devices

2048 x 1536;

Keyboard: Full sized 85 keys with 12 function keys, 2.7mm key

Part Numbers

PSP20U-1LKF3V

PSP20U-1LKF36

stroke, 6mm height; Dedicated Windows® & Application keys support; HotKey function; **TouchPad** pointing device.

- CD Control Function: Play/Pause, Stop/Eject, Previous,
 Skip/Neyt Mode Control switch (CD/DV/D/Digital Audia)
- Skip/Next, Mode Control switch (CD/DVD/Digital Audio)
- Toshiba Console button & Instant Access Internet button
- One Touch TV-out button

Expandability

- 2 memory slots (Both slots may be occupied)
- 2 PC Card slot supports 2 Type II and 1 Type III

Communications

- Integrated V.92/56K modem; Data and fax support
- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN

Due to FCC limitations, speeds of 53kbps are the maximum permissible transmission rates during Download. Actual data transmission speeds will vary depending on line conditions.

Ports

- RGB (monitor) port
- Parallel port
- 4 Universal Serial Bus ports (USB 2.0)
- 2 Infrared port (1 Consumer IR port Optional Toshiba Remote Control; 1 FIR port)
- TV-Out (S-Video)
- RJ-45 LAN port
- RJ-11 modem port
- I.Link (IEEE 1394) port
- Secure Digital® (SD) card slot

Physical Description

- Dimensions (LxWxH): 16.4" x 11.5" x 1.8"
- Weight: 9.9lbs

LED Indicators: Power, HDD, 2nd HDD (common with Module Bay device), DVD/CDRW, DC-IN, Caps Lock, Arrow, Numeric, Main Battery Charging Status, System Sleep/Suspend Status, SD Card, Wireless Communication (right side)

Sound

- Realtek ALC202 Codec Chip, Software Sound
- 16-bit stereo, Windows Sound System Ver. 2.0; SoundBlaster® Pro compatible (in DOS box only)
- Built-in harman/kardon Stereo Speakers
- Direct 3D Sound (supported by sound driver); Hardware acceleration for DirectSound and DirectMusic; Full Duplex and MIDI (play back) support
- Sound Volume (by Dial)
- Ports: External Microphone port, headphone port (stereo), Linein port

Power Supply

 AC Adapter: 120W AC Adapter, 100-240V / 50-60Hz frequency (Universal) input voltage, 19V x 6.3A Output.

Dimensions (LxWxH): 5.9" x 2.5" x 1.4" **Weight:** 1.38lbs

 Battery Pack: 12-cell, rechargeable, removable Lithium Ion (Graphite) battery; 14.8V x 6450mAh

Dimension (LxWxH): 5.9" x 5.1" x 0.9" Weight: 1.41lbs

- Battery Saver (in WindowsXP): Stand by, HDD Auto Off, Display Auto Off, Hibernation
- Battery Life: 2.0H ***

Recharge Time (Off/On): Main Battery—Up to 4Hrs/ Up to 12Hrs Battery life may vary depending on applications, power management settings and features utilized. Recharge time varies depending on usage. Battery may not charge while computer is consuming full power. After a period of time, the battery will lose its ability to perform at maximum capacity and will need to be replaced. This is normal for all batteries. To purchase a new battery pack or see information on accessories shipping with your

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P25-S509.doc Created on 9/22/2003 2:56 PM Rev. 1.1 Page 1 of 3

computer, visit the Toshiba website at accessories.toshiba.com.

Security

 Slot for computer lock, HDD and memory (2 screws), Built-in Modem (2 screws), Wireless LAN module (2 screws), Main Module Bay and 2nd Module Bay (both by sliding lock and sliding latch), User Power-on password, Setup Security, Keyboard Lock (by HotKey), Screen Blank (by Hotkey), Screen Saver (by software)

Bios

ACPI, PnP, VESA, DPMS, DDC, SM BIOS, PCI BIOS support

Operating System

- Microsoft® Windows XP Home pre-installed (P25-S509)
- Microsoft® Windows XP Pro pre-installed (P25-S5091)
- Microsoft® Windows 2000 component drivers on the web

Additional Software

- Microsoft® Works
- Drag'n Drop CD+DVD Software
- InterVideo® WinDVD Creator Plus
- Toshiba Notebook Maximizer
- Intuit® Quicken® New User Edition 2003
- Norton® AntiVirus™ 2003 w/3 Month Subscription
- AOL® (3 –Month offer)

AOL OFFER DETAILS: Availability may be limited, especially during peak times. TO AVOID BEING CHARGED A MONTHLY MEMBERSHIP FEE, SIMPLY CANCEL BEFORE THE THREE-MONTH PROMOTIONAL PERIOD ENDS. Premium services carry surcharges and communication surcharges may apply, including AK, even during promotional period. Members may incur telephone charges on their phone bill, depending on their location and calling plan, even during promotional period. Available to new AOL members in the United States, age 18 or older; a major credit card or checking account is required.

- Adobe® Acrobat Reader
- AT&T® Worldnet® Service 1 Month Free

Telephone access and other charges and other terms and conditions may apply. Offer available to new customers only. Offer expires 4/30/04.

- Microsoft Internet Explorer
- Toshiba Custom Utilities
- ConfigFree[™] Software
- Satellite Series Online Documentation

• <u>Toshiba Great Software Offer</u>: Receive your choice of two software titles. The software selection includes titles from the follow categories; productivity, education/reference, creativity and entertainment

Warranty

1 year parts, labor and battery

Environmental Specifications

- Temperature: Operating: 5° to 35°C (41° to 95°F); Non-operating: -20° to 65°C (-4° to 149°F)
- Thermal gradient: Operating: 15°C per hour maximum; Nonoperating: 20°C per hour maximum
- Relative Humidity: Operating: 20% to 80% non-condensing; Non-operating: 10% to 95% ono-condensing
- Altitude (relative to sea level): Operating: -60 to 3000 meters; Non-operating:-60 to 10,000 meters
- Shock: Operating: 10G; Non-operating: 60G
- Vibration: Operating: 0.5G; Non-operating: 1.0G

Product/Part Numbers

 Satellite P25-S509
 PSP20U-1LKF3V

 Satellite P25-S5091
 PSP20U-1LKF36

SelectServ® Warranty Programs

SWP-PEQQ3V Warranty Extension to 3 Years SWP-PEGQ3V 3 Year SystemGuard SWP-PEQX3V 3 Year Depot Express

SWP-PEGX3V 3 Year SystemGuard + Depot Express SWP-PEQN3V 3 Year Business On-Site Repair; Next Day Business Day Response

SWP-PEGN3V 3 Year SystemGuard + Business On Site Repair,

Next Business Day Response

Accessories

Selected Toshiba Accessories

PA3290U-1ACA Global AC Adapter (120W)
PA3291U-1BRS Primary Battery Pack (12 cell)
PA3109U-1FDD USB Floppy Disk Drive
PA3133U-1H40 2nd HDD 40GB

PA3304U-1ETC Toshiba Remote

PA3271U-1BTM Bluetooth SD Card II
PA3304U-1ETC Toshiba Remote Control

2nd HDD 60GB 2nd HDD 80GB

Modular Bay HDD Adapter

SD (Secure Digital) Memory

 SD-M3203B3
 32MB SD Card

 SD-M6403B3
 64MB SD Card

 SD-M1283B3
 128MB SD Card

 SD-M2564B3
 256MB SD Card

Kingston Memory

PA3204U-1H60

PA3230U-1H80 PA3292U-1ETC

KTT3614/128 Kingston 128MB Memory
KTT3614/256 Kingston 256MB Memory
KTT3614/512 Kingston 512MB Memory
KTT3614/1G Kingston 1GB Memory Module

Cases

PA1323U-1NCS Toshiba Roller/BackPack

(case only suitable for this notebook)

* Go to www.accessories.toshiba.com for additional, available accessories

** Central Processing Unit ("CPU") Performance Disclaimer:

CPU performance in your computer product may vary from specifications under the following conditions:

- · use of certain external peripheral products
- · use of battery power instead of AC power
- use of certain multimedia games or videos with special effects
- use of standard telephone lines or low speed network connections
- use of complex modeling software, such as high end computer aided design applications
- use of computer in areas with low air pressure (high altitude >1,000 meters or >3,280 feet above sea level)
- use of computer at temperatures outside the range of 5°C to 35°C (41°F to 95° F) or >25°C (77°F) at high altitude (all temperature references are approximate).

CPU performance may also vary from specifications due to design configuration.

Under some conditions, your computer product may automatically shutdown. This is a normal protective feature designed to reduce the risk of lost data or damage to the product when used outside recommended conditions. To avoid risk of lost data, always make back-up copies of data by periodically storing it on an external storage medium. For optimum performance, use your computer product only under recommended conditions. Read additional restrictions under "Environmental Conditions" in your product Resource Guide. Contact Toshiba Technical Service and Support for more information.

**** **TFT Display Disclaimer:** Small bright dots may appear on your TFT display when you turn on your PC. Your display contains an extremely large number of thin-filmtransistors (TFT) and is manufactured using high-precision technology. Any small bright dots that may appear on your display are an intrinsic characteristic of the TFT manufacturing technology.

Return Policy

TAIS does not accept the return of component parts, or bundled software, which have been removed from the PC system. Pro-rata refunds on individual PC components or bundled software, including the operating system, will not be granted. If you wish to return a complete PC system, contact the TAIS dealer where you purchased the product, and comply with the dealer's standard return policies and procedures.

^{*} GB = 1 Billion Bytes

*** Business Winstone® 2002 BatteryMark™ Version 1.0


These models achieved the battery life times shown using Ziff Davis Media Inc.'s Business Winstone® 2002 BatteryMark™ Version 1.0. These tests were performed without independent verification by the VeriTest testing division of Lionbridge Technologies, Inc. ("VeriTest"). Neither Ziff Davis Media Inc. nor VeriTest makes any representations or warranties as to the results of the tests. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. All products used in the tests were shipping versions available to the general public. The battery life results were achieved running the Business Winstone® 2002 BatteryMark™ Version 1.0 on the following system parameters. System parameters were set according to Ziff Davis Media Inc.'s recommendations.

"Business Winstone 2002 BatteryMark Version 1.0" Score


P42.8G(800MHz) w/HT,17"WXGA,256MB+256MB,60GB(4200rpm),DVD-R/-RW,1394/FIR,802.11b(Agere), No BT Antenna, NNVIDA(32MB), 12cell, harman/kardon, WinXP

	Battery Life	Catalog Spec (1st)	2.0H
		(1st+2nd)	-
		Number of Conditioning Phase	1
		Life Test Run	2
		·	
Α	CPU Name		Intel® Pentium®4 Processer
	Processor info	speed	2.8GHz
		number of processors	1
	amount of RAM		512MB
	Amount of seconda	ary RAM cache	512KB
		_	
В	Battery	type(1st)	Li-lon
			14.8Vx6450mAh(12cell)
		model number(1st)	PA3291U-1BAS/1BRS
		type(2nd)	-
			-
		model number(2nd)	-
		number of batteries	1st=1 , 2nd=0
	1		
С	Graphics amount and type of RAM		NVIDIA GeForce FX Go5200
			32MB
			DDR
	graphics driver name and version		nVIDIA Display Driver
	graphics resolution and color depth, refresh rate		17"Wide 1440x900/32bit/60Hz
	T		1 /
D	hard disk capacity		60GB (4200rpm)
	hard disk file system & transfer mode+C15		Enhanced IDE(ATA-5)
	hard disk controller model		Intel® 82801EBM
	size of hardware cache if any		-
	T		Mandaux VD D. ()
E	operating system version, service pack		Windows XP Professional Sevice Pack 1
	other special conditions		N/A

Front with display open

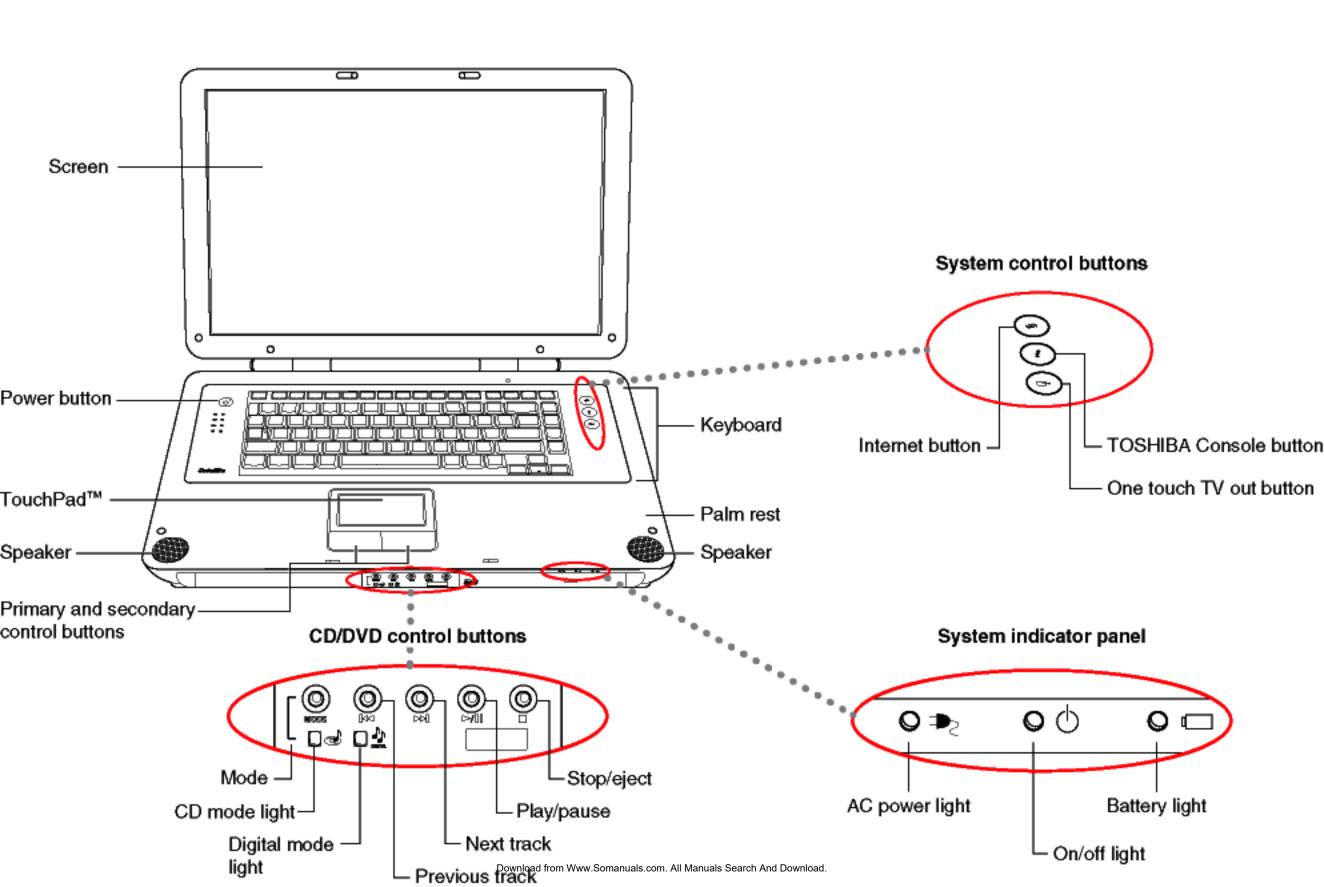


Front with display closed

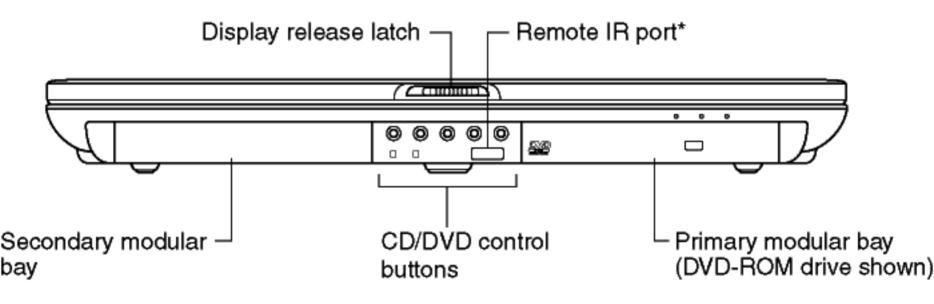


*Functional only on systems with Toshiba temote control.

Right side

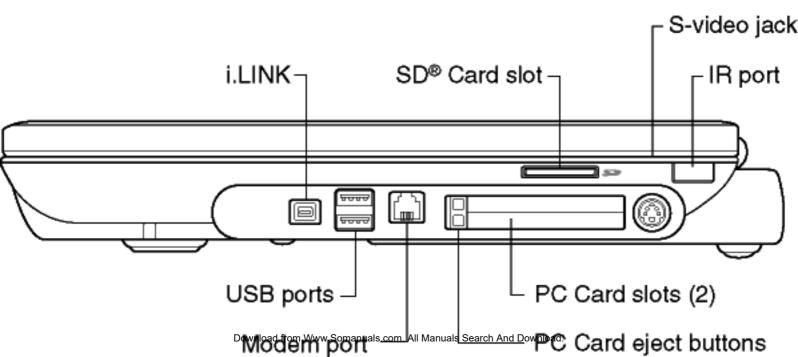


Left side

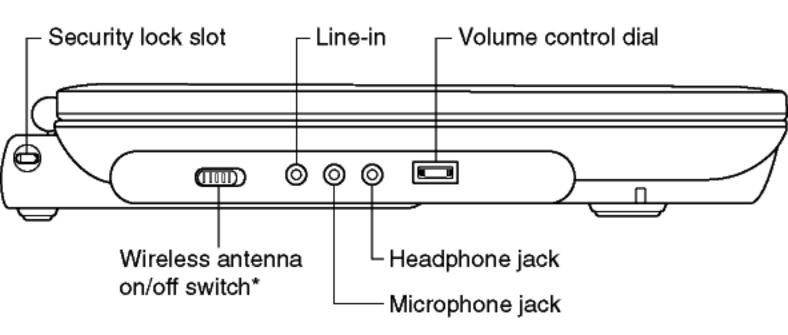


*Functional only on systems with wireless module installed.

Back

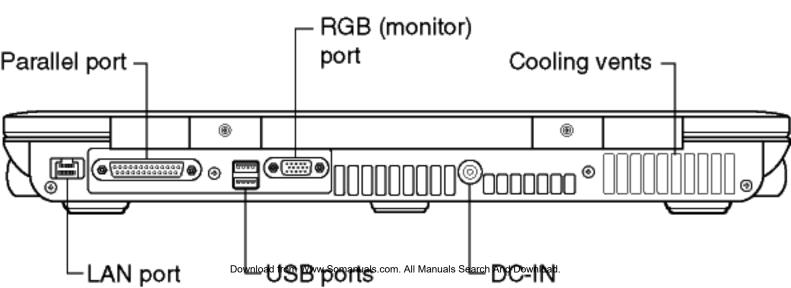

Underside

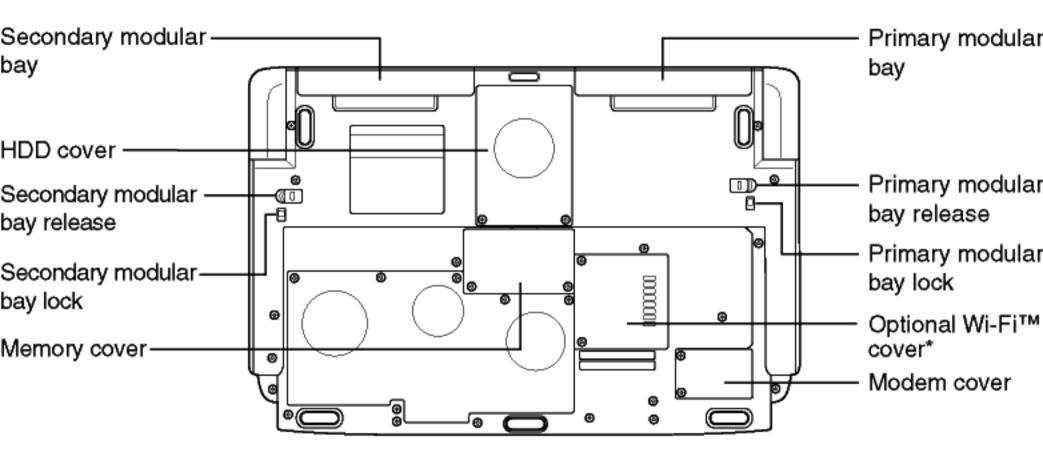

*Functional only on systems with wireless inodule installed.

Satellite® P25 Series

Feature Model(s):

Satellite P25-S609

P4 3000/17.0"Wide XGA/1024MB/80GB/DVD-Multi/Mdm/LAN/Wi-Fi/WinXP Media Center Edition

Part Number

PSP20U-19PS8R

Product Highlights

Performance

- Intel® Pentium® 4 processor with HT Technology
- 1024MB of Main Memory
- 80GB* hard disk drive

Great Features

- 17.0" Wide XGA active matrix display
- NVIDIA® GeForce™ FX Go5200, 64MB DDR video memory
- DVD-Multi multi-function drive

Get On-Line

- Integrated V.92/56K modem
- Integrated 10/100 Ethernet LAN
- Integrated 802.11a/g Wireless LAN

System Characteristics

CPU (See CPU Performance Disclaimer**)

• Intel® Pentium® 4 processor at 3.00GHz **

L2 Cache

- 512KB Level 2 Cache integrated on die
- 800MHz Processor System Bus Clock Speed (PSB) / Hyper-Threading Technology support

Memory

- 1024MB DDR SDRAM (Expandable to 2048MB) (Both slots may
- Expansion memory: 256/512/1024MB, 2.5V, SODIMM, PC2100 DDR SDRAM
- Data/Address Bus Width; 64-bit/32-bit
- Intel® 865PE + ICH5 Chipset

Mass Storage/Optical Drive

- Primary Hard Disk Drive: 80GB* hard disk drive, 5400rpm, Enhanced IDE (ATA-5) Interface, 9.5mm height, 0.2lbs,, Service removable
- Main Module Bay DVD-Multi: ATAPI Interface; Maximum speed (READ): CD-R(24x), CD-RW(12x), CD-ROM(24x), DVD-ROM(8x), DVD-R(8x), DVD-RW(8x), DVD-RAM(2x); Maximum speed (WRITE): CD-R(16x), CD-RW(4x), DVD-R(2x), DVD-RW(1x), DVD-RAM(2x):

Compatibility: CD-ROM, CD-R (read/write), CD-RW (read/rewrite), DVD-ROM. DVD-R (read/write), DVD-RW (read/write), DVD-RAM (read/write); 12.7mm height, user removable

Optional accessories: DVD-ROM, DVD/CD-RW, DVD-R/RW, DVD Multi, FDD, 2nd HDD)

2nd Module Bay: TV-Tuner; (Optional Accessories: Main Battery, DVD-ROM, DVD/CDRW, DVD Multi, DVD-R/RW, weight saver)

Software Decoder: InterVideo® (WinDVD™)

Graphics/Video

- 17.0" Wide XGA TFT active-matrix display****; internal display supports up to 16M colors at 1440 x 900
- NVIDIA® GeForce™ FX Go5200 graphics controller; 64MB DDR external video memory
- Direct X 9.0 support, OpenGL support
- External Color Support/Refresh Rate: (Depending on CRT)

60/70/72/75/85/100/120Hz 800 x 600;

1024 x 768: 60/70/72/75/85/100/120Hz

1280 x 1024; 57/60/70/72/75/85/100/120Hz

1440 x 900: 60/70/72/75/85/100Hz

1600 x 1200; 60/70/72/75/85/100Hz

1680 x 1050; 60/70/72/75/85/100Hz

1920 x 1200; 60Hz

1920 x 1440: 60Hz

2048 x 1536; 60Hz

Input Devices

- Keyboard: Full sized 85 keys with 12 function keys, 2.7mm key stroke, 6mm height; Dedicated Windows® & Application keys support; HotKey function; TouchPad pointing device.
- CD Control Function: Play/Pause, Stop/Eject, Previous, Skip/Next,

Mode Control switch (CD/DVD/Digital Audio)

- **Remote Control for Media Center Edition**
- Toshiba Console button & Instant Access Internet button
- One Touch TV-out button

Expandability

- 2 memory slots (Both slots may be occupied)
- 2 PC Card slot supports 2 Type II and 1 Type III

- Integrated V.92/56K modem; Data and fax support
- Integrated 10/100 Ethernet LAN
- Integrated 802.11a/g Wireless LAN

Due to FCC limitations, speeds of 53kbps are the maximum permissible transmission rates during Download. Actual data transmission speeds will vary depending on line conditions.

Ports

- RGB (monitor) port
- Parallel port
- 4 Universal Serial Bus ports (USB 2.0)
- 2 Infrared port (1 Consumer IR port Optional Toshiba Remote Control; 1 FIR port)
- TV-Out (S-Video)
- RJ-45 LAN port
- RJ-11 modem port
- I.Link (IEEE 1394) port
- Secure Digital® (SD) card slot

Physical Description

- Dimensions (LxWxH): 16.4" x 11.5" x 1.8"
- Weight: 9.9lbs

LED Indicators: Power, HDD, 2nd HDD (common with Module Bav device), DVD/CDRW, DC-IN, Caps Lock, Arrow, Numeric, Main Battery Charging Status, System Sleep/Suspend Status, SD Card, Wireless Communication (right side)

Sound

- Realtek ALC202 Codec Chip. Software Sound
- 16-bit stereo, Windows Sound System Ver. 2.0; SoundBlaster® Pro compatible (in DOS box only)
- Built-in harman/kardon Stereo Speakers
- Direct 3D Sound (supported by sound driver); Hardware acceleration for DirectSound and DirectMusic; Full Duplex and MIDI (play back) support
- Sound Volume (by Dial)
- Ports: External Microphone port, headphone port (stereo), Line-in port

Power Supply

AC Adapter: 120W AC Adapter, 100-240V / 50-60Hz frequency (Universal) input voltage, 19V x 6.3A Output. Dimensions (LxWxH): 5.9" x 2.5" x 1.4"

Weight: 1.38lbs

Battery Pack: 12-cell, rechargeable, removable Lithium Ion (Graphite) battery; 14.8V x 6450mAh Dimension (LxWxH): 5.9" x 5.1" x 0.9"

Weight: 1.41lbs

Battery Saver (in WindowsXP): Stand by, HDD Auto Off, Display Auto Off, Hibernation

Battery Life: 1.5H **

Recharge Time (Off/On): Main Battery- Up to 4Hrs/ Up to 12Hrs ***Battery life may vary depending on applications, power management settings and features utilized. Recharge time varies depending on usage. Battery may not charge while computer is consuming full power. After a period of time, the battery will lose its ability to perform at maximum capacity and will need to be replaced. This is normal for all batteries. To purchase a new battery pack or see information on accessories shipping with your computer, visit the Toshiba website at www.accessories.toshiba.com

Security

Slot for computer lock, HDD and memory (2 screws), Built-in Modem (2 screws), Wireless LAN module (2 screws), Main Module Bay and

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P25-S609.doc Created on 9/10/2003 9:20 AM Page 1 of 3

2nd Module Bay (both by sliding lock and sliding latch), User Poweron password, Setup Security, Keyboard Lock (by HotKey), Screen Blank (by Hotkey), Screen Saver (by software)

Bios

• ACPI, PnP, VESA, DPMS, DDC, SM BIOS, PCI BIOS support

Operating System

- Microsoft® Windows XP Media Center Edition (MCE) preinstalled
- Microsoft® Windows 2000 component drivers on the web This Toshiba computer uses Microsoft's Windows XP Media Center Edition (MCE) 2004 operating system and incorporates copy protection features designed to prevent unauthorized copying of copyrighted audio-visual content. Depending on certain copy protection information that is set by content owners and/or broadcasters, some content may not be available for copying or viewing using MCE on this computer.

Additional Software

- Microsoft® Works
- Drag'n Drop CD+DVD Software
- InterVideo® WinDVD Creator Plus
- Sonic PrimeTime™
- Toshiba Notebook Maximizer
- Intuit® Quicken® New User Edition 2003
- Norton® AntiVirus™ 2003 w/3 Month Subscription
- AOL® (3 –Month offer). AOL OFFER DETAILS: Availability may be limited, especially during peak times. TO AVOID BEING CHARGED A MONTHLY MEMBERSHIP FEE, SIMPLY CANCEL BEFORE THE THREE-MONTH PROMOTIONAL PERIOD ENDS. Premium services carry surcharges and communication surcharges may apply, including AK, even during promotional period. Members may incur telephone charges on their phone bill, depending on their location and calling plan, even during promotional period. Available to new AOL members in the United States, age 18 or older; a major credit card or checking account is required.
 - Adobe® Acrobat Reader
- AT&T® Worldnet® Service 1 Month Free. Telephone access and other charges and other terms and conditions may apply. Offer available to new customers only. Offer expires 4/30/04.
 - Microsoft Internet Explorer
 - Toshiba Custom Utilities
 - ConfigFree[™] Software
 - Satellite Series Online Documentation
- <u>Toshiba Great Software Offer</u>: Receive your choice of two software titles. The software selection includes titles from the follow categories; productivity, education/reference, creativity and entertainment.

Warranty

1 year parts, labor and battery

SelectServ® Warranty Programs

SWP-PEQQ3V Warranty Extension to 3 Years
SWP-PEGQ3V 3 Year SystemGuard
SWP-PEQX3V 3 Year Depot Express

SWP-PEGX3V 3 Year SystemGuard + Depot Express SWP-PEQN3V 3 Year Business On-Site Repair; Next Day Business Day Response

SWP-PEGN3V 3 Year SystemGuard + Business On Site Repair,

Next Business Day Response

Environmental Specifications

- Temperature: Operating: 5° to 35°C (41° to 95°F); Non-operating: -20° to 65°C (-4° to 149°F)
- Thermal gradient: Operating: 15°C per hour maximum; Nonoperating: 20°C per hour maximum
- Relative Humidity: Operating: 20% to 80% non-condensing; Non-operating: 10% to 95% ono-condensing
- Altitude (relative to sea level): Operating: -60 to 3000 meters;
 Non-operating:-60 to 10,000 meters
- Shock: Operating: 10G; Non-operating: 60G
- Vibration: Operating: 0.5G; Non-operating: 1.0G

Product/Part Numbers

Satellite P25-S609 PSP20U-19PS8R

Accessories

Selected Toshiba Accessories

PA3290U-1ACA Global AC Adapter (120W)
PA3291U-1BRS Primary Battery Pack (12 cell)
USB Floppy Disk Drive

PA3133U-1H40 2nd HDD 40GB PA3204U-1H60 2nd HDD 60GB PA3230U-1H80 2nd HDD 80GB

PA3292U-1ETC Modular Bay HDD Adapter
PA3271U-1BTM Bluetooth SD Card II
PA3304U-1ETC Toshiba Remote Control
Toshiba Roller/BackPack

(case only suitable for this notebook)

SD (Secure Digital) Memory

SD-M3203B3 32MB SD Card SD-M6403B3 64MB SD Card SD-M1283B3 128MB SD Card SD-M2564B3 256MB SD Card

Kingston Memory

KTT3614/128 Kingston 128MB Memory
KTT3614/256 Kingston 256MB Memory
KTT3614/512 Kingston 512MB Memory
KTT3614/1G Kingston 1GB Memory Module

Other Accessories

* Go to www.accessories.toshiba.com for additional, available accessories

* GB = 1 Billion Bytes

** Central Processing Unit ("CPU") Performance Disclaimer:

CPU performance in your computer product may vary from specifications under the following conditions:

- use of certain external peripheral products
- · use of battery power instead of AC power
- · use of certain multimedia games or videos with special effects
- use of standard telephone lines or low speed network connections
- use of complex modeling software, such as high end computer aided design applications
- use of computer in areas with low air pressure (high altitude >1,000 meters or >3,280 feet above sea level)
- use of computer at temperatures outside the range of 5°C to 35°C (41°F to 95°F) or >25°C (77°F) at high altitude (all temperature references are approximate).

CPU performance may also vary from specifications due to design configuration.

Under some conditions, your computer product may automatically shutdown. This is a normal protective feature designed to reduce the risk of lost data or damage to the product when used outside recommended conditions. To avoid risk of lost data, always make back-up copies of data by periodically storing it on an external storage medium. For optimum performance, use your computer product only under recommended conditions. Read additional restrictions under "Environmental Conditions" in your product Resource Guide. Contact Toshiba Technical Service and Support for more information.

**** TFT Display Disclaimer: Small bright dots may appear on your TFT display when you turn on your PC. Your display contains an extremely large number of thin-filmtransistors (TFT) and is manufactured using high-precision technology. Any small bright dots that may appear on your display are an intrinsic characteristic of the TFT manufacturing technology.

Return Policy

TAIS does not accept the return of component parts, or bundled software, which have been removed from the PC system. Pro-rata refunds on individual PC components or bundled software, including the operating system, will not be granted. If you wish to return a complete PC system, contact the TAIS dealer where you purchased the product, and comply with the dealer's standard return policies and procedures.

Subject to Change


While Toshiba has made very effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice. For the most up-to-date product information about your computer, or to stay current with the various computer software or hardware options, visit Toshiba's Web site at pcsupport.toshiba.com.

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2003 TAIS satellite_P25-S609.doc Created on 9/10/2003 9:20 AM Rev. 1.1a Page 2 of 3


*** Business Winstone® 2002 BatteryMarkTM Version 1.0
These models achieved the battery life times shown using Ziff Davis Media Inc.'s Business Winstone® 2002 BatteryMarkTM Version 1.0. These tests were performed without independent verification by the VeriTest testing division of Lionbridge Technologies, Inc. ("VeriTest"). Neither Ziff Davis Media Inc. nor VeriTest makes any representations or warranties as to the results of the tests. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. All products used in the tests were shipping versions available to the general public. The battery life results were achieved running the Business Winstone® 2002 BatteryMark™ Version 1.0 on the following system parameters. System parameters were set according to Ziff Davis Media Inc.'s recommendations.

	Battery Life	Catalog Spec (1st)	1.50H
		(1st+2nd)	_
		Number of Conditioning Phase	1
		Life Test Run	2
		2.00 1001114	-
A	CPU Name		Intel® Pentium®4 Processer
	Processor info	speed	3.0GHz
		number of processors	1
	amount of RAM	512MB	
	Amount of secondary RAM cache	512KB	
	Battery	type(1st)	Li-lon
			14.8Vx6450mAh(12cell)
		model number(1st)	PA3291U-1BAS/1BRS
		type(2nd)	-
			-
		model number(2nd)	-
		number of batteries	1st=1, 2nd=0
			•
	Graphics	nVIDIA	
	amount and type of RAM	64MB	
		DDR	
	graphics driver name and version	nVIDIA Display Driver	
	graphics resolution and color depth, refresh ra	17"Wide 1440x900/32bit/60Hz	
	hard disk capacity	60GB (5400rpm)	
	hard disk file system & transfer mode+C15	Enhanced IDE(ATA-5)	
	hard disk controller model	Intel® 82801EBM	
	size of hardware cache if any	-	
	T		
	operating system version, service pack	Windows XP Professional Savice Pack	
	other special conditions	N/A	

Front with display open

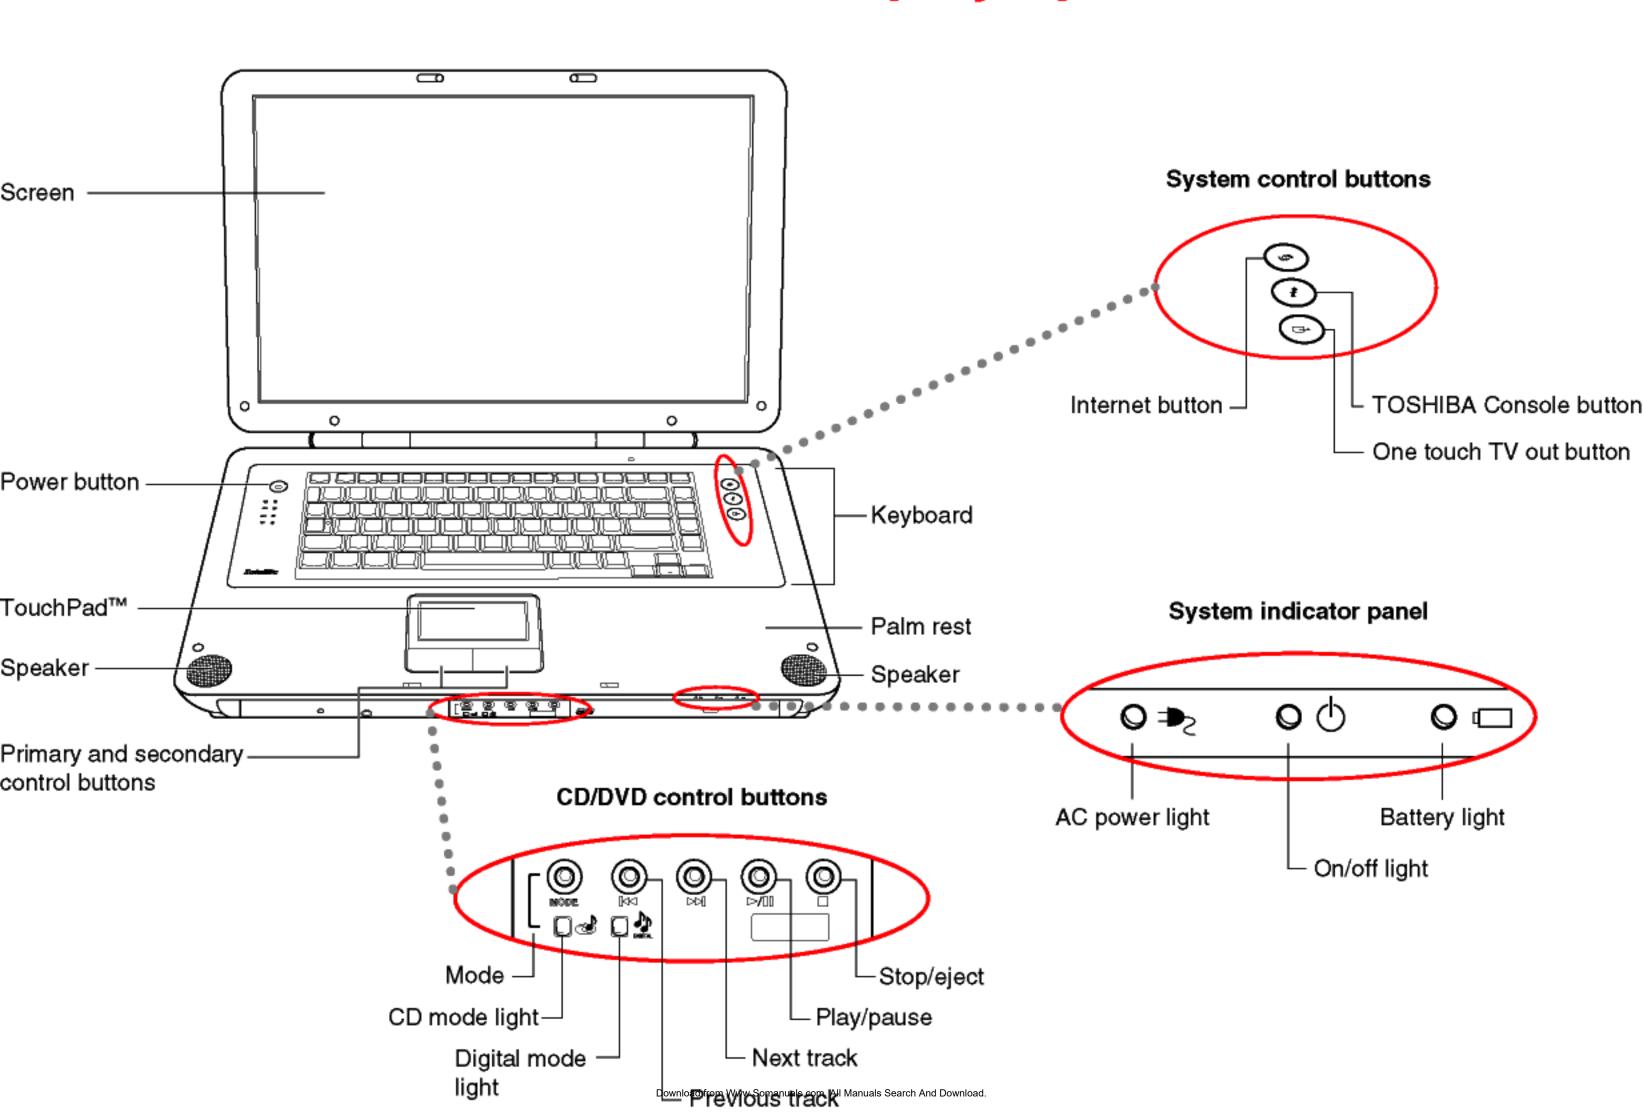


Front with display closed

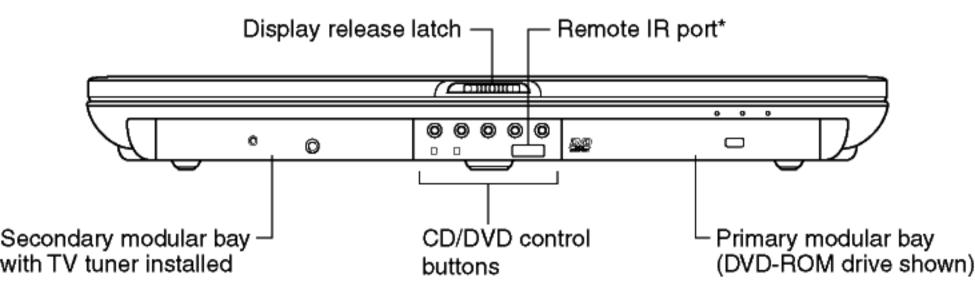


^{*}Functional only with bottomal restricted control.

Left side

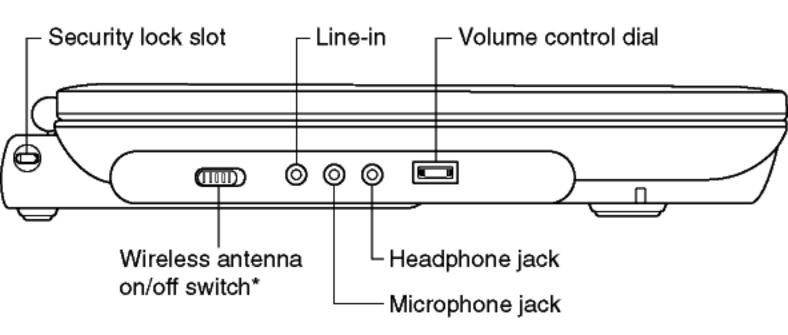


*Functional only on systems with wireless module installed.


Right side

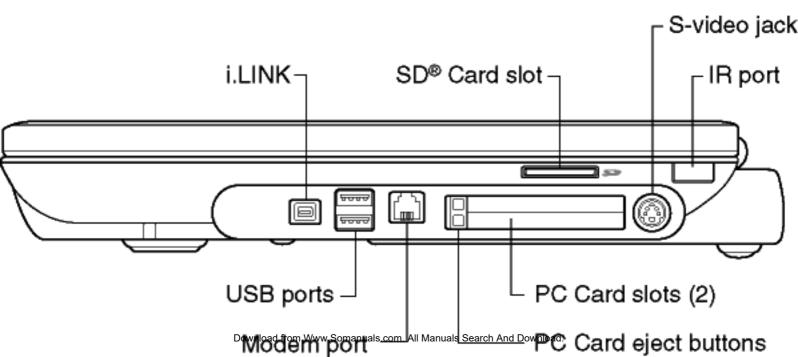

Back

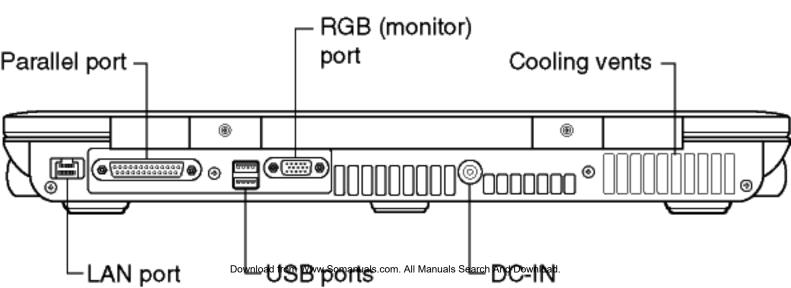

Underside

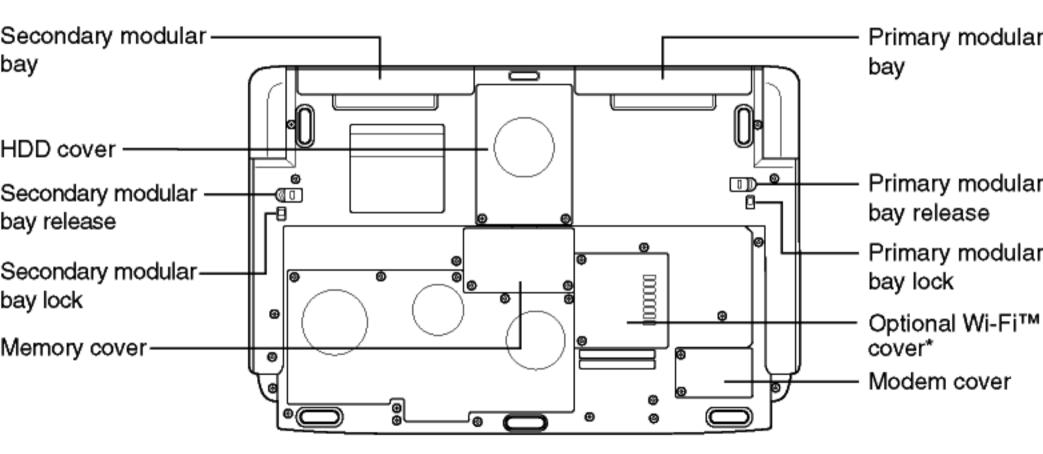

*Functional only on systems with wireless module installed.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com