


The Biggest Thing in LCD TV Monitors

LCD-1044T LCD-1044TC LCD-1044TL LCD-1044TU LCD-1044TW

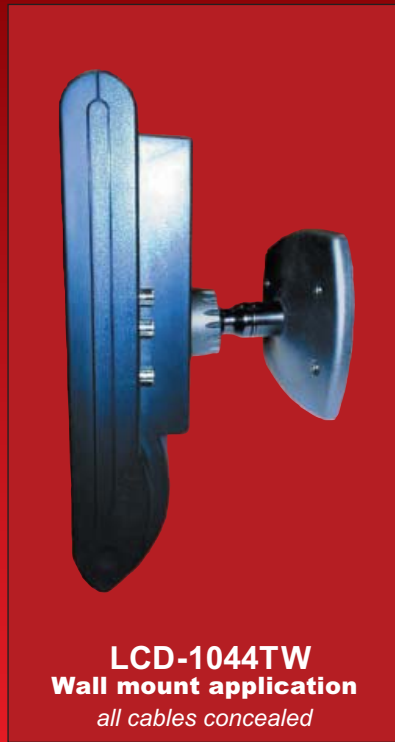

Active Matrix 10.4" Color LCD TV Monitor

- Cable ready ATSC/NTSC/QAM TV tuner
- Built-in AC power contributes to esthetic appearance (electrician required for connection).
- Custom 4-way mount allows user to position unit for maximum viewing pleasure.
 - LCD-1044TC Pan/Tilt 30°/30°/60°/0° (L/R/T/B)
 - LCD-1044TU Pan/Tilt 30°/30°/0°/60° (L/R/T/B)
 - LCD-1044TW Pan/Tilt 30°/30°/30°/30° (L/R/T/B)
- Wall mount and ceiling mount versions attach to double gang electrical box.
- Wireless remote control
- Dual front speakers for easy listening
- Front controls for power, menu, channel/volume up/down, mode, mute
- On-screen display for : brightness, contrast, tint, H/V position, saturation, sharpness
- Case made of durable black ABS plastic
- LCD-1044TC is water tight for protection of cabinetry.
- Response time: 10mS (rising), 25mS (falling)

LCD-1044T Stand Alone Model

- Built-in removeable desk stand included.
- 75mm VESA compliant with plate
- Powered by external AC adapter
- Optional Accessories for LCD-1044T:
 - HM-400 Under-cabinet hinge mount
 - WM-302 4-way adjustable wall mount
 - WM-30 Wall mount bracket (fixed)
 - WM-31 Wall mount bracket (fixed)



LCD-1044TL Unit in Flush Mount Kit

Dimensions (WHD): 305 x 279 x 56mm / 12" x 11" x 2.2"

Cut-Out (WH): 279 x 245mm / 11" x 9.6"

For audio use line out to amplifier to power external speakers.*

**Perfect for
behind-the-mirror
applications**

- Display: 10.4" TFT LCD active matrix
- Back Light: Built-in (CCFT)
- Input Signal: ATSC/NTSC/QAM/CATV, NTSC Composite video
- Resolution: VGA 800 (H) x 600 (V) dots
- Dot Pitch: 0.264 (H) x 0.264 (V)mm
- Brightness rating: 400 cd/m² (Nit)
- Colors: 16.7M
- Contrast Ratio: 500 : 1
- Number of Pixels: 307,200 dots
- Viewing angle L/R/T/B: 60/60/40/60 degrees
- Pixel Configuration: RGB Vertical Stripe
- Input Signal Level: 1.0V P-P (positive) 75 Ohm
- Speakers: 4 ohms, 1 W x 2 (TL version = no speakers*)

LCD-1044T: Dimensions w/o desk stand (WHD): 277 x 246 x 58mm / 10.9" x 9.7" x 2.3"

LCD-1044T: Dimensions w/ desk stand (WHD): 277 x 294 x 73.7mm / 10.9" x 9.7" x 2.9"

LCD-1044TC: Dimensions (WHD): 277 x 246 x 175 / 10.9" x 11.6" x 6.9"

LCD-1044TU: Dimensions (WHD): 277 x 294 x 175 / 10.9" x 11.6" x 6.9"

LCD-1044TW: Dimensions (WHD): 277 x 342 x 178mm / 10.9" x 9.7" x 7"

Actual visible screen size (WH): 211.2 x 158.4mm / 8.3" x 6.2"

Operating temperature: 50~104°F or 10~40°C

Power Requirement: Regulated 12VDC, 4A, negative ground

Power Consumption: 60 W (max)

Includes switching power supply: 100 ~ 240VAC, 4A / 47 ~ 63Hz

Rear Terminal Connections: RCA video IN/OUT jacks, RCA R/L audio IN/OUT jacks, "F" connector for CATV, 2.1mm DC IN jack for LCD-1044T

LCD-1044T: Weight: Net: 1.6 kg./3.5 lbs.

Gross: 2.6 kg./5.9 lbs.

LCD-1044TC: Weight: Net: Est. 2.1 kg. / 4.7 lbs

Gross: 3.4 kg. / 7.6 lbs.

LCD-1044TU: Weight: Net: Est. 2.1 kg. / 4.7 lbs

Gross: 3.4 kg. / 7.6 lbs.

LCD-1044TW: Weight: Net: 1.5 kg./ 3.3 lbs.

Gross: 2.8 kg./6.2 lbs.

GSA Schedule For model LCD-1044TC, LCD-1044TU, & LCD-1044TW only.
GS-07F-0069L, SIN: 246-42(1), 246-50

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>