


10.4" Color LCD with Component Input

LCD-1048HDL LCD-1048HDR LCD-1048HD

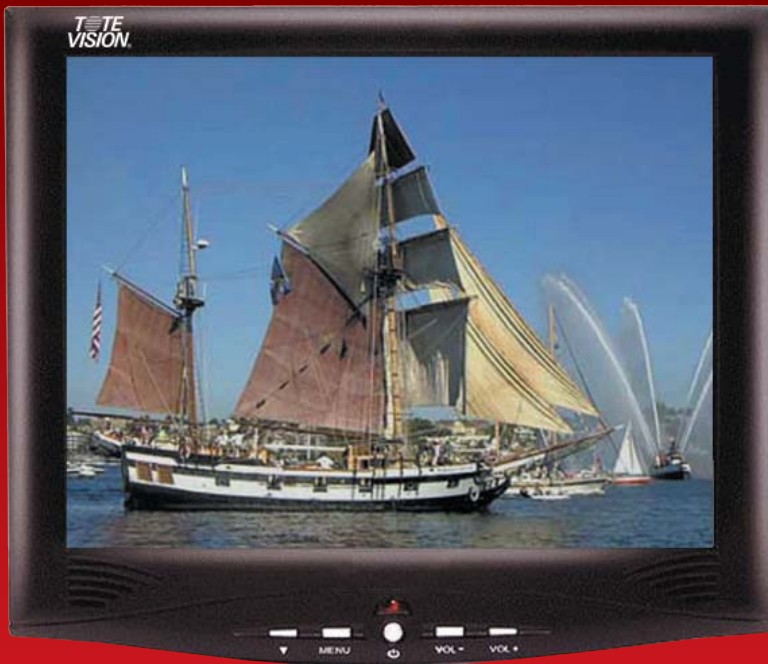

Back View

HD Compatible (supports 480p/i, 720p, 1080p/i)

- RS-232 serial control provided
- Composite video BNC IN/OUT capability
- Underscan capability
- On-screen display controls, with front controls for power, Select, Menu, and Volume Up/Down.
- Wireless remote control provided.
- Hot key on remote control allows easy toggling between composite, S-Video, component, & PC inputs
- Rear IR jack allows direct connection for use with IR repeater systems
- Speaker output on board allows screw down connection for R/L audio
- Built-in amplifier provides ample power to drive right and left stereo 8 ohm speakers
- 2 built-in speakers
- LCD-1048HDL and LCD-1048HDR are made of durable metal with black powder coating.
- LCD-1048HD cabinet is made of durable ABS plastic with 2 key hole slots for wall mounting
- Built-in interface and proper cable exiting for wall arm mounting, VESA 75mm compliant
- Screw down DC feature provides additional security for power connection
- Response time: 15/25 ms (rising/falling)
- SPS included, 100~240 VAC

LCD-1048HDL Unit in Flush Mount Kit

Dimensions(WHD): 337 x 247x 42mm / 13.3" x 9.7" x 1.7"
Installers Cut-Out (WH): 299 x 209mm / 11.8" x 8.2"

LCD-1048HDR Unit in 19" Rack Mount Kit

Occupies 4 RU or 5 RU (call to confirm)

Optional Accessories

- DC-1500 Factory approved car cord
- HM-400 Under-cabinet hinge mount
- WM-31 Wall mount bracket (fixed)
- WM-302 Wall mount with swing arm & 4-way adjustable



HM-400



WM-302



LCD-1048HDL



LCD-1048HDR

Display: 10.4" TFT LCD active matrix

Back Light: 2 x CCFT

Input Signal: [Composite, component, & S-Video, NTSC/PAL auto sensing] analog RGB

Dot Pitch: 0.206 (H) x 0.206 (V)mm

Resolution: 1024(H) x 768(V) [700 lines for CCTV] or

Number of Pixels: 786,432 dots

Brightness Rating: 350 cd/m² (Nit)

Colors: 262,144

Contrast Ratio: 500:1

Viewing Angle L/R/T/B: 90/90/90/90 degrees

Pixel Configuration: RGB Vertical Stripe

Audio output: 5W x 2, 8 ohm

LCD-1048HDR Dimensions (WHD): 19" x 7" x 2" (Occupies 4 RU or 5 RU - call to confirm)

LCD-1048HD Dimension w/o desk stand (WHD): 269 x 229 x 47mm / 10.6" x 9.0" x 1.9"

LCD-1048HD Dimension with desk stand (WHD): 269 x 229 x 152mm / 10.6" x 9.0" x 6.0"

Actual visible screen size (WH): 210 x 158mm / 8.3" x 6.2"

Operating temperature: 50~104°F or 10~40°C

Storage temperature: 14~158°F or -10~70°C

Power requirement/consumption: 12VDC, 2A, negative ground /24W

Rear Terminal Connections: 15-pin mini D-sub, 4-pin RS-232, S-Video, component (RCA x 3), 3.5 PC audio IN, RCA x 2 and BNC composite IN/OUT, RCA L/R audio IN, 3.5 audio line OUT, 3.5 IR IN, L/R screw down speaker connectors, 2.1mm DC jack and screw down DC connector

LCD-1048HDL Weight: Net: 1.94 kg. / 4.28 lbs. Gross: 3.4 kg. / 7.4 lbs.

LCD-1048HDR Weight: Net: 2.79 kg./ 6.14 lbs. Gross: 3.9 kg. / 8.5 lbs.

LCD-1048HD Weight: Net: 1.2 kg. / 2.5 lbs. Gross: 3.3 kg. / 7.3 lbs.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>