


LCD-5200HD

with
RS-232 and
HDMI & DVI

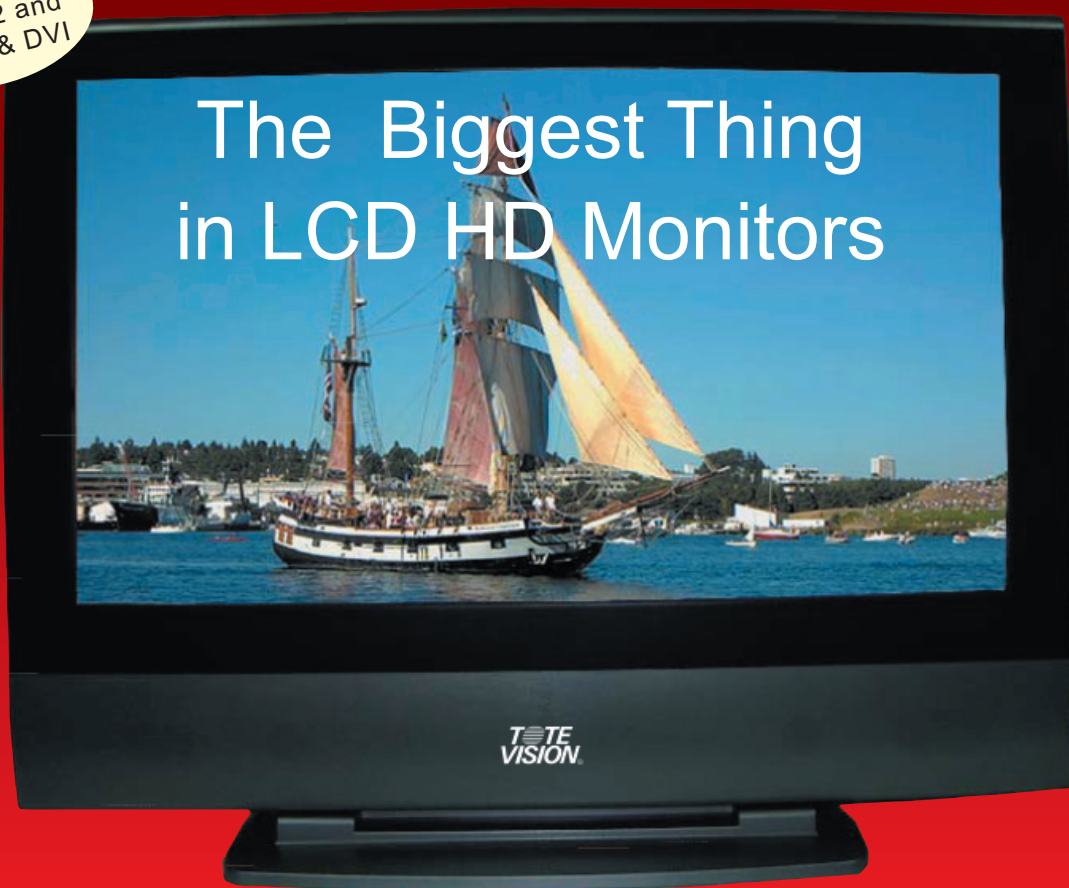

Active Matrix 52" Color LCD HD Monitor

• **True HD displays 1080p/i without down scaling (also supports 480p/i, 576p/i, 720p)**

• **PIP: Picture in picture capability**

- 2 detachable speakers provide 3D MTS stereo
- Surround sound experience with SRS technology
- User-selected color temperature (9300°, 7500°, 6500°) with no video oscillations
- Hard anti-glare coating enhances viewing
- Composite, S-Video, component, DVI, PC, HDMI
- Top controls for channel up/down, volume up/down, source, and menu
- Black case made of durable ABS plastic
- Wide viewing angle
- Active matrix technology eliminates distortion
- Built-in removable desk stand
- Built-in power supply 110~240 VAC
- IR remote control works within 30 feet
- RS-232 serial port control
- 180° rotation display option
- Widescreen 16:9 aspect ratio, 4:3 zoom
- Environmentally safe: RoHS compliant, no x-radiation, power-saving feature

47" Free-standing HD LCD Monitor is also available

Model # LCD-4700HD:

Resolution: 1920 (H) x 1080 (V) dots
 Brightness rating: 550 cd/m² (Nit)
 Contrast Ratio: 1600:1

Optional Accessories

- WM-4700VT Heavy duty dual arm mount for LCD-4700HD, 200 lbs. limit, 4-way adjustable
- WM-3742VT Fixed wall mount bracket

Resolution: 1920 (H) x 1080 (V) dots
Brightness rating: 500 cd/m² (Nit)
Contrast Ratio: 1500:1

Display: 52.0" TFT LCD active matrix
 Back Light: Built-in (24 CCFT)
 Input Signal: Composite NTSC/PAL, S-Video, component, analog RGB, HDMI, DVI
 PC compatibility: IBM compatible
 Dot Pitch: 0.2(V) x 0.2(H)mm
 Colors: 16.7M
 Number of Pixels: 2,073,600
 Response Time: 6.5mS (rising/falling)
 Audio output: 10W x 2
 Speakers (separate): 10W + 10W
 Viewing angle L/R/T/B: 88/88/88/88 degrees
 Pixel Configuration: Stripe
 Input Signal Level: 1.0V P-P (positive) 75 Ohm
 Dimensions w/ desk stand (WHD): 1310 x 892 x 350mm / 51.6" x 35.1" x 13.8"
 Dimension w/o desk stand: 1310 x 832 x 100mm / 51.6" x 32.8" x 3.9"
 Actual visible screen size (WH): 1152 x 648mm / 45.5" x 25.5"
 Operating temperature/humidity: 50 ~ 104°F / 10 ~ 40°C, 20% ~ 90% humidity
 Power Requirements: 110 ~ 240 VAC, 50/60 Hz
 Power Consumption: 236 W (max)
 Rear Terminal Connections: 2 composite RCA Video IN
 Component: RCA YPbPr & R/L audio inputs, and RCA Y/Cb/Cr & R/L audio inputs
 2 S-Video IN
 Audio: 2 RCA R/L audio inputs, PC audio IN, and RCA audio R/L outputs
 PC: RGB 15-pin D-sub
 HDMI, DVI, RS-232: 9-pin
 Power: AC IN
 Weight: Net: 39.1 kg. / 86.2 lbs. Gross: 52.1 kg. / 114.9 lbs.

1319 Dexter Ave. N • Ste. 020 • WA 98109
 Tel: 206-623-6000 • FAX: 206-623-6609
 Email: sales@totevision.com
 http://www.totevision.com



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>