


The Biggest Thing in Small LCD Monitors

**LCD-560
LCD-560L
LCD-560LX
LCD-560X3**



LCD-560 Back View

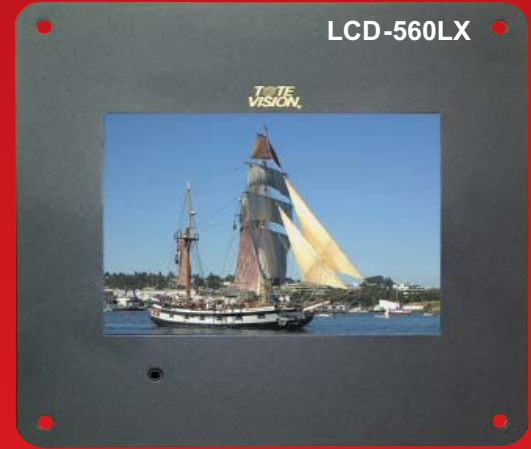

Video Cable



LCD-560X3 Triple Rack Mount Unit

Active Matrix 5.6" Color LCD Monitors

NEW

• LED backlight provides longer life, uses less power and provides better color saturation

- LCD-560 and LCD-560L features 2 composite video inputs with front controls for channels A & B, contrast, tint, color, brightness, and power
- LCD-560 and LCD-560 DIP switches allow user to select mirror image or Up/Down image for both channels A and B, and "auto ON with power" feature
- LCD-560X3 tilts 90° in 19" rack for optimum viewing, occupies 3 rack units
 - Composite video passive loop through capability for all 3 monitors (always active regardless of power). Loop out termination is provided.
 - Self-powered 3 color tally system
 - Front controls: contrast, tint, color, brightness, power, video, S-Video
- Broadcast quality display by auto termination switch in the BNC connector
- LCD-560LX: Rear controls: contrast, tint, color, brightness
 - Front control for power can be disabled by DIP switch
- For color and B&W applications
- Low power consumption
- LCD-560 and LCD-560L cases made of durable steel
- LCD-560X3 case made of durable aluminum & steel
- Active matrix technology allows wide viewing angle
- Active matrix technology eliminates distortion
- Response Time: 22ms
- 1/4-20 mounting pad included for LCD-560
- VESA 75mm compliant
- AC adaptor included.

LCD-560L/LX Flush Mount Kits

Installer's Cut-out (WH): 140 x 134mm / 5.5" x 5.25"

Optional Accessory

MB-3 Desk stand

Display: 5.6" TFT LCD active matrix

Back Light: LED

Input Signal: NTSC/PAL (auto sensing)

Resolution: 960(H) x 234(V) dots

Dot Pitch: 0.118(H) x 0.362(V)

Brightness: 350 cd/m² (Nit)

Contrast Ratio: 300:1

Viewing angle L/R/T/B: 65/65/55/55

Power Requirements: 10 ~ 15 VDC, 0.4 A @ 12 VDC

Power Consumption: 5 W

LCD-560: Dimensions (WHD): 134 x 134 x 21mm / 5.3" x 5.3" x 0.8"

LCD-560L / LCD-560LX: Dimensions (WHD): 174 x 175 x 22mm / 6.8" x 6.8" x 0.9"

LCD-560X3: Dimensions (WHD): 432 x 132 x 50mm / 19" x 5.2" x 2", 3RU

Actual visible screen size (WH): 114 x 87mm / 4.5" x 3.4"

Operating temperature: 50 ~ 104°F or 10 ~ 40°C

Storage temperature: -13 ~ 140°F or -25 ~ 60°C

LCD-560 / LCD-560L Connectons: Cable w/ 2 female BNC and one 2.1mm DC inputs

LCD-560X3 Rear Connectons: BNC video IN/OUT jacks x 3

S-Video IN/OUT jacks x 3

15-pin DB for tally system

2.1mm DC IN jack

LCD- 560: Weight: Net: 400g / 14 oz.

Gross: 0.88 kg. / 1.95 lbs.

LCD- 560L/LX: Weight: Net: 700g / 24.6 oz.

Gross: 0.9 kg. / 2 lbs.

LCD- 560X3: Weight: Net: 2.5 kg./ 5.2 lbs.

Gross: 2.7 kg. / 5.85 lbs.

GSA Schedule

GS-07F-0069L, SIN: 246-42(1), 246-50

Specifications subject to change without notice

©2007 Download from www.Somanuals.com. All Manuals Search And Download

P.27

1319 Dexter Ave. N. • Ste. 020 • Seattle, WA 98109

Tel: 206-623-6000 • FAX: 206- 623-6609

E-mail: sales@totevision.com

<http://www.totevision.com>



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>