

# ASSEMBLY INSTRUCTION




ITEM# 75275-15

1. Connect the wire from the fixture to the power supply wire from post.
  - a) Twist together white wire from the fixture with white wire from post. Cover with wire connector.
  - b) Twist together black wire from the fixture with black wire from post. Cover with wire connector.
  - c) Twist together ground wire from the fixture with ground wire from post. Cover with wire connector.
2. Fasten base onto post using three screws.
3. Install the bulbs (not included). Do not use greater than 60-watt bulb.
4. Thread nipple into bushing, secure with hex nut.
5. Place shade, rubber washer over the nipple and secure by tightening with finial.
6. Restore electric power, and test your new fixture.

**NOTE:** Carefully remove the fixture from the carton. Check that all parts shown in package parts 1 and parts 2 are included.  
Be carefully not to misplace any of the screws or wire connectors, which are needed for installing the fixture.

## PACKAGE PART

|                |   |               |   |
|----------------|---|---------------|---|
| Wire Connector | 3 | Nipple        | 1 |
| Screw          | 3 | Finial        | 1 |
|                |   | Rubber Washer | 1 |
|                |   | Nut           | 1 |

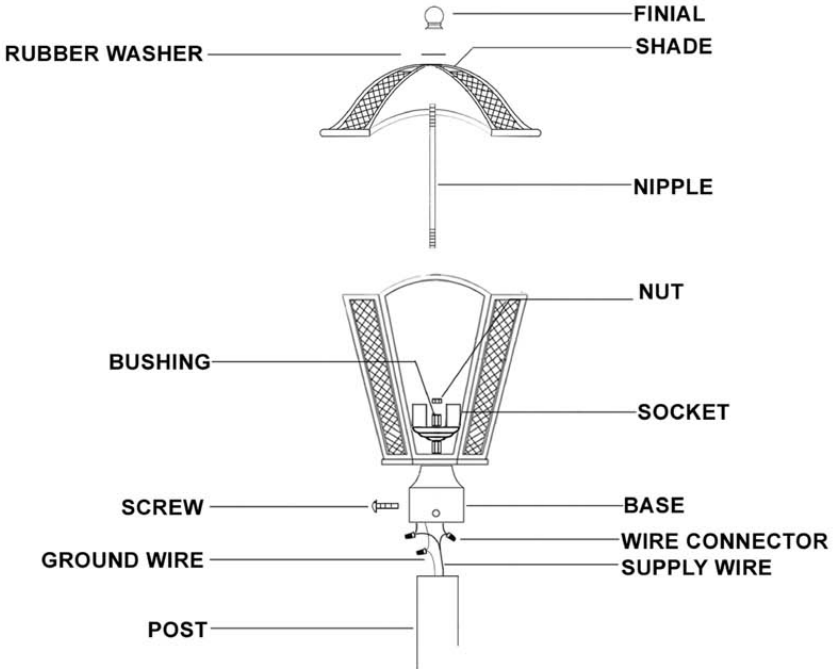

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>