




ASSEMBLY INSTRUCTION

ITEM# 75362-10

1. Thread long support screws into holes of the mounting strip. Secure with hex nut. The support screws should be long enough to protrude out the canopy when mounted.
2. Fasten mounting strip onto wall outlet box using two shorter screws.
3. Connect the wires from the fixture to the power supply wires outlet box.
 - A. Twist together white wire from the fixture with white wire from outlet box. Cover with connectors, and wrap with insulated mucus.
 - B. Twist together white wire from the fixture with white wire from outlet box. Cover with connectors, and wrap with insulated mucus.
 - C. Wrap the ground wire from the fixture and the ground wire located on the mounting strip. Tighten with the green ground screw .
4. Pass canopy through the support screws of mounting strip. Tighten cap nut onto the protruding support screws on mounting strip until the fixture body is held firmly to the wall.
5. Install the bulb into socket . Do not use greater than 60-watt bulb.
6. Install the nipple into bushing
7. Install TIFFANY Shade into top cover, and let the nipple protruded. Secure with ball nut.
8. Then cover the cap to the nipple , and tighten with finial.

Wire Connectors	2	Cap nut	2
Support Screw	2	Nipple	1
5/32" Nut	2	Tiffany shade	1
Green Ground Screw	1	Nut	1
Outlet Box Screw	2	Cap	1
Mounting strip	1	Finial	1

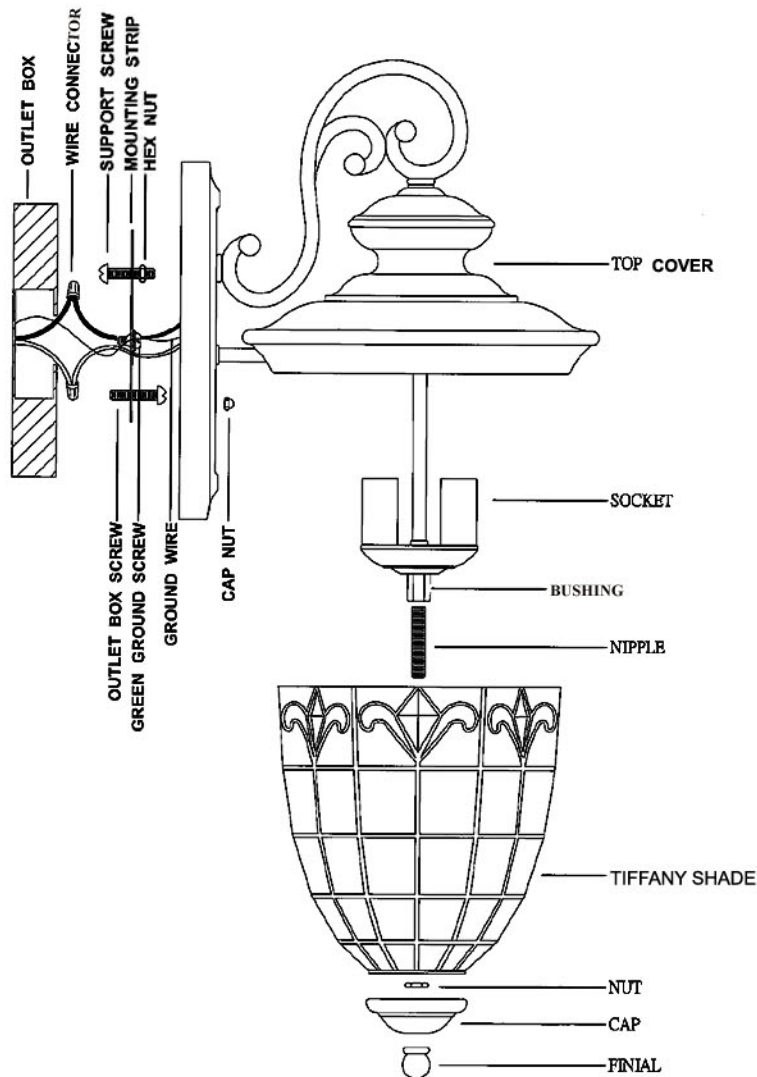

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>