

DIU 200 Module



Compact Door Interface Unit

OVERVIEW

The Compact Door Interface Unit (DIU 200) is designed primarily to provide power to a door lock, as well as local power to a CEM reader when a high level of security is required. It has onboard inputs which can be used to monitor conditions such as a fire alarm or activated break-glass condition.

The DIU 200 improves door security, by allowing the installer to locate lock controls on the secure side of a door, with an intelligent CEM reader on the unsecured side. The DIU 200 communicates with an intelligent CEM reader over a single pair RS485 cable. Upon a valid swipe at the card reader, the reader will instruct the DIU (over the RS485 communications channel) to activate the appropriate output to release the lock using a coded data signal (i.e. coded lock).

As an added benefit, the DIU 200 monitors the status of all standard door monitoring inputs; inputs on an intelligent CEM reader are free for use as general purpose inputs.

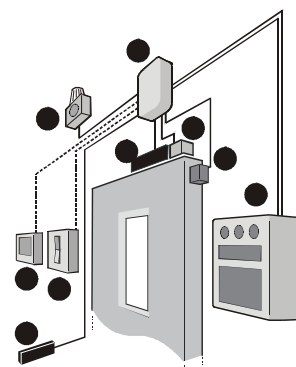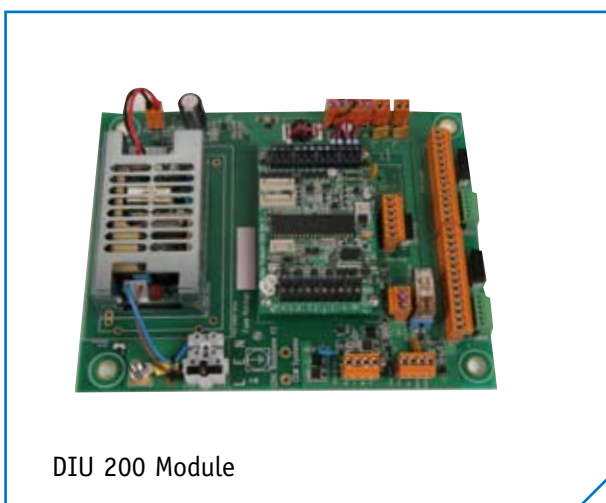

1. DIU Unit Enclosure
2. CEM Reader
3. Sounder
4. Break Glass Unit
5. REX/ Exit Reader or Secure side push button
6. Door Holder (via optional Backplane)
7. Door Lock
8. Lock Sense
9. Door Position sensor

FEATURES

- Door Interface Electronics held on one board
- Provides 'coded lock' serial interface between door hardware and card reader
- On site selectable for 12 or 24 volt lock output
- Fire alarm and break glass inputs for emergency door release
- Designed for ease of installation and maintenance using 2 part connectors throughout
- Compliant with EN55022 (emissions) and EN55024 (access control immunity)
- Backup battery connection for emergency power (optional)

PRODUCT HIGHLIGHTS

Interfaces

The DIU 200 Module provides direct interfaces to the following devices:

- CEM Card Reader
- Electric Door Lock
- Fire Alarm System
- Break Glass Unit
- Exit Push Button
- Inputs from alarm devices

Up to 8 inputs can be wired from alarm/status monitoring devices directly to the DIU 200 module. These devices are used to monitor door sensors, DIU tamper and battery alarms and fire/break glass emergency conditions.

If an input from the fire alarm system or break glass unit changes state, the power to the door lock is automatically dropped; this hardware-controlled facility ensures that the door opens in an emergency situation. Details of alarm conditions can be sent directly to the door controller or to the host, via the card reader, for central alarm notification.

Board Protection

The DIU 200 has been designed to meet the UL294 standard providing resistance to power supply tamper, limiting the current to a reader so that shorting together the 12 Volt terminals prevents the lock from opening.

Reader Inputs

The DIU 200 can also monitor the status of all the door furniture inputs, freeing up the inputs on the intelligent CEM reader for general purpose input monitoring.

Optional PSU Backplane Board and Enclosure

The DIU can also be supplied with an enclosure and backplane board (DIU 200) providing a mains input PSU, battery charging capabilities and door holder connections.

Alternative PSU Enclosure

The DIU 200 module has been tried and tested with the Elmdene 1380 series enclosure. (www.elmdene.co.uk).

TECHNICAL SPECIFICATIONS

PHYSICAL

Size	115 x 76 x 10mm (4.5 x 3.0 x 0.4")
Weight	0.1Kg
Power	
- Voltage	12Vdc
- Current	30mA (excluding locks and heads)
Consumption	
Environmental	
- Temperature	-10° to 40°C (14° to 104°F)
- Humidity	95% non condensing
LED Indicators	+12 Volts OK, Lock supply OK, Lock Status, Watchdog, Fault, Battery Low, RS485 Rx and TX.

FUNCTIONALITY

Inputs	<ul style="list-style-type: none"> * Door Position * Lock Status * Exit Push Button * General Purpose Break Glass Sense Fire Alarm Sense Power Fail Tamper Battery Low (reported internally) Dedicated Power Fail Input * = 4 state tamper protected inputs
--------	--

Outputs	Two 12V or 24V open collector outputs limited to 1.5A (Door Lock and External Sounder)
Reader Output	12V, limited to 800mA
Memory	32kB Flash memory

COMMUNICATION INTERFACE

To Card Reader	RS485 multidrop cable runs using copper wire with maximum length of 1.2km without repeater
- Connection	2 part screw terminals

PRODUCT CODES

DIU/700/B00	DIU 200 (Board Only Module)
DIU/700/000	DIU 210 (Complete with PSU Backplane and Enclosure).

Product specifications and availability is subject to change without notice. Certain product names mentioned herein may be trade names and/or registered trademarks of their companies.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>