

LIFETIME™ 6' X 36"

Comfortable bathing design with form-fitted backrest and molded-in armrests.

Model# 7236L (specify color)

- Acrylic with fiberglass reinforcement
- Lifetime Overflow Drain for maximum water depth
- 2.1 HP self-draining pump/motor
- Ten flow adjustable jets including:
 - Two adjustable Ideal Flow Comfort Jets™
 - Eight adjustable Comfort Jets™
- Three silent air volume controls
- Side-mounted On/Off control
- Complete factory installed and tested whirlpool system
- Self leveling feet
- Designed with undermount installation option

Model# 7236LC (specify color)

- Same as above with the EverClean™ whirlpool system. The EverClean™ antimicrobial system incorporates AlphaSan®, a patented antimicrobial agent manufactured right into the circulation system components, which suppresses the growth of unsightly algae, fungus, mold and mildew.

Model# 7236L.002 Bathing Pool Only


Nominal Dimensions:

72" x 36" x 21-1/4"
(1829 x 914 x 540mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

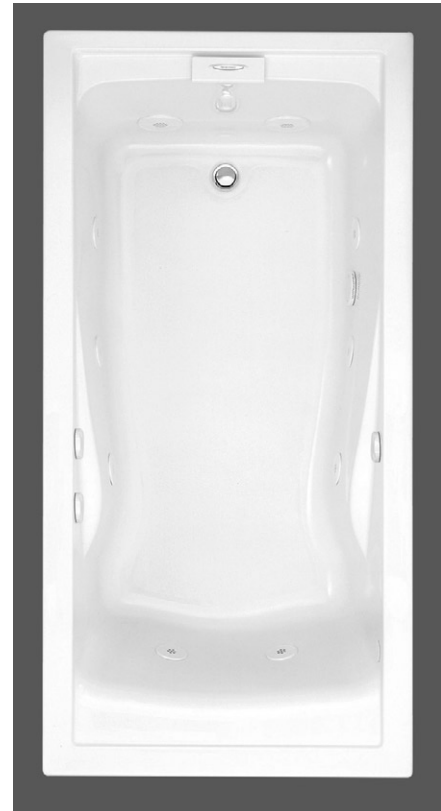

Components Required:

- Bath Filler*: (specify finish)
- Bath Drain: 1599.205.XXX (specify color)
OR 1599.500.020 (white only)

Custom Accessories Available:

- Six Foot Apron: 9271.019.XXX (specify color)
- E-Z-Install™ Whirlpool Heater - EZHEAT-100
- Tile Bead Kit: TILE-BEAD


* See American Standard Faucet Selector

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS

AlphaSan® is a registered trademark of Milliken & Co.

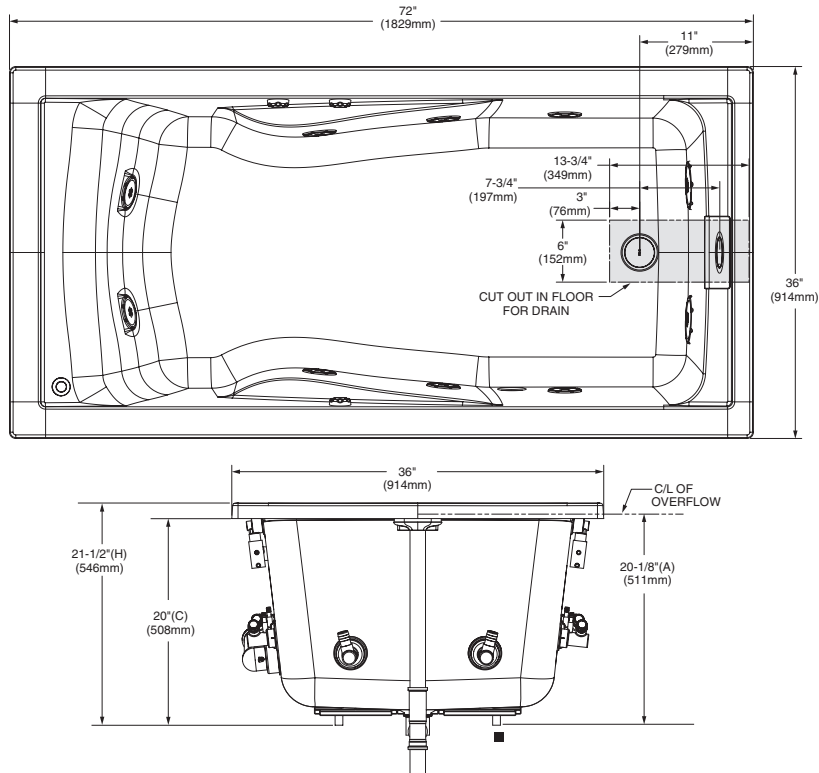

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7.

GENERAL SPECIFICATIONS FOR 7236L WHIRLPOOL	
INSTALLED SIZE	72 x 36 x 21-1/2 In. (1829 x 914 x 546mm)
WEIGHT	106 Lbs. (48 Kg.)
WEIGHT w/WATER	1031 Lbs. (467 Kg.)
GAL. TO OVERFLOW	111 Gal. (420 L)
WHIRLPOOL MIN. OPERATING VOL.	53 Gal. (201 L)
BATHING WELL AT SUMP	53-1/2 x 26-1/4 In. (1359 x 667mm)
BATHING WELL AT RIM	64-1/2 x 30 In. (1638 x 762mm)
WATER DEPTH TO OVERFLOW	18-1/2 In. (470mm)
FLOOR LOADING (PROJECTED AREA)	57 Lbs./Sq.Ft. (280 Kgs./Sq.m)
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
PUMP	2.1 HP, 14.4 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL, DECK MOUNTED SPOUT AND INTEGRATED BATH FILLER FOR ADDITIONAL INFORMATION.

OPTIONAL 3-WALL TILING BEAD KIT No. TILE-BEAD AND APRON No. 6FT-APRON MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>