



TRACTORS AND ATTACHMENTS



GET ATTACHED  
GET IT DONE!





# HERITAGE

## THE VENTRAC STORY

# FEATURES

## THE VENTRAC ADVANTAGE



1941 Marvin Steiner, age 26, builds custom farm equipment.



1974 First Compact, Articulating Tractor



1978 Model S-16 Tractor



1996 Venture Products introduces the Freedom 300, a transporter for the physically disabled.



1998 The Ventrac 4000 series tractor is introduced.



1999 The Ventrac 3000 series tractor is introduced.



2007 The Ventrac 7000 series tractor is introduced.

### A Word from the President



We at Venture Products, Inc. appreciate your interest in VENTRAC products. We know that our company's achievements hinge on your satisfaction; your business is what makes our continuous efforts possible, and we thank you.

My father instilled valuable lessons in my brothers and me from our youth, lessons that set the foundation for the high ethics, standards and quality for which VENTRAC has become known.

VENTRAC all-wheel drive articulating tractors, attachments and specialty equipment are one of a kind. Nowhere will you find a product made with higher quality materials, designed with more maneuverability, flexibility and durability, or backed by a more solid commitment to your satisfaction.

The Steiner family continues to add fresh new ideas and skills as the next generation grows into the business. We invite you, as well, to become part of our team by discovering how VENTRAC can give you the versatility to accomplish any job. The VENTRAC team is very proud of their products, and guarantee that you will be delighted with them as well.

Sincerely,

*Dallas Steiner*

Dallas Steiner  
President



**TODAY** The Steiner family continues designing and manufacturing new and innovative products.

Back: Brothers Dallas, Mark, and Roy Steiner  
Front: Cousins Arlin, Ryan, Denver, and Beth Steiner



**4231TD WITH MOWER**



## Innovative by Design

Ventrac is innovative in design and extremely practical. Add any of the 30 plus commercial-grade attachments and you'll be impressed with the **POWER, PERFORMANCE, and PRODUCTIVITY** that can't be beat. With little or no effort you'll have all your projects done. Ventrac will put you ahead!



## Versatility

More than 30 commercial-grade attachments comprise the Ventrac **MINUTE MOUNT** attachment system. Minute Mount is **QUICK, EFFICIENT**, and requires **NO TOOLS**. With the optional Category One 3-point hitch, non-powered attachments can be operated from behind the tractor individually or simultaneously with the front.





FEATURES

# THE VENTRAC ADVANTAGE



**3121 WITH V-BLADE**



**4131 WITH VERSA-LOADER AND PALLET FORKS**

**4231 WITH POWER RAKE**

## Power



Ventrac offers several engines to meet your power needs. Choose the **VANGUARD** 3/LC, the Commercial Power line from Briggs & Stratton Daihatsu LLC., for the ultimate combination of reliability and performance. Discover what happens when you put an engine this **POWERFUL** in a machine as versatile and maneuverable as Ventrac.

|  |  |
|--|--|
| <b>4100 AIR COOLED</b>                   | <b>3100 AIR COOLED</b>                   |
| B&S Vanguard 31hp Gas 2-cyl 895 cc       | B&S Vanguard 21hp Gas 2-cyl 627cc        |
| <b>4200 LIQUID COOLED</b>                | <b>3200 LIQUID COOLED</b>                |
| Kawasaki 27hp Gas 2-cyl 746 cc           | B&S Vanguard 23.6hp Diesel 3-cyl 850cc   |
| B&S Vanguard 26.5hp Dsl 3-cyl 953 cc     |  |
| B&S Vanguard 31hp Gas 3-cyl 953 cc       |  |
| B&S Vanguard 31hp Turbo Dsl 3-cyl 953 cc | <b>7200 LIQUID COOLED</b>                |
|  | B&S Vanguard 31hp Turbo Dsl 3-cyl 953 cc |


## Maneuverability



The **CENTER-ARTICULATING FRAME** on the 4000 and 3000 series, along with a tight turning radius, allows for easy **MANEUVERABILITY** even in the tightest of places. The rear-steered 7000 series features a 14" turning radius.



## Control



Convenient **S.D.L.A.** controls are located next to the operator for precise control of:

- Speed** - Acceleration and braking
- Direction** - Forward/Reverse
- Lift** - Lift of front-end attachments
- Auxiliary function** - example: angling dozer blade or dumping the slip scoop

**S.D.L.A. Controls**



**Power Steering**



## Durability



In the design stage, Ventrac is field tested to ensure that you will only receive a top notch, **DURABLE MACHINE** that will work for you year-round. **VENTRAC** is built with an all steel, heavy-duty frame. Each unit is carefully assembled and inspected for quality. We stand by our product with Ventrac's three-year residential and two-year commercial V-Plus Warranty.



Our manufacturing facility in Orrville, Ohio is state of the art, utilizing the latest in laser-cutting technology, robotic welding, and a powder coating paint system.





# VENTRAC TRACTORS 3000 Series

The 3000 Series is a power-packed tractor that puts you out front where the action is for maximum **visibility**. Every 3000 series tractor is built with the same **versatility** and **performance** for which Ventrac is known.

Standard on the 3000 series is Ventrac's S.D.L.A. hand control, which allows for easy control of Speed, Direction, Lift and Auxiliary function all with one hand.

These tractors feature all wheel hydrostatic drive and power steering. Combine this with a tight 28" turning radius and you will find the 3000 series can tackle jobs typically reserved for larger, less maneuverable machines.

Get attached using the **Minute Mount System**, which allows you to change over 18 attachments quickly and efficiently from job to job with minimal effort. This is versatility at its best!

**Standard features include:**

- Adjustable Weight Transfer System\*
- Articulating / Oscillating Frame
- Comfort Seat
- Forward and Reverse Foot Control
- Hydrostatic Drive
- Power Steering
- S.D.L.A. Controls
- Tilt Steering Column\*

\* Standard on 3200, optional on 3100



minute  
**MOUNT**  
attachments



**Tandem Drive Train**

Ventrac's patented (T.D.T.) on the 3000 series efficiently transfers power to where it's needed for unparalleled performance.



**3223D**



**3223D WITH STUMP GRINDER**

**3000 Series Standard Features**

- Five Gallon Fuel Tank
- S.D.L.A. Hand Controls (Speed, Direction, Lift, and Auxiliary)
- Engine
- Taillights
- 2" Rear Receiver Hitch
- Patented Tandem Drive Train
- Front Hydraulic Couplers
- Forward & Reverse Foot Control
- Comfort Seat
- Power Steering
- Tachometer & Hour Meter
- Parking Brake
- Halogen Headlight
- Tilt Steering Column\*
- Articulating/Oscillating Frame
- Adjustable Weight Transfer System\*
- All-Wheel Drive



\* Standard on 3200, optional on 3100



# 3100

The 3100 Ventrac Compact Tractor is small enough to handle working around tight spaces and is **powerful** enough to tackle the toughest of jobs. The 3100 features a 21-HP V-Twin gas engine and comes standard with S.D.L.A. and foot pedal controls.

Tilt steering and a suspension seat are optional for added comfort. Weight Transfer is also optional for added stability and traction on hills.



Powered by:

**3100 AIR COOLED**  
B&S Vanguard 21hp Gas 2-cyl 627cc



3121 ©

# 3200

Whether you're mowing grass, grinding out a stump or moving a pile of snow or soil, the 3200 unit is more than enough tractor for whatever project comes your way. A 23.6-HP 3-cylinder liquid cooled Diesel engine provides plenty of power for whatever the task. The 3200 comes standard with an adjustable **weight transfer** system.



Powered by:

**3200 LIQUID COOLED**  
B&S Vanguard 23.6hp Diesel 3-cyl 850cc



Tilt steering column is standard on the 3200.



3223D ©  
shown with mower





# VENTRAC TRACTORS 4000 Series

All-Wheel Drive combined with a low center of gravity and weight transfer system enables Ventrac to conquer even the toughest of terrain. **S.D.L.A.** (Speed, Direction, Lift and Auxiliary) controls and easy access operator platform provide superior ergonomics. Added to all that is the quick, efficient, **Minute Mount System** that allows you to attach over 30 commercial-grade attachments in about a minute or less and requires **no tools!** With the optional, category one 3-point hitch, non-PTO

powered attachments can be operated on the rear of the tractor alone or simultaneously with the front.

#### Standard features include:

- All-wheel drive
- Roll bar
- Seat belt
- S.D.L.A. controls
- Power steering
- Comfort seat
- Front and rear steel skid plates
- 7.25 gallon fuel tank

And more

**minute**  
**MOUNT**  
attachments



Center Oscillating/  
Articulating Frame



**4231 WITH MOWER**



**4131**

#### 4000 Series Standard Features

- |   |                               |
|---|-------------------------------|
| All-Wheel Drive                         | Halogen Headlights            |
| <b>Tachometer &amp; Hour Meter*</b>     | Electric PTO w/Brake          |
| Single Hi/Low Range Shifter             | Skid Plates, Front & Rear     |
| Power Steering                          | Minute Mount Hitch            |
| Center Articulating & Oscillating Frame | Dual Hydraulic Oil Filtration |
| 7.25 Gallon Fuel Tank                   | <b>Weight Transfer*</b>       |
| Roll Bar (R.O.P.S. Certified)           | Front Hydraulic Couplers      |
| <b>Rear Weights*</b>                    | <b>Front Fenders*</b>         |
| 2" Rear Receiver Hitch                  | <b>Foot Rests*</b>            |
| Comfort Seat                            | Parking Brake                 |
|   | S.D.L.A. Controls             |
|   | Heavy Duty Axles              |
|   | Cup Holder                    |
|   | Storage Box                   |
|   | Seat Belt                     |




\*Standard on the 4200, Optional on 4100



# 4100

The Ventrac 4100 is built on a rugged, all-steel frame and utilizes a **dependable** 31-HP Vanguard commercial grade air-cooled engine. Ventrac's high efficiency hydraulic drive system will give you years of enjoyable performance. Customize the 4100 with a variety of accessories including weight transfer system, rear weights, front fenders and more. Drive up and get attached to over 30 Ventrac **Minute Mount** attachments, letting you decide what gets done and when.



Powered by:

**4100 AIR COOLED**  
 B&S Vanguard 31hp Gas 2-cyl 895 cc



# 4200 *VXD*

The Ventrac 4200 Power Unit takes compact tractors to a new level. The articulating and oscillating heavy-duty frame enhances **maneuverability** and **stability** over traditional tractors by conforming to the contour of the terrain.

This incredibly rugged and dependable machine is a wise business investment for golf courses, schools and universities, parks, street maintenance departments, commercial mowing services, contractors, wineries, farms, property owner associations, estate homes and anyone needing to: mow, blow, sweep, edge, scoop and much, much more.

Increase productivity, control costs, and improve your return on investment. One machine can do it all. **Get Attached** to a Ventrac... and **Get it done!**

### THE ULTIMATE HILL MOWER

Get maximum angle of operation with the Vanguard 31HP Turbo Diesel engine, now approved for 30 degrees **continuous operation**, when equipped with dual wheels.



4131



4231TD  
 Vanguard 31hp Turbo Diesel  
 Pictured with optional Suspension Seat & Hub Caps

Powered by:

**4200 LIQUID COOLED**

|                                   |        |
|-----------------------------------|--------|
| Kawasaki 27hp Gas 2-cyl           | 746 cc |
| B&S Vanguard 26.5hp Dsl 3-cyl     | 953 cc |
| B&S Vanguard 31hp Gas 3-cyl       | 953 cc |
| B&S Vanguard 31hp Turbo Dsl 3-cyl | 953 cc |



4227  
 Kawasaki 27hp



4226D  
 Vanguard 26.5hp



4231  
 Vanguard 31hp





# VENTRAC TRACTORS 7000 Series

The newest tractor to join the Ventrac line-up is the 7200. This rear-steered power unit features hydrostatic front-wheel-drive, variable-speed piston wheel motors, and power steering which gives the operator enhanced **maneuverability** and **agility** over traditional tractors.

Ventrac's patented **S.D.L.A.** control, located next to the operator, allows for easy control of Speed, Direction, Lift and Auxiliary function all with one hand. The 7200 also comes standard with the Ventrac **Minute Mount** System which enables the operator to quickly and easily switch between attachments and jobs. Since the attachment is placed out front of the unit, the operator has a natural view offering greater precision.

#### Standard features include:

- Rear Wheel Steering Control
- Front Wheel Drive
- Electric High - Low Speed Control
- S.D.L.A. controls Speed, Direction, Lift, and Auxiliary hydraulics from a single point
- Heavy Duty 2 Speed Hydrostatic Wheel Motors
- Weight Transfer System
- Ventrac Minute Mount System
- Forward & Reverse Foot Control
- Tilt Steering Column
- Folding Roll Bar
- Suspension Seat
- 12 gallon fuel tank

**And more**



Powered by:

**7200 LIQUID COOLED**  
B&S Vanguard 31hp Turbo Dsl 3-cyl 953 cc



**minute MOUNT**  
attachments



®

**7231TD**



**7231TD WITH MOWER**

#### 7200 Standard Features

Fold Down Roll Bar

Comfort Suspension Seat

S.D.L.A. Controls



Tachometer & Hour Meter

Cup Holder

Forward and Reverse Foot Control

Front Hydraulic Couplers

Electric PTO w/Brake

2" Rear Receiver Hitch

Power Steering



Halogen Headlights

12 Gallon Fuel Tank

Weight Transfer

Tilt Steering Column


Minute Mount Hitch





# MINUTE MOUNT / 3-N-1 Attachments

All Ventrac attachments mount in about a minute or less.

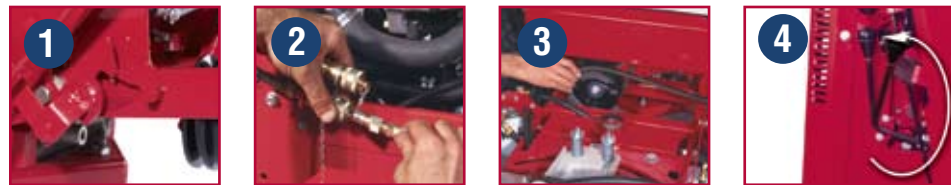

Ventrac's **Minute Mount System** is the ultimate example of practical engineering put to good use. Simply drive up to the Ventrac attachment of choice:

1. Lock onto the holding pins
2. Insert the coupler connections\* and/or...
3. Install the drive belt\*
4. Engage the belt tensioner\*

And you're ready to go!



\*As required by attachment



## Rear Attachments

Attachments with this symbol can also be mounted to the rear using Ventrac's optional 3-point hitch and 3-N-1 adapter.



Ventrac 4000 series tractors can be equipped with a Category One 3-point hitch. With the 3-N-1 adapter mounted to the optional Category One 3-point hitch, non-powered attachments can be operated from behind the tractor alone or simultaneously with the front. **Versatility by Design** just got better!



### AERATOR EB480

The Ventrac Aerator offers the exact tools to address your turf grass conditions. Choose between core or open spoon tines. The tines are replaced either individually or by quickly changing the entire mounting heads.



|                  |                        |
|------------------|------------------------|
| Overall width    | 54"                    |
| Overall height   | 27"                    |
| Overall length   | 27"                    |
| Working width    | 48"                    |
| Aeration density | 6 holes/f <sup>2</sup> |
| Weight           | 217 lbs.               |

### AERA-VATOR EA600

The AERA-vator is designed to fracture the soil beneath the sod without destroying the turf on the surface. This means that turf is ready for use immediately after treatment. Penetrating the soil with no slicing or cutting action, preserves the delicate turf grass roots and stimulates future growth.

**Optional:** Seed-box (shown) allows for over-seeding and aerating simultaneously.



|                          |                               |
|--------------------------|-------------------------------|
| Overall width            | 66"                           |
| Overall height           | 22"                           |
| Overall length           | 34"                           |
| Working width            | 60"                           |
| Tines                    | 96 (0.5625 x 3.5")            |
| Weight                   | 350 lbs.                      |
| Side-to-side tine travel | 1.25"                         |
| Vibrating depth          | 3.75"                         |
| Tine vibration frequency | 3200 rpm<br>=est. 800 cyc/min |
| Aeration density         | 8 holes/f <sup>2</sup>        |

4000 7000 series

### BLADES

The Dozer Blade is hydraulically angled left and right. Adjustable skid shoes, removable locking pin, and reversible cutting edge are standard.

**Optional:** Polyurethane cutting edge and hardened cutting edge.



|                       | KD480    | KD600    | KD720    |
|-----------------------|----------|----------|----------|
| Width                 | 48"      | 60"      | 72"      |
| Height                | 22"      | 22"      | 22"      |
| Angle (right or left) | 30°      | 30°      | 30°      |
| Weight                | 163 lbs. | 203 lbs. | 225 lbs. |

3000 4000 7000 series

### BLOWER KA160

The KA160 Power Blower for the 4000 and 7000 series tractors rotates 180° horizontally left and right with a standard hydraulic motor controlled from the operator seat.



|                 |          |
|-----------------|----------|
| Overall width   | 32.5"    |
| Overall height  | 22"      |
| Overall length  | 36"      |
| Fan             | 16 blade |
| Wind speed      | 180 mph  |
| Volume          | 4000 cfm |
| Weight          | 163 lbs. |
| Hydraulic motor | Standard |

4000 7000 series

### BLOWER LA162

The LA162 Blower for the 3000 series tractor can be angled 180° horizontally left and right with the standard hydraulic motor.




|                 |          |
|-----------------|----------|
| Overall width   | 32.5"    |
| Overall height  | 22"      |
| Overall length  | 42"      |
| Fan             | 16 blade |
| Wind speed      | 160 mph  |
| Volume          | 3400 cfm |
| Weight          | 145 lbs. |
| Hydraulic motor | Standard |

3000 series

### BROOM HB580

The HB580 Broom for the 4000 and 7000 series tractors is hydraulically driven and can be angled right or left using the auxiliary S.D.L.A. lever.

**Optional:** 12V Actuator allows the operator to slow or reverse the rotation of the bristles from the operator seat.

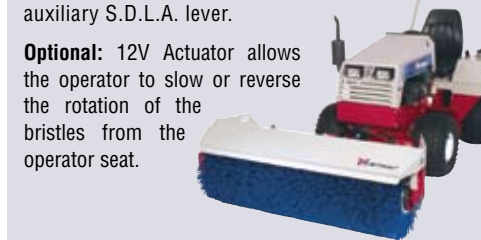

|                |          |
|----------------|----------|
| Overall width  | 68"      |
| Overall height | 24"      |
| Overall length | 54.5"    |
| Broom width    | 58"      |
| Broom speed    | 220 rpm* |
| Weight         | 382 lbs. |
| Gauge Wheels   | Standard |

4000 7000 series

\*Engine speed 3200 rpm

### BROOM LB540

The LB540 Broom for the 3000 series tractor is hydraulically angled left or right using the Auxiliary lever.

**Optional:** Belting curtain and outrigger wheels (inset) for de-thatching your yard.



|                |          |
|----------------|----------|
| Broom width    | 54"      |
| Overall width  | 60.5"    |
| Overall height | 18.5"    |
| Overall length | 46.5"    |
| Broom diameter | 16"      |
| Broom speed    | 300 rpm* |
| Weight         | 240 lbs. |
| Gauge wheels   | Standard |

3000 series

\*Engine speed 3200 rpm

### EDGER ED200

The Edger is designed to edge sidewalks, curbs, cart paths, etc. The edging disc can be reversed for shaping garden and flower beds.

**Optional:** Weights and blower\* for removing edged debris.




\*Blower attaches only to 4000 and 7000 series

|                 |          |
|-----------------|----------|
| Overall width   | 54-66"   |
| Overall height  | 27"      |
| Overall length  | 45"      |
| Weight          | 182 lbs. |
| Weight w/blower | 222 lbs. |
| Disc diameter   | 20"      |
| Cutting depth   | 6"       |

3000 4000 7000 series

### EXCAVATORS

HJ Excavator buckets allow the operator to excavate, dig, and haul material. Its innovative flip-back design allows for forward or reverse excavating.

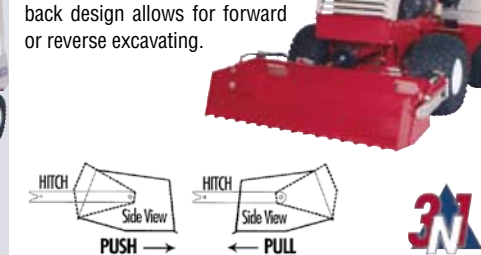

|                  | HJ300               | HJ480             |
|------------------|---------------------|-------------------|
| Overall width    | 36"                 | 53.5"             |
| Working width    | 30"                 | 48"               |
| Height           | 13"                 | 13"               |
| Length           | 34"                 | 34"               |
| Capacity         | 3.6 ft <sup>3</sup> | 5 ft <sup>3</sup> |
| Ground clearance | 11"                 | 11"               |
| Weight           | 145 lbs.            | 189 lbs.          |

3000 4000 7000 series

### FIELD MOWER LQ450

The LQ450 Field Mower is designed to cut heavy grass and small brush growth with three different height settings. Two counter-rotating blades discharge grass to the center rear.



**Optional:** Tree Shield Kit with branch lifters and wheel covers for tree farms (rear weights recommended).

|                |                      |
|----------------|----------------------|
| Cutting width  | 44.5"                |
| Cutting height | 2.25" / 3.5" / 4.75" |
| Height         | 16"                  |
| Length         | 55"                  |
| Weight         | 243 lbs.             |

3000 series

### GENERATOR HG150

The Ventrac Generator is great for mobile power or as a standby unit.

Receptacles include: (4) 120v, 20A receptacles; (1) 120v, 30A Twistlock, (1) 240v, 30A Twistlock, (1) 240v, 50A Range receptacle.



|                           |           |
|---------------------------|-----------|
| Maximum watts             | 15,000    |
| Continuous watts          | 12,500    |
| Voltage                   | 120/240   |
| Amperage                  | 79.2/39.6 |
| Hertz                     | 60        |
| Phase                     | 1         |
| Req. constant shaft speed | 3,000 rpm |
| Net weight                | 196 lbs.  |

4000 7000 series



## HM & HP SERIES FINISH MOWERS

All Ventrac finish mowers (HM, HP, LM) feature single lever height adjustment, easy flip-up deck design, and rear roller for maximum lawn striping. The HP offset mower shifts the mowing deck 6.5" to the left for a shorter cutting radius and increased reach for mowing around ponds or ditches.



| 4000 SERIES    | HM602         | HM722         | HP722         |
|----------------|---------------|---------------|---------------|
| Width of cut   | 60"           | 72"           | 72"           |
| Cutting height | 1.125 - 4.75" | 1.125 - 4.75" | 1.125 - 4.75" |
| Length         | 52"           | 58"           | 58"           |
| Weight         | 385 lbs.      | 450 lbs.      | 450 lbs.      |

4000 7000 series

## LM SERIES FINISH MOWERS



Easy height adjustment.

| 3000 SERIES    | LM440       | LM520       | LM600       |
|----------------|-------------|-------------|-------------|
| Width of cut   | 44"         | 52"         | 60"         |
| Cutting height | 1.5 - 3.75" | 1.5 - 3.75" | 1.5 - 3.75" |
| Length         | 45"         | 45"         | 58"         |
| Weight         | 220 lbs.    | 273 lbs.    | 310 lbs.    |

3000 series

## POWER RAKE KP540

The Power Rake pulverizes, levels, grades and prepares seed beds with 72 replaceable carbide tips. The rotor is both driven and angled hydraulically. Rotation can be changed from the operator seat.



|                         |                  |
|-------------------------|------------------|
| Overall height          | 34"              |
| Overall width           | 62"              |
| Overall length          | 82"              |
| Rotor width             | 54"              |
| Height adjustment       | .125" increments |
| Height adjustment range | 3.5"             |
| Weight                  | 536 lbs.         |

4000 7000 series

## SLIP SCOOPS

Ventrac Slip Scoops are a must-have attachment allowing you to dig, level, and move a variety of materials.



|               | HE300    | HE480    |
|---------------|----------|----------|
| Overall width | 36"      | 52.5"    |
| Working width | 30"      | 48"      |
| Height        | 15"      | 16"      |
| Length        | 34"      | 34"      |
| Weight        | 111 lbs. | 175 lbs. |
| Capacity      | 3.6 f³   | 6 f³     |

3000 4000 7000 series

## SNOW BLOWER KX522

With a serrated auger, the KX and LX snow blowers cut into light or hard-packed snow with ease. Chute is rotated hydraulically left or right 220° on the KX and 180° on the LX.

**Optional:** A 12V actuator allows the operator to change the height of throw from the operator seat. A deep snow auger is also optional on the KX522.



|                  |           |
|------------------|-----------|
| Width            | 52"       |
| Height           | 56.5"     |
| Depth            | 43.75"    |
| Cutting height   | 26.5"     |
| Cutting width    | 48"       |
| Blowing distance | Up to 40" |
| Chute rotation   | 220°      |
| Weight           | 475 lbs.  |

4000 7000 series

## SNOW BLOWER LX420



|                           |           |
|---------------------------|-----------|
| Width (cutting & overall) | 42"       |
| Height                    | 52.5"     |
| Length                    | 43"       |
| Throwing distance         | Up to 40" |
| Chute rotation            | 180°      |
| Weight                    | 374 lbs.  |

3000 series

## SOD CUTTER EC240



The Sod Cutter cuts a 24" wide strip of sod at a user-adjustable depth.



|               |           |
|---------------|-----------|
| Cutting width | 24"       |
| Height        | 11.5"     |
| Length        | 23.5"     |
| Cutting Depth | 0 to 2.5" |
| Weight        | 41 lbs.   |

4000 series

## STUMP GRINDER KC180

The KC180 Stump Grinder features 18 replaceable carbide cutting teeth for large or small stump removal. Standard front mounted mirror allows the operator to see the stump easily while being fully protected from debris.



Standard mirror on KC180

|                                  |          |
|----------------------------------|----------|
| Overall height                   | 19"      |
| Overall width                    | 25"      |
| Overall length                   | 35"      |
| Cutterhead width                 | 3.5"     |
| Overall cutterhead diameter      | 18"      |
| Cutterhead speed                 | 900 rpm* |
| Cutting depth below ground level | 6"       |
| Weight                           | 171 lbs. |

4000 7000 series \*Engine speed 3600 rpm

## STUMP GRINDER LC150

The LC150 Stump Grinder features 12 replaceable carbide cutting teeth. An adjustable blade hydraulically lowers for use as a depth, jackstand and to fill in stump holes.



|                                  |                |
|----------------------------------|----------------|
| Overall height                   | 19.5"          |
| Overall width                    | 21"            |
| Overall length                   | 40"            |
| Cutterhead width                 | 3.5"           |
| Rotor tip speed                  | 2,475 ft/min.* |
| Rotor rpm                        | 620 rpm*       |
| Cutting depth below ground level | 6"             |
| Weight                           | 200 lbs.       |

3000 series

\*Engine speed 3200 rpm

## TERRA RAKES

The Terra Rake is designed to perform a variety of landscaping jobs. Features include: Hydraulic angling and gauge wheels that can be mounted front, rear or removed.



**Optional:** Hydraulic height adjustment link (shown), 10" wing extensions.



|                            | KR502    | KR702    |
|----------------------------|----------|----------|
| Overall width              | 52"      | 70"      |
| Overall width w/extensions | 72"      | 90"      |
| Height                     | 29.5"    | 29.5"    |
| Length                     | 52"      | 52"      |
| Weight                     | 242 lbs. | 325 lbs. |

3000 4000 7000 series

## TILLER KL480

The Ventrac Tiller is designed for easy preparation of gardens and yards. This power-driven front-end attachment allows the operator to easily monitor the tiller's performance. Skid shoe adjustments facilitate cutting depth. Twenty-four high carbon tines are durable and are sequentially spaced to maximize performance.



|               |          |
|---------------|----------|
| Overall width | 53"      |
| Working width | 48"      |
| Length        | 41"      |
| Height        | 22"      |
| Weight        | 345 lbs. |

4000 series

## TOUGH CUT MOWER HQ680

The Ventrac Tough Cut Mower is designed for mowing high grass, thick weeds, and heavy brush. Three heavy-duty blades counter-rotate to cut and drop materials evenly without windrowing. Tilt-up deck provides easy access to the blades.



**Optional:** Adjustable Swivel wheels for a more controlled height of cut.



|                 |                   |
|-----------------|-------------------|
| Working width   | 68"               |
| Cutting heights | 3", 3.625", 4.25" |
| Length          | 45"               |
| Height          | 15"               |
| Weight          | 354 lbs.          |

4000 7000 series

## TRENCHER KY400

The Ventrac Trencher is capable of trenching up to 40 inches deep with a 5.5 inch-wide cut. Depth indicator allows operator to gauge depth of cut from the operator seat. Standard features include: Self-adjusting crumb scraper and combo terminator/cup chain with replaceable carbide teeth.



|                 |          |
|-----------------|----------|
| Overall height  | 27"      |
| Overall width   | 40"      |
| Overall length  | 74.5"    |
| Trenching width | 5.5"     |
| Trenching depth | 40"      |
| Weight          | 493 lbs. |

4000 7000 series

## TURBINE BLOWER ET200

The Ventrac Turbine Blower's front nozzle hydraulically rotates 360° continuously on a vertical plane. The front guard protects the nozzle while doubling as a deflector for blowing forward.



|                            |             |
|----------------------------|-------------|
| Length                     | 69"         |
| Width                      | 27"         |
| Height                     | 34"         |
| Weight                     | 256 lbs.    |
| MPH out of nozzle          | 175 mph*    |
| MPH out front of deflector | 110mph*     |
| Volume                     | 10,000 cfm* |

\*Engine speed 3650 rpm

4000 7000 series

## V-BLADE KV550

The V-Blade is ideal for sidewalk snow removal. Both wings can be independently angled hydraulically forward or back for greater control.



**Optional:** Wing extensions, top deflection flap, and polyurethane cutting edge.



|                       |          |
|-----------------------|----------|
| Length                | 31"      |
| Width straight        | 55"      |
| Width in forward "V"  | 48.5"    |
| Width in backward "V" | 48"      |
| Height                | 21"      |
| Weight                | 240 lbs. |
| Wing angle            | 30° each |

3000 4000 7000 series

## VERSA-LOADER KH500

Discover the versatility and ease of the Ventrac Versa-Loader (shown with standard bucket). Drive up and attach in minutes without tools or heavy lifting. Once connected, choose the standard bucket or six other optional attachments which also feature Ventrac's Minute Mount system to get the job done.



|  |          |
|--|----------|
| Overall height on tractor                      | 67"      |
| Overall width                                  | 41.5"    |
| Overall length w/standard bucket               | 75"      |
| Overall length - tractor, loader & std. bucket | 111"     |
| Width of standard bucket                       | 48"      |
| Capacity of standard bucket (struck)           | 5 f³     |
| Weight w/o tools                               | 508 lbs. |
| Lift capacity including tool                   | 500 lbs. |
| Lift height (at pivot points)                  | 77"      |
| Oil tank capacity                              | 6 gal.   |
| Gallon/min. @ 3600 rpm                         | 9.5 gpm  |

4000 series (Loader is not compatible with the Cab)

## LOADER ATTACHMENTS



**MULCH BUCKET**  
9 cu. ft.

**TINE FORKS**



**POST HOLE DIGGER**  
Fast drive motor

**TREE AUGER**  
Slow drive motor



**BOOM LIFT**

**PALLET FORKS**

minute  
**mount**  
attachments



# PERFORMANCE OPTIONS Accessories



## 3000 SERIES 3100/3200

### CAB

All-weather protection



### REAR WEIGHT BRACKET & WEIGHTS

Increased traction and stability



### ROLL CAGE AND SEAT BELT



### TIRE OPTIONS

All-terrain tires  
(Standard: Turf tires)



### 12-V SWITCH & PLUG

For select attachments and accessories.  
(Models: LX, KR, KV, ES)



## 3100 (Standard on 3200)

### TILT STEERING COLUMN

For comfort adjustment



### ADJUSTABLE WEIGHT TRANSFER



## All Tractors 3000/4000/7000 series

### ARM RESTS



### SPREADER 220

Designed to spread salt, seed, fertilizer, and Penn Mulch



3000 series: Front mount only with 2-N-1, not compatible w/ cab.

Optional drop curtain



### SUSPENSION SEAT

Features tilt-back, lumbar support and weight adjustment



(Standard on 7200)

### 2-N-1

Doubles as a front weight bracket and tow hitch (shown with optional weights)



Optional extension



## 7000 SERIES 7200

### REAR WEIGHTS



### TIRE OPTIONS

All-terrain tires  
(Standard: Turf tires)



### 12-VOLT SWITCH & PLUG

For select attachments  
(Models: EA, HB, KX, KR, KV, ES)



## 4000 SERIES 4100/4200

### CAB

All-weather protection



### CANOPY

Protection from sun and rain



### CHROME HUB CAPS



### DUAL WHEEL KIT

For operating on grades up to 30° and for increased traction, weight distribution and stability on slopes.



### FOOT DIRECTIONAL CONTROL



### FOLD DOWN ROLL BAR

R.O.P.S. approved roll bar that can be folded down for low-clearance areas



### SLOPE INDICATOR

For gauging degree of operation



### STROBE/WORK LIGHT

For increased roadside safety and night operation of the 3-point hitch



### TIRE OPTIONS

Turf and bar tires  
(Standard: All-terrain)



### 12-VOLT SWITCH & PLUG, FRONT

For select attachments  
(Models: EA, HB, KX, KR, KV, ES)



### 12-VOLT OUTLETS, REAR

For operating Ventrac spreader, cell phone, radio, etc.



### WHEEL EXTENSIONS

Increases tread width 6 inches for added stability



## REAR ACCESSORIES - 4000 SERIES

### 3-POINT HITCH

Category one 3-point Hitch for mounting rear implements



### Rear Hydraulic Valves



### 3-Point Controls



### 3-N-1 ADAPTER

Attaches to the 3-point Hitch for mounting select 3-N-1 attachments, counterweights, and towing



### HYDRAULIC TOP LINK



## 4100 (Standard on 4200)

### ADJUSTABLE WEIGHT TRANSFER KIT



### FOOT RESTS



### FRONT FENDERS



### REAR WEIGHTS



### TACH/HOUR METER





# SPECIFICATIONS

## 3000 Series



|                           | 3121   | 3223D  |
|---------------------------|--|--|
| <b>Engines</b>            | Vanguard 21 HP V-Twin Air-Cooled Gas (627 cc) <sup>^</sup> | Vanguard 23.6 HP Liquid Cooled Diesel 3-cyl (850 cc) <sup>^^</sup> |
| <b>Drive</b>              | All-Wheel Drive (AWD)                                      | All-Wheel Drive (AWD)  |
| <b>Tires</b>              | Standard: Turf<br>Optional: All-Terrain                    | Standard: Turf<br>Optional: All-Terrain                            |
| <b>Electrical</b>         | 450 Cranking Amps 12-V / 50 Amps                           | 450 Cranking Amps 12-V / 40 Amps                                   |
| <b>Fuel Tank Capacity</b> | 5.0 Gallons  | 5.0 Gallons  |
| <b>Dimensions</b>         |  |  |
| Wheelbase                 | 38"  | 38"  |
| Length                    | 72"  | 72"  |
| Overall Height            | 47"  | 47"  |
| Width                     | 40.5"  | 40.5"  |
| <b>Travel Speed*</b>      | 7 mph  | 7 mph  |
| <b>Weight**</b>           | 850 lbs  | 1050 lbs   |
| <b>Turning Radius</b>     | 28"  | 28"  |
| <b>Steering</b>           | Power  | Power  |
| <b>PTO</b>                | Electric w/Brake   | Electric w/Brake   |

<sup>^</sup> 20.1 hp gross @ 3200 rpm in the 3121    <sup>^^</sup> 22.7 hp gross @ 3200 rpm in 3223D

## 4100



## 7200



|                                  | 4131  | 7200  |
|----------------------------------|---|---|
| <b>Engine</b>                    | Vanguard 31 HP 2-Cyl Gas, Air-Cooled (895cc)                                      | Vanguard 31 HP Turbo DSL 3-Cyl (953)  |
| <b>Drive</b>                     | All-Wheel Drive (AWD)   | Front Wheel Drive, Rear Steered   |
| <b>Tires</b>                     | Standard: All Terrain 22x12-8<br>Optional: Turf 22x11-10<br>Optional: Bar 21x11-8 | Standard: Turf 24x12-12 Rear: Turf 18x9.5-8<br>Optional: Front: All Terrain 24x12 |
| <b>Electrical</b>                | 450 Cranking Amps 12-V / 50 Amps  | 450 Cranking Amps 12-V / 40 Amps  |
| <b>Fuel Tank Capacity</b>        | 7.25 Gallons  | 12 Gallons  |
| <b>Dimensions</b>                |   |   |
| Wheelbase                        | 43"   | 55"   |
| Length                           | 77"   | 81"   |
| Overall Height (top of roll bar) | 67"   | 78"   |
| Width w/Single Turf Tires        | 48"   | 54" w/turf tires  |
| Width w/Dual Turf Tires          | 70"   | -   |
| <b>Travel Speed*</b>             | Low Range<br>High Range   | Low Range<br>High Range   |
|                                  | 5.2 mph<br>10 mph   | 7.5 mph<br>15 mph   |
| <b>Weight**</b>                  | 1,290 lbs   | 1,600 lbs   |
| <b>Turning Radius</b>            | 43"   | 14"   |
| <b>Steering</b>                  | Power   | Power (Rear)  |
| <b>PTO</b>                       | Electric w/Brake  | Electric w/Brake  |

\* Speeds vary according to tire size, type and inflation    \*\*Weight varies according to engine size, accessories, attachments and tire options

# SPECIFICATIONS

## 4200 VXD



|                                  | 4226D  | 4227   | 4231   | 4231TD   |
|----------------------------------|--|--|--|--|
| <b>Engine</b>                    | Vanguard 26.5 HP DSL 3-Cyl (953 cc)                      | Kawasaki 27 HP Gas 2-Cyl (715 cc)                        | Vanguard 31 HP Gas 3-Cyl (953 cc)                        | Vanguard 31 HP Turbo DSL 3-Cyl (953 cc)                  |
| <b>Drive</b>                     | All Wheel Drive (AWD)                                    | All Wheel Drive (AWD)                                    | All Wheel Drive (AWD)                                    | All Wheel Drive (AWD)                                    |
| <b>Tires</b>                     | Standard: All-Terrain<br>Optional: Turf<br>Optional: Bar | Standard: All-Terrain<br>Optional: Turf<br>Optional: Bar | Standard: All-Terrain<br>Optional: Turf<br>Optional: Bar | Standard: All-Terrain<br>Optional: Turf<br>Optional: Bar |
| <b>Electrical</b>                | 450 Cranking Amps<br>12-V / 40 Amps                      | 450 Cranking Amps<br>12-V / 20 Amps                      | 450 Cranking Amps<br>12-V / 40 Amps                      | 450 Cranking Amps<br>12-V / 40 Amps                      |
| <b>Fuel Tank Capacity</b>        | 7.25 Gallons   | 7.25 Gallons   | 7.25 Gallons   | 7.25 Gallons   |
| <b>Dimensions</b>                |  |  |  |  |
| Wheelbase                        | 43"  | 43"  | 43"  | 43"  |
| Length                           | 77"  | 77"  | 77"  | 77"  |
| Overall Height (top of roll bar) | 67"  | 67"  | 67"  | 67"  |
| Width w/Single Turf Tires        | 48"  | 48"  | 48"  | 48"  |
| Width w/Dual Turf Tires          | 70"  | 70"  | 70"  | 70"  |
| <b>Travel Speed*</b>             | Low Range<br>High Range                                  | Low Range<br>High Range                                  | Low Range<br>High Range                                  | Low Range<br>High Range                                  |
|                                  | 5.2 mph<br>10 mph  | 5.2 mph<br>10 mph  | 5.2 mph<br>10 mph  | 5.2 mph<br>10 mph  |
| <b>Weight**</b>                  | 1,493 - 1,630 lbs  | 1,493 - 1,630 lbs  | 1,493 - 1,630 lbs  | 1,493 - 1,630 lbs  |
| <b>Turning Radius</b>            | 43"  | 43"  | 43"  | 43"  |
| <b>Steering</b>                  | Power  | Power  | Power  | Power  |
| <b>PTO</b>                       | Electric w/Brake   | Electric w/Brake   | Electric w/Brake   | Electric w/Brake   |

\* Speeds vary according to tire size, type and inflation

\*\*Weight varies according to engine size, accessories, attachments and tire options







**Venture Products Inc.**

328 E. Water St.  
P.O. Box 148  
Orrville, OH 44667  
USA



**For more information contact your nearest dealer:**

Toll Free: 1-866-VENTRAC (1-866-836-8722)  
Local: 330-683-0075  
Fax: 330-683-0000  
Email: [info@ventrac.com](mailto:info@ventrac.com)  
Web: [www.ventrac.com](http://www.ventrac.com)

To find a dealer near you go to:  
**[www.ventrac.com](http://www.ventrac.com)**

Venture Products reserves the right to make changes to product design and specifications without notice.

**Venture Products Inc. 2078**



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>