

WHIRLPOOL BRAND COMMERCIAL DRYERS

1/3 HP MOTOR

1/3 HP motor with overload protection.

THERMOSTAT

Single operating thermostat for simple accurate temperature control.



IMPROVED AIRFLOW SYSTEM

Whirlpool® commercial dryers have a new

Blower Housing Wave Insert to increase air velocity up to 10%. This increases efficiency, heating element lifespan, and improves fabric care.*

*Results per Whirlpool dryer testing conducted 7/03–8/04

LARGE CAPACITY METERCASE

Larger coinbox for reduced collections.



LARGE 7.0 CU. FT. DRUM CAPACITY

The increased capacity allows for large loads of clothes to tumble and spread, saving you and your customers drying time and expense.



LARGE LINT FILTER

Top mounted lint filter.



SIDE SWING DOOR

For convenient access, the wide-opening side-swing door can be opened a full 180°.

COMMERCIAL DRYER

Featuring Factory Installed Coin Slide and Coin Box



CEM2940TQ — 29" Electric Dryer CGM2941TQ — 29" Gas Dryer with Factory Installed Coin Slide & Coin Box

90 DAY FACTORY LABOR WARRANTY!!

- Large 7.0 Cu. Ft. Drum Capacity
- Push Button Controls with Stainless-Look Console
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- 3 Timing Cycles Possible with Included Cams*
- Large, Removable, Top-Mounted Lint Screen
- 180 Degree Wide-Opening Reversible Side-Swing Door
- Powdered Paint Top, Door and Cabinet for Years of Reliable Service
- Electric Model Features Element Rated at 5600 Watts, 240 Volt
- Gas Model Features a 22K BTU Burner
- Motor: 1/3 HP with Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element when Motor Stops
- Easy-to-Follow Console Instructions
- Power Cord Sold Separately (Electric Model Only)
- 8 Quarter Coin Slide Capacity, Set Your Dry Price from \$0–\$2 Per Cycle (\$1 factory preset)
- **90 Day Labor/2 Year Limited Parts Only Warranty****

*45 minute timing cam installed, 30 & 60 minute cams included

**Call 1-800-NO-BELTS for warranty details.

To locate a distributor near you, please visit

www.whirlpoolcommerciallaundry.com/distributor, or call 1-800-NO-BELTS.

Download from www.Somanuals.com. All Manuals Search And Download.

COMMERCIAL DRYER SPECIFICATIONS


SINGLE DRYER SPECIFICATIONS

MODEL NUMBER	CEM2940TQ ^{††}	CGM2941TQ [†]
GENERAL INFORMATION Stainless steel look Push Button console, white enamel drum, powdered paint finish cabinet and top, removable lint filter, improved meter case.	Metercase Model Factory Installed Coin Slide and Coin Box, \$1.00 Factory Preset \$0-2 per Cycle,	Metercase Model Factory Installed Coin Slide and Coin Box, \$1.00 Factory Preset \$0-2 per Cycle,
ELECTRICAL REQUIREMENTS	3-Wire Nominal 240/208V, 60 Hz., A.C. Standard 30-amp Breaker/Fuse Branch Circuit per Dryer (subject to local codes)	Nominal, 120V, 60Hz., A.C., Standard 15-amp Breaker/Fuse Branch Circuit per Dryer (subject to local codes)
MOTOR	¹ / ₃ HP Single Speed Motor with Built-In Overload Protector 5.9-amps Max Rating	¹ / ₃ HP Single Speed Motor with Built-In Overload Protector 5.9-amps Max Rating
HEATER TYPE	ELECTRIC	GAS**
HEATER/BURNER RATING (Add 500 watts approx for motor on all dryer models)	Heater Rated at 5600 Watts	22,000 BTUH Natural Gas
OPERATIONAL AMPERAGE (Does not include control or gas valve)	Motor—4.0-amps No load Heater—23.33-amps @ 240V 27.33 Total	Motor—4.0-amps No load
DIMENSIONS See Illustrations	42.875"H*, 29"W, 27.75"D	42.875"H*, 29"W, 27.75"D
SHIPPING WEIGHT (EST.)	147 Lbs.	147 Lbs.
DRUM VOLUME	7.0 Cu. Ft.	7.0 Cu. Ft.

*(height at meter case top) **Burner orifices are available for manufactured, natural, mixed, and LP gas with varying BTU ratings. †LP Conversion Kit: 49572

††Power cords on electric models sold separately Energy information is available online at www.whirlpoolcommerciallaundry.com/products.

Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

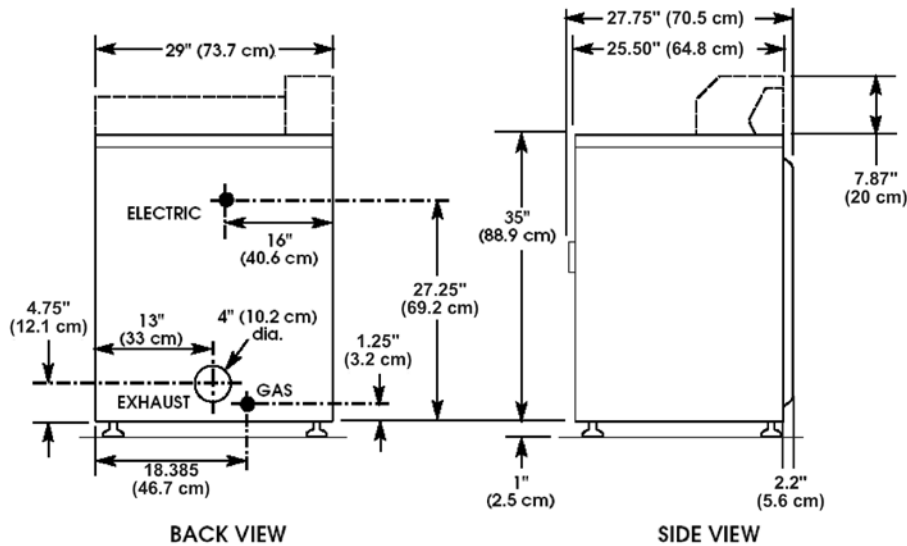

Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

The diagrams show two types of exhaust duct configurations: a 4" Hood and a 2 1/2" Hood. The 4" Hood is shown with a 4" diameter duct and a 4" diameter hood. The 2 1/2" Hood is shown with a 2 1/2" diameter duct and a 4" diameter hood.

# of 90° Turns	4" Hood	2 1/2" Hood
Maximum Length of 4" Diameter Rigid metal Duct		
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum Length of 4" Diameter Rigid metal Duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.

From Whirlpool Corporation — A World Leader in Laundry Products

<http://www.whirlpoolcommerciallaundry.com>

TORX is a registered Trademark of Textron Industries, Inc.

®Registered trademark/™Trademark of Whirlpool, U.S.A.

©2008 Whirlpool Corporation. All rights reserved.

Whirlpool Corporation • Benton Harbor, Michigan 49022 U.S.A.
 Download from www.Somanuals.com. All Manuals Search And Download.



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>