

WHIRLPOOL® BRAND COMMERCIAL DRYERS

1/3 HP MOTOR

1/3 HP motor with overload protection.

THERMOSTAT

Single operating thermostat for simple accurate temperature control.



IMPROVED AIRFLOW SYSTEM

Whirlpool® commercial dryers have a new

Blower Housing Wave Insert to increase air velocity up to 10%. This increases efficiency, heating element lifespan, and improves fabric care.*

*Results per Whirlpool dryer testing conducted 7/03-8/04



LARGE 7.0 CU. FT. DRUM CAPACITY

The increased capacity allows for large loads of clothes to tumble and spread, saving you and your customers drying time and expense.

PULL-UP LARGE CAPACITY TOP MOUNTED LINT FILTER



SIDE SWING DOOR

For convenient access, the wide-opening side-swing door can be opened a full 180°.

RUST PROOF SCREWS

Rust Proof Stainless Steel Torx® control panel screws give your machines added security and service life.



ON PREMISE NON METERED COMMERCIAL DRYER

Featuring Mechanical Controls



GCEM2990T — 29" Electric Dryer GCGM2991T — 29" Gas Dryer Commercial Dryers

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

- Large 7.0 Cu. Ft. Drum Capacity
- Push Button Controls
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- Large, Removable, Top-Mounted Lint Screen
- 180 Degree Wide-Opening Side-Swing Door
- Powdered Paint Cabinet and Top
- Front-Service Accessibility
- Electric Model Features Element Rated at 5600 Watts, 240 Volt
- Gas Model Features a 22K BTU Burner
- Motor: 1/3 HP With Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element When Motor Stops
- Easy-to-Follow Console Instructions
- Power Cord Sold Separately (Electric Model Only)
- 2 Year Limited Parts Only Warranty*

**Call 1-800-NO-BELTS for warranty details.

WARRANTIES

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

WASHER WARRANTY

2-Year Limited (parts only)

For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-NO-BELTS


COMMERCIAL DRYER SPECIFICATIONS

SINGLE DRYER SPECIFICATIONS

MODEL NUMBER	GCEM2990TQ††	GCGM2991TQ†
GENERAL INFORMATION Stainless Steel Look Push Button Console, white enamel drum, powdered paint finish cabinet and top, removable lint filter	Full Console On Premise Electric Dryer, 3 Cycles: Timed Dry, Automatic, No Heat 3 Temperatures: High, Medium and Low	Full Console On Premise Electric Dryer, 3 Cycles: Timed Dry, Automatic, No Heat 3 Temperatures: High, Medium and Low
ELECTRICAL REQUIREMENTS	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard 30 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)	Nominal, 120 Volt, 60Hz A.C., Standard 15 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)
MOTOR	1/3 HP Single Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating	1/3 HP Single Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating
HEATER TYPE	ELECTRIC	GAS*
HEATER/BURNER RATING (Add 500 Watts Approx. for Motor on all Dryer Models)	Heater Rated at 5600 Watts	22,000 BTU/h Natural Gas
OPERATIONAL AMPERAGE (Does not Include Control or Gas Valve)	Motor — 4.0 Amps No load Heater 23.33 Amps at 240 Volt 27.33 Total	Motor — 4.0 Amps No load
DIMENSIONS See Illustration Below	42 7/8" H, 29" W, 27 3/4" D	42 7/8" H, 29" W, 27 3/4" D
SHIPPING WEIGHT (EST.)	122 Lbs	124 Lbs
DRUM VOLUME	7.0 Cu. Ft.	7.0 Cu. Ft.

*Burner orifices are available for manufactured, natural, mixed, and LP gas with varying BTU ratings. † LP conversion Kit: 49572. ††Power cords on electric models sold separately. Energy information is available online at www.whirlpoolcommerciallaundry.com/products.

Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

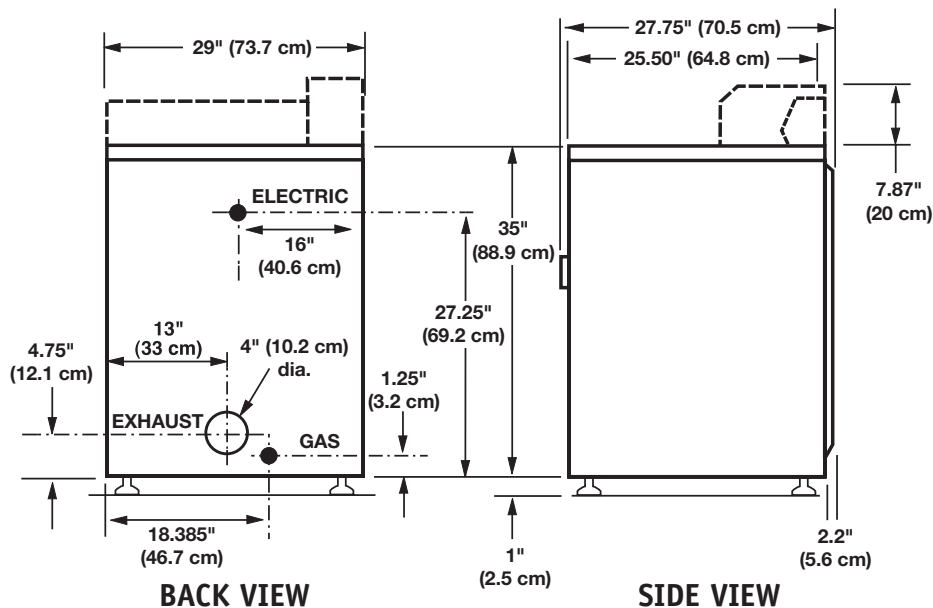

Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

# of 90° turns	4" Hood	2 1/2" Hood
Maximum length of 4" diameter rigid metal duct		
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum length of 4" diameter flexible metal duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>