


# whirlwind

99 Ling Rd  
Rochester, NY 14612  
585 663-8820 Fax 585 865-8930

## SAT-1

Satellite Module and  
Headphone Breakout Box

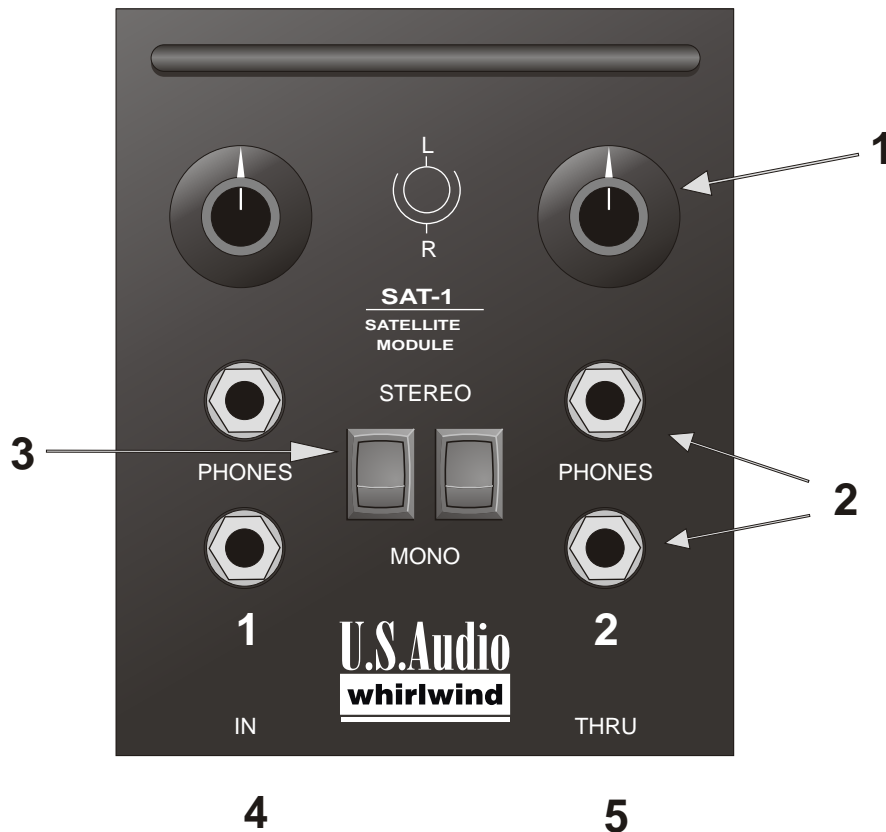

### 1: Volume Controls

Provides separate left/right volume control. When used in conjunction with the Stereo/Mono switch, you can achieve a “mix” between channels.

### 2: Headphone Outputs

Two outputs are provided for each of the two sections on the Satellite module. Each set is wired in parallel.

### 3: Stereo/Mono Switches

One switch is supplied for each section of the SAT-1

### 4: IN

Input to Satellite Module. Standard XLR jack is provided so that hookup can be accomplished with standard microphone cables.

### 5: THRU

Wired parallel to the input jack, can be used for “Daisy Chaining” modules.

### XLR PINOUT

Pin 1 = shield  
Pin 2 = ring (right)  
Pin 3 = tip (left)



When using headphone impedances of 50 ohms or less, do not power the SAT-1 with an amplifier rated greater than 45 watts. Failure to observe this will burn out the current limiting resistors inside the unit and void the warranty.

**Optional Equipment:** PCHLIP for mounting SAT-1 on a microphone stand. Available at authorized Whirlwind dealers.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>