



# Electric Forsaire Counterflow Furnaces

Totally automatic thermostat-controlled, low-cost heating for one to two rooms – easy and inexpensive to install!

The practical choice for those areas where natural or propane gas is not convenient to install. It provides low-cost, floor-to-ceiling comfort (31,400 Btu/hr), is thermostatically controlled, and is ideal for basements and room additions.

Freestanding or recessed, the Electric Forsaire is totally automatic and includes a wall-mounted thermostat. Our decorator styling is at home almost anywhere with a scratch-resistant, soft-white finish to complement your décor.



31,400 Btu/hr.  
9.2 kW

## ***Electric Forsaire***

This model's powerful counterflow blower system receives air at ceiling level, warms it and quietly delivers it at floor level to give an equalized floor-to-ceiling temperature! Installs easily and inexpensively.

### ***Design Features***

- Freestanding or recessed, Forsaire Electric Furnaces are ideal for homes, apartments, offices, schools, cabins and many other applications
- Underwriters Laboratories (UL) Listed
- Heating capacity of 31,400 Btu/hr
- Multi-room heating with optional outlet kit
- Attractive, décor compatible, scratch and abrasion resistant powder-coat, soft-white finish
- Counterflow blower system circulates ceiling-to-floor warm air
- Occupies less than one square foot of floor space
- Totally automatic fan controls and safety devices
- Wall-mounted thermostat included

# Forsaire Electric Furnace

Model	KW Input	Heating Output Btu/hr		Operating Voltage Min-Max	Dimensions			CFM 115V	AMPS	Discharge Air Temp at 240V	Shipping Weight (lbs.)
		at 240V	at 208V		Width	Depth	Height				
3144030	9.2	31,400	23,600	207 - 253	14 $\frac{1}{8}$ "	7"	72 $\frac{1}{2}$ "	375	40	80°F Rise	60

## Easy Installation

Forced air electric wall furnace requires less than one square foot of floor space and provides warm air circulation for maximum comfort.

The 9.2 kW input, 31,400 Btu/hr output model delivers heat into one or two rooms by a large, quiet blower. This model may be recessed into the stud space or surface mounted. With a cabinet depth of seven inches, recessed installation provides a projection of only three inches into the living space. A freestanding application solves the problem in otherwise hard-to-heat areas. Totally automatic thermostat, fan controls and safety devices are factory supplied.

## Features

All wiring and controls are easily accessible from the front. Transformer, terminal block, relay and motor are factory-prewired with thermostat wires pigtailed outside. Total system plus individual elements are protected by safety limit switches.

## Blower System

Powerful, lint-free patented peripheral blower system and heavy duty motor combine to deliver warm air smoothly and quietly on vibration-free mountings. Blower features self-cleaning air scoop design. Motor, cooled by centrifugally swept air steam, is equipped with self-aligning porous bearings. No filter required.

## Thermostat

Relay and 24-volt wiring provide optimum safety and operation. Low differential thermostat prevents excessive temperature swings.

## Accessories






### Rear-Outlet Register

Mount flush on rear wall for heat to be delivered through the register.  
**Model 6501**, shipping weight 7 lbs.


### Diffuser Grille

A snap-on diffuser grille is available for all models. When warm air discharges from the front, a diffusing grille can be used to divert heat to the right, left or both directions.

**Model 6704** - One-Way Diffusing Grille  
 Shipping weight 3 lbs.  
**Model 6703** - Two-Way Diffusing Grille  
 Shipping weight 3 lbs.

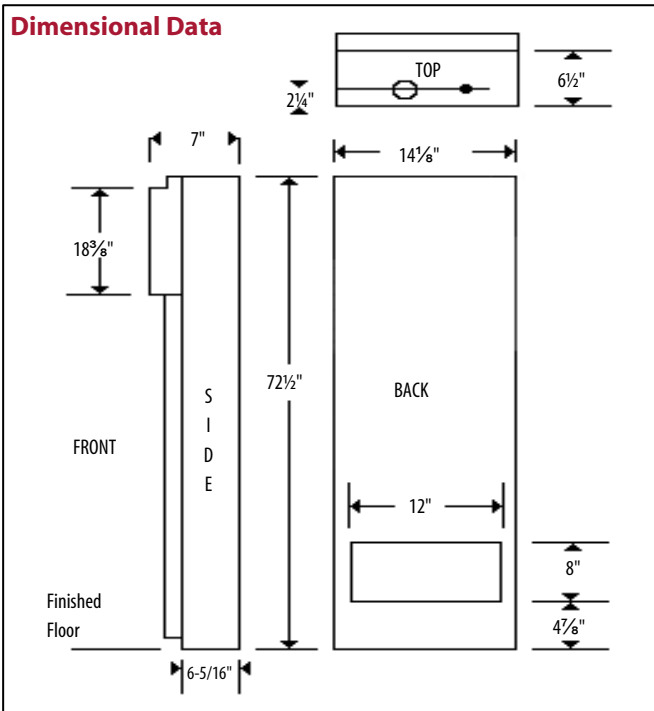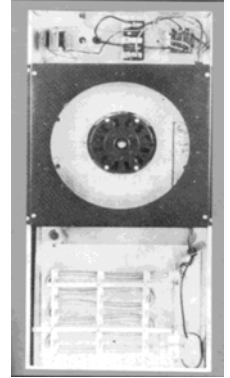

## Typical Installations

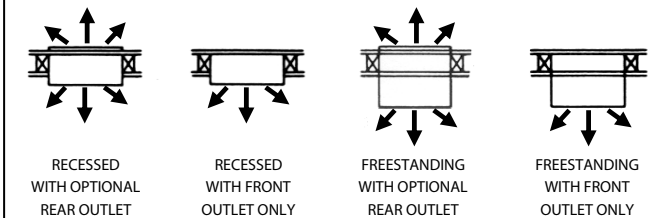

## Recommended Minimum Clearances

6" between the furnace and adjacent walls  
 0" between the furnace and floor

## Important

- Read owner's manual before using/installing.
- Photographs are representative only.
- Check local codes and ordinances for permitted uses.
- Consult installation manual for clearances prior to installation.
- We reserve the right to amend product specifications without notice.
- Installation and servicing recommended by a qualified service person.
- Please read the warranty for any limitations or disclaimers. All parts carry a one-year limited warranty.



250 West Laurel Street · Colton, California 92324 USA  
 (909) 825-0993 · Fax: (909) 370-0581 or (909) 824-8009  
 Consumer Line: (888) 256-6465  
 Homeowner Assistance: (909) 426-0978  
 www.e-wfc.com



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>