

ONE 2 ONE™ FM Receiver • Model R1-216



Description:

The PPA R1-216 is narrowband, single-channel, body-pack style receiver that operates on the 216 MHz bandwidth. It features an impact-resistant case and a belt clip for hands-free operation. Each receiver is pretuned, and field adjustable by internal tuning coil. The R1-216 will operate up to 100-300 feet when used with a T1-216 transmitter. A 3.5 mm mono phone jack accommodates low-impedance mono ear-phones, headphones and neckloop telecoil couplers. Operating on two (2) AA batteries, each unit will perform continuously up to 20 long-lasting hours. Alternatively, NiMH AA rechargeable batteries can be used for 15 hours of performance. Each receiver features drop-in charging points, which allows up to 16 units to be charged at once in a single CHG 1600 multi-charger.

Applications:


- Group Tours • Destination Marketing Organizations • Cruise Ships • Tourism Offices
- University Tours • Large-Scale Guide

R1-216 Receiver:

Dimensions:	3-5/8" L x 2-3/8" W x 7/8" H (92.1 mm x 60.3 mm x 22.2 mm)
Weight:	4.6 oz (130 g) with batteries
Color:	Neptune blue, shatter-resistant polypropylene
Battery Type:	Two (2) AA 1.5 V non-rechargeable Alkaline batteries (BAT 001), 50 mA nom. current drain, 20 hours approx. life (OR) Two (2) AA 1.5 V NiMH rechargeable batteries (BAT 026), 50 mA nominal current drain, 14 hours per charge approx., recharges in 14-16 hours, uses CHG 1600 Multiple Battery Charger
Operating Frequencies:	216.325 MHz, standard (216.425, 216.625, 216.725 MHz optional)
Stability:	± .005%, crystal reference, PLL
FM Deviation:	Narrow-band FM, 10 kHz P-P, 100 µS de-emphasis
AFC Range:	± 120 kHz
Sensitivity:	.5 µV at 12 dB Sinad with squelch defeated, squelches at 8 µV for min. 50 dB S/N ratio
Freq Response:	200 Hz to 10 kHz P-P, +2, -4 dB
Signal-to-Noise Ratio:	60 dB at 10 µV
Receive Antenna:	Integral with earphone cord
Audio Output:	35 mW, max. at 16 Ω; for use with 8–32 Ω mono headphones
Output Connector:	3.5 mm mono phone jack
Squelch:	Set to turn off audio under weak or no signal condition
Controls:	Volume: thumbwheel/on/off/volume
Indicators:	"On" LED
Note:	Specifications are electrical performance
Approvals:	FCC, WEEE
Warranty:	5 years, parts and labor*

*90 days on accessories.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

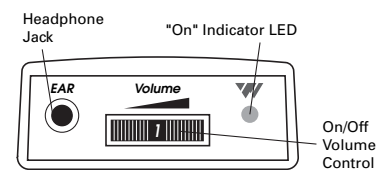

R1-216 Top



R1-216 Front

ONE 2 ONE™ FM Receiver • Model R1-216



Bid Specs:

The PPA R1-216 receiver shall be housed in an impact resistant plastic case with a hinged battery door that does not separate from the receiver. The receivers shall be a body-pack type and include a belt-clip case for hands-free operation. The receiver shall have a 3.5 mm mono phone jack and accommodate low-impedance mono earphones, headphones and neckloop telecoil couplers. It shall have drop-in charging points on the bottom of the unit. Receiver frequencies shall be pre-tuned and adjustable by means of an internal tuning coil. A four-channel receiver model shall be available for use with the system. The receivers shall receive FM signals in the 216 MHz bandwidth with 100 μ S de-emphasis. The receivers shall provide a maximum output of 35 mW at 16 Ohms with an earbud-type earphone. The system electrical frequency response shall be 200 Hz to 10 kHz P-P, +2, -4 dB and the signal-to-noise ratio shall be 60 dB at 10 μ V. The receiver shall have FCC and WEEE approval and be covered by a five-year parts and labor warranty.* The receiver model shall be the Williams Sound Corp. model PPA R1-216.

*90 days on accessories.

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

ONE 2 ONE™ FM Receiver • Model R1-216



ONE 2 ONE™ FM Receiver • Model R1-216

Contact:

United States

Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344
Ph: 800-328-6190 / 952-943-2252
FAX: 952-943-2174
Email: info@williamssound.com
Web: www.williamssound.com

Canada

Thorvin Electronics
2861 Sherwood Heights Dr. Units 36-37
Oakville, ON L6J-7K1 Canada
Ph: 800-323-6634 / 905-829-3040
FAX: 905-829-4196
Web: www.thorvinelectronics.com

United Kingdom

Sound Associates
Keeble House, 81 Island Farm Road
West Molesey, Surrey KT 2SA
United Kingdom
Ph: (44) 020 8939 5900
Fax: (44) 020 8939 5901
Email: jmurdoch@soundassociates.co.uk
Web: www.soundassociates.com

Asia, Australia, Latin America, Middle East, South Africa

International Sales Department
Williams Sound Corp.
10321 W. 70th Street
Eden Prairie, MN 55344 USA
Phone: +1 952 224 7791 or +1 651 493 2578
Fax: +1 952 943 2174
Email: info@williamssound.com
Web: www.williamssound.com

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>