



15" Gas Cooktop

The patented dual-stacked burner design of Wolf gas cooktops uses its upper-level burner for maximum heat transfer. Merely turn down the knob and the lower-tier burners delivers fine-tuning control and true simmer. The sealed burners and deep recess of the seamless drawn pan make clean up a snap. Wolf gas cooktops are available in natural or LP gas.



*Model IM15G/S multi-function gas cooktop (left).
Model CT15G/S gas cooktop (right).*

FEATURES

- Stainless steel top construction.
- Integrated design allows for installation of multiple cooktops or modules.
- Two dual-stacked, sealed burners with automatic reignition on all settings.
- One medium 12,000 Btu sealed burner with 950 Btu delivered at simmer.
- One small 9,200 Btu sealed burner with 300 Btu delivered at simmer.
- Individual spark ignition system.
- True simmer setting on both burners.
- Illuminated control panel with two-tiered control knobs.
- Low-profile cast iron continuous burner grates with matte porcelain finish.
- Seamless drawn burner pan.

ACCESSORIES

- Filler strip for installation of multiple cooktops or modules.
- Bracket supports for installation of two integrated modules with downdraft.

Accessories are available through your authorized Wolf dealer. For local dealer information, visit the find a showroom section of our website, wolfappliance.com.



Model CT15G/S



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

DUAL-STACKED BURNERS



Melt setting.




Full-flame setting.



15" Gas Cooktop

OVERALL DIMENSIONS

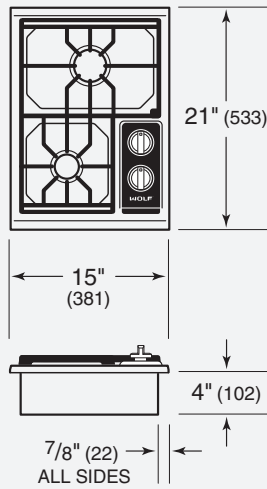


Unit dimensions may vary by $\pm 1/8$ ".

SPECIFICATIONS

Overall Width	15"
Overall Height	4"
Overall Depth	21"
Burner Rating	
(1) 12,000 Btu with 950 Btu delivered at simmer	
(1) 9,200 Btu with 300 Btu delivered at simmer	
Countertop Cut-Out Width	14"
Countertop Cut-Out Depth	19 1/4"
Electrical Requirements	120 V AC, 60 Hz 15 amp circuit
Power Cord	6' cord with grounded plug
Gas Rating	21,200 Btu
Shipping Weight	30 lbs

INSTALLATION SPECIFICATIONS

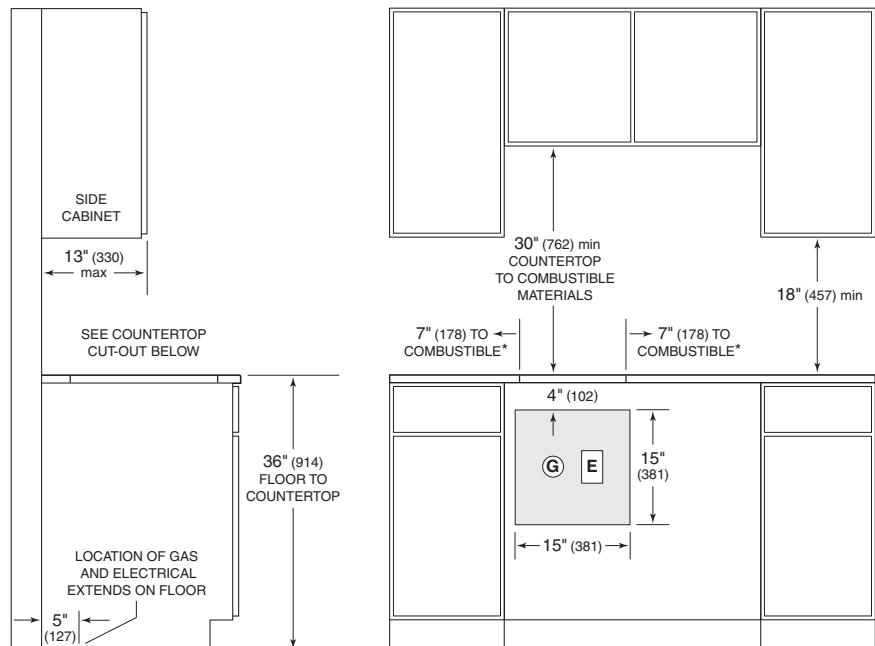

*Minimum clearance from cooktop cut-out to combustible materials up to 18" (457) above countertop.

NOTE: Application shown allows for installation of two 15" (381) modules side by side.


INSTALLATION NOTES

The 15" gas cooktop can be installed in combination with other cooktops or modules.

For LP gas installations above 8,600' a high altitude conversion kit is required.
For natural gas installations above 10,250', contact your authorized Wolf dealer.

Complete installation specifications can be found on our website, wolfappliance.com.

Countertop Cut-Out Dimensions

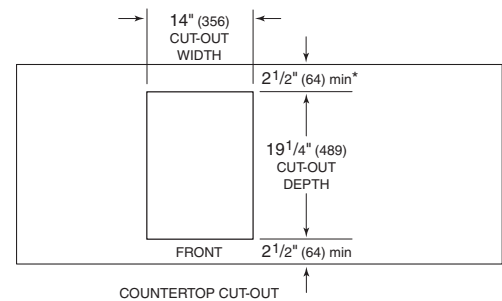

Dimensions in parentheses are in millimeters unless otherwise specified.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>