

CHALLENGER XL[™] SERIES **36" GAS RESTAURANT RANGE OPEN BURNERS / FRY TOPS**



Model C36S-2FT24 shown with optional casters

SPECIFICATIONS

36" wide gas restaurant range, Wolf Model No. C36S-2FT24. Fully MIG welded aluminized steel frame for added durability. Stainless steel front, sides, backriser, highshelf and 6" adjustable legs. Extra deep crumb tray with welded corners. Two 30,000 BTU/hr cast burners with lift-off burner heads. Energy saving flashtube open burner ignition system (one pilot for every two burners) shrouded for reliability. 7/8" thick x 24" wide manual fry top, 40,000 BTU/hr. Heavy duty cast grates, easy lift-off 12" x 12 1/2" in the front and 12" x 14 1/2" in the back to better accommodate stock pots or large pans. Grates have a built in aeration bowl for greater efficiency. Burner knobs are cool to the touch, high temperature material. One oven: 35,000 BTU/hr standard bakers depth ovens with porcelain oven bottom and door panel, measures 26 1/2"d x 26 3/8"w x 14"h. Oven thermostat adjusts from 250°F to 500°F with a low setting. Each oven is supplied with two racks, two rack guide sets, and four rack positions. Oven door is heavy duty with an integrated door hinge/ spring mechanism requiring no adjustment. 3/4" rear gas connection and pressure regulator. Total input 135,000 BTU/hr.

Exterior Dimensions:

34 3/4"d x 36"w x 58"h on 6" adjustable legs



C36S-4FT12 C36C-4FT12 C36B-4FT12

C36C-FT36

- C36C-2FT24 C36B-2FT24
 - C36B-FT36

STANDARD FEATURES

C36S-2FT24

C36S-FT36

- Fully MIG welded frame
- Stainless steel front, sides, backriser, lift-off high shelf
- 6" Stainless steel adjustable legs
- 30,000 BTU/hr open top burners with lift-off heads
- 7/8" thick manual fry top. 4" wide front grease trough
- Shrouded flash tube pilot system (one pilot per two burners)
- Heavy duty cast grates, easy lift-off 12" x 12 1/2" in front and 12" x 14 1/2" in the rear
- Extra deep pull out crumb tray with welded corners
- 35,000 BTU/hr baker's depth standard oven cavity measures 26 1/2"d x 26 3/8"w x 14"h
- Oven thermostat adjusts from 250°F to 500°F
- Two oven racks and four rack positions
- 35,000 BTU/hr Snorkler convection oven in place of std. oven 26"d x 26 1/8"w x 13 7/8"h (115v - 1 phase blower motor 4 amp, 6' cord and plug), includes three oven racks
- One year limited parts and labor warranty

OPTIONAL FEATURES (Factory Installed)

- 6" stainless steel stub back
- Reinforced high shelf for mounting salamander broiler
- Hot top section in lieu of one open burner
- Thermostatically controlled (snap-action) on 24" and 36" only

ACCESSORIES (Packaged & Sold Separately)

- Extra oven rack
- Extra rack guides (set of two)
- Casters (set of four)
- □ Flanged feet (set of four)
- Reinforced high shelf for mounting salamander broiler

This appliance is manufactured for commercial use only and is not intended for home use.

WOLF RANGE COMPAN P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

Vulcan & Wolf Range a division of ITW Food Equipment Group LLC

WOLF

CHALLENGER XL[™] SERIES 36" GAS RESTAURANT RANGE OPEN BURNERS / FRY TOPS


INSTALLATION INSTRUCTIONS

- 1. A pressure regulator sized for this unit is included. Natural gas 5.0" W.C., propane gas 10.0" W.C.
- 2. Gas line connecting to range must be 3/4" or larger. If flexible connectors are used, the inside diameter must be 3/4" or larger.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269, www.NFPA.org. When writing, refer to NFPA No. 96.
- These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Copies may be obtained from The American Gas Association, 400 N Capitol St. NW, Washington, DC 20001, www.AGA.org.

- 5. <u>Clearances</u> Combustible 6" <u>Standard Oven Non-combustible</u> 0" 0" Convection Oven Non-combustible Min. 4" 0"
- 6. For proper combustion, install equipment on adjustable legs or casters provided with unit.
- 7. For proper combustion, install equipment on adjustable legs or casters provided with unit.

NOTE: In line with its policy to continually improve its product, Wolf Range Company reserves the right to change materials and specifications without notice.

Specify type of gas when ordering. Specify altitude when above 2,000 feet.

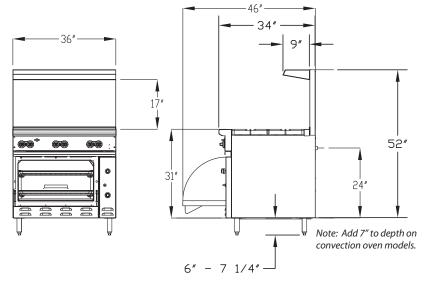

TOP CONFIGURATION	MODEL NUMBER	DESCRIPTION	TOTAL INPUT BTU / HR	SHIPPING WEIGHT LBS / KG
	C36S-4FT12	4 Open Burners / 12" Fry Top /1 Standard Oven	175,000	560 / 254
	C36C-4FT12	4 Open Burners / 12" Fry Top / 1 Convection Oven	175,000	620 / 281
	C36B-4FT12	4 Open Burners / 12" Fry Top / Storage Base	140,000	530 / 240
	C36S-2FT24	2 Open Burners / 24" Fry Top / 1 Standard Oven	135,000	570 / 259
	C36C-2FT24	2 Open Burners / 24" Fry Top / 1 Convection Oven	135,000	630 / 286
	C36B-2FT24	2 Open Burners / 24" Fry Top / Storage Base	100,000	540 / 245
	C36S-FT36	36" Fry Top / 1 Standard Oven	95,000	610 / 277
	C36C-FT36	36" Fry Top / 1 Convection Oven	95,000	660 / 299
	C36B-FT36	36" Fry Top / Storage Base	60,000	580 / 263

WOLF RANGE COMPANY

Vulcan & Wolf Range a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com