



Cooktop Low-Profile Wall Hoods

Behind the contemporary lines of the new Wolf cooktop low-profile hoods, there's a lot of hard-nosed functional thinking. Brilliant halogen lighting illuminates your cooking surface. Powerful multi-speed blowers whisk away smoke and odors. Available in three widths, low-profile wall hoods are classic stainless steel with a black glass front panel and are recommended for use with Wolf induction, electric and gas cooktops and integrated modules.



Features

- Heavy-duty stainless steel construction with classic stainless steel finish.
- Telescopic flue fits 8' to 9' ceilings.
- Front-mounted electronic controls with digital indicator and four-speed blower control.
- Sealed halogen lighting with three settings.
- Internal, in-line and remote blower options.
- Internal blower (I) models can be used in a non-ducted application using an accessory charcoal recirculating filter.
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed.
- Delay-off mode automatically turns unit off.
- Stainless steel filter cover with dishwasher-safe aluminum mesh filter.
- Filter clean indicator lets you know when the filter needs cleaning.
- Transition with backdraft damper included.

Model Options

Model	CTEWH30I	CTEWH36	CTEWH36I	CTEWH45	CTEWH45I
Overall Width	30"	36"	36"	45"	45"
500 CFM Internal Blower Included	■		■		■

Accessories

- 30" high classic stainless steel wall shield in 30" and 36" widths (not available in 45" width)
- Recirculating kit for non-ducted installations
- Replacement charcoal filters

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the showroom locator section of our website, wolfappliance.com.




Model CTEWH36
Cooktop Low-Profile Wall Hood

Blower Options

- 500 CFM internal blower
- 600 or 1100 CFM in-line blower
- 600, 900, 1200 or 1500 CFM remote blower

(I) models include the 500 CFM internal blower. An in-line or remote blower is required for models CTEWH36 and CTEWH45. For blower recommendations, visit our website, wolfappliance.com.



Sealed Halogen Lighting




Electronic Controls



Cooktop Low-Profile Wall Hoods

Overall Dimensions

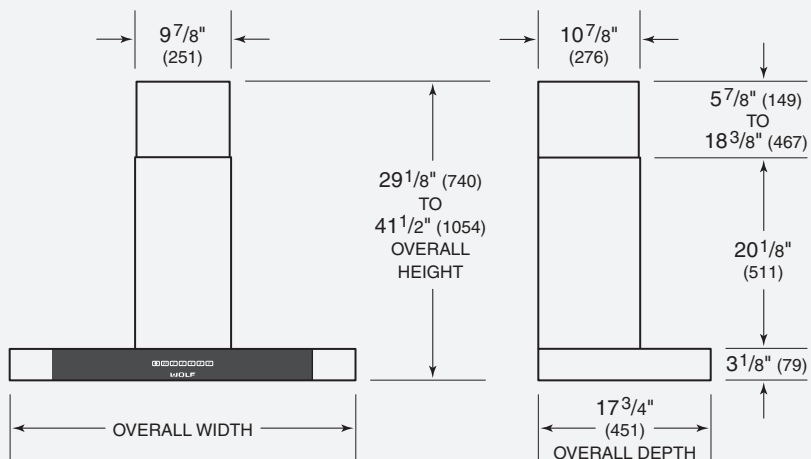


Unit dimensions may vary by $\pm 1/8$ ".

Specifications

Exterior Finish	Classic Stainless Steel
Overall Widths	30", 36" and 45"
Height (excluding chimney)	$3\frac{1}{8}$ "
Min Height (including chimney)	$29\frac{1}{8}$ "
Max Height (full extension)	$41\frac{1}{2}$ "
Overall Depth	$17\frac{3}{4}$ "
Bottom of Hood to Countertop	24" to 30"
Discharge	Vertical
Duct Size	6" Round
Electrical Requirements	110/120 V AC 60 Hz, 15 amp dedicated circuit
Shipping Weight	51–63 lbs

Installation Specifications

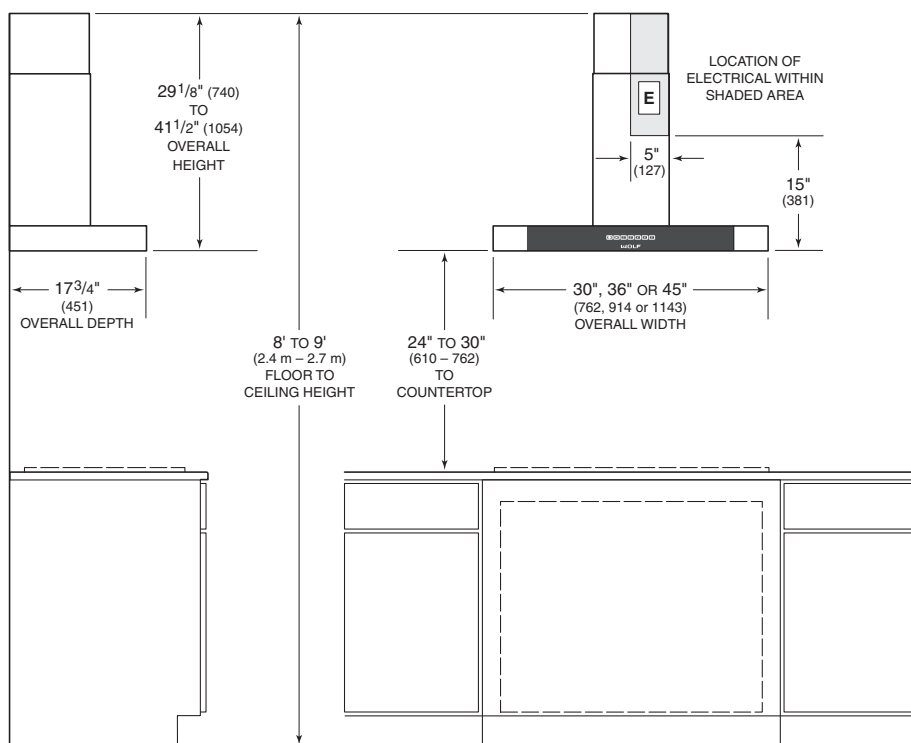

Installation Notes

(I) models include a 500 CFM internal blower. An in-line or remote blower is required for models CTEWH36 and CTEWH45. For blower recommendations, visit our website, wolfappliance.com.

Cooktop low-profile hoods are recommended for use with Wolf induction, electric and gas cooktops and integrated modules. For Wolf ranges and rangetops, a pro ventilation hood is recommended.

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>