

RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements. The main benefit of this innovative new range is total flexibility: you have the possibility to compose your table to your exact personal requirements. You can order each individual unit and combine them together: structure, top, door, drawer and refrigeration unit. We offer a basic range of 38 models but the choice is infinite. The range presented here consists of 3 models with a temperature from -13° to -22°C. Models are available with 2 doors: 1 basic model; 1 with rear upstand; and 1 with remote refrigeration unit.



113177

PT 3 SERIES

FREEZER TABLES 1300 ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in AISI 304 stainless steel with satin finish and polished interior guaranteeing maximum reliability. 2" height-adjustable AISI 304 stainless steel feet (-15 to +80 mm). Completely removable grid support structure in AISI 304 stainless steel.
- ◆ The worktop has a height of 50 mm and is slotted into place for easy removal.
- ◆ High-density expanded polyurethane foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.
- ◆ The design of the refrigeration unit allows maximum usage of the available space in the compartment. It is also mounted on a pull-out system to facilitate maintenance and cleaning (Models TRF132A and TRFA132A).
- ◆ The new central position of the refrigeration unit allows perfect air circulation in the different compartments and temperature uniformity (Models TRF132A and TRFA132A).
- ◆ These appliances are suitable for use in tropical climates (+43°C) ensuring high performance even in extreme ambient conditions.

| CHARACTERISTICS | MODELS | | |
|------------------------------------|-------------------|--------------------|--------------------|
| | TRF132A 113177 | TRFA132A 113178 | TRRF132A 113179 |
| Operating temperature - min/max °C | -22/-15 | -22/-15 | -22/-15 |
| Operating mode | Ventilated | Ventilated | Ventilated |
| Gross capacity (D.I.N. 8952) - l. | 290 | 291 | 291 |
| External dimensions - mm | | | |
| width | 1274 | 1274 | 1274 |
| depth/with open doors | 700, 1110 | 700, 1110 | 700, 1110 |
| height | 850 | 950 | 850 |
| Internal dimensions - mm | | | |
| depth | 580 | 580 | 580 |
| height | 530 | 530 | 530 |
| N° and type of door | 2 | 2 | 2 |
| Door hinges | 1 Left+1 Right | 1 Left+1 Right | 1 Left+1 Right |
| N° and type of grids (included) | 2, GN 1/1 | 2, GN 1/1 | 2, GN 1/1 |
| Compressor power - HP | 3/4 | 3/4 | |
| N° defrost in 24 hrs. | 4/16' | 4/16' | 4/16' |
| Refrigerant type | R404a | R404a | R404a |
| Refrigerant quantity - g. | 280 | 280 | |
| Refrigeration power - W | 925 | 925 | |
| Power - kW | | | |
| installed-electric | 0.75 | 0.75 | 0.078 |
| Noise level - dBA | 58 | 58 | |
| Net weight - kg. | 129 | 130 | 115 |
| Power supply - V, phases, Hz | 230 V, 1N, 50 | 230 V, 1N, 50 | 230 V, 1N, 50 |
| INCLUDED ACCESSORIES | | | |
| 1/1 GN GREY "RILSAN" GRID | 2 | 2 | 2 |

- ◆ The base, with water drain, is pressed and features rounded internal corners to guarantee perfect cleaning.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas.
- ◆ The refrigerated tables feature: reversible, self-closing doors; recessed ergonomical handles.


- ◆ Model TRRF132A is designed for use with remote refrigeration units which means that the removal of a source of heat from the working environment solves problems of high temperatures or inadequately ventilated rooms. The remote refrigeration units are supplied with a control box that includes: a thermostatic valve, evaporator and a control panel. It is possible to have each refrigerated table connected to a specific remote refrigeration unit or to connect several appliances to a central refrigeration plant.

- ◆ The model with remote refrigeration unit is supplied as standard with an ambient drawer, 100 mm in height, above the refrigeration unit.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

| ACCESSORIES | MODELS | | |
|--|-------------------|--------------------|--------------------|
| | TRF132A 113177 | TRFA132A 113178 | TRRF132A 113179 |
| 1/1 GN GREY "RILSAN" GRID | 881435 | 881435 | 881435 |
| 2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES | 880539 | 880539 | 880539 |
| HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX) | 880119 | 880119 | 880119 |
| HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX) | 880132 | 880132 | 880132 |
| HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX) | 880133 | 880133 | 880133 |
| KIT HACCP EKIS | 922166 | 922166 | 922166 |
| LOCK FOR REFRIGERATED COUNTERS | 881499 | 881499 | 881499 |
| PLASTIC CONTAINER GN 1/1 H=100 MM | 811451 | 811451 | 811451 |
| PLASTIC CONTAINER GN 1/1 H=150 MM | 881040 | 881040 | 881040 |
| PLASTIC CONTAINER GN 1/1 H=65 MM | 881038 | 881038 | 881038 |
| PRINTER FOR HACCP BASIC VERSION REFRIG. | 881457 | 881457 | 881457 |
| REMOTE UNIT -24-15°C FOR 550/650 LT | | | 881465 |




www.zanussiprofessional.com

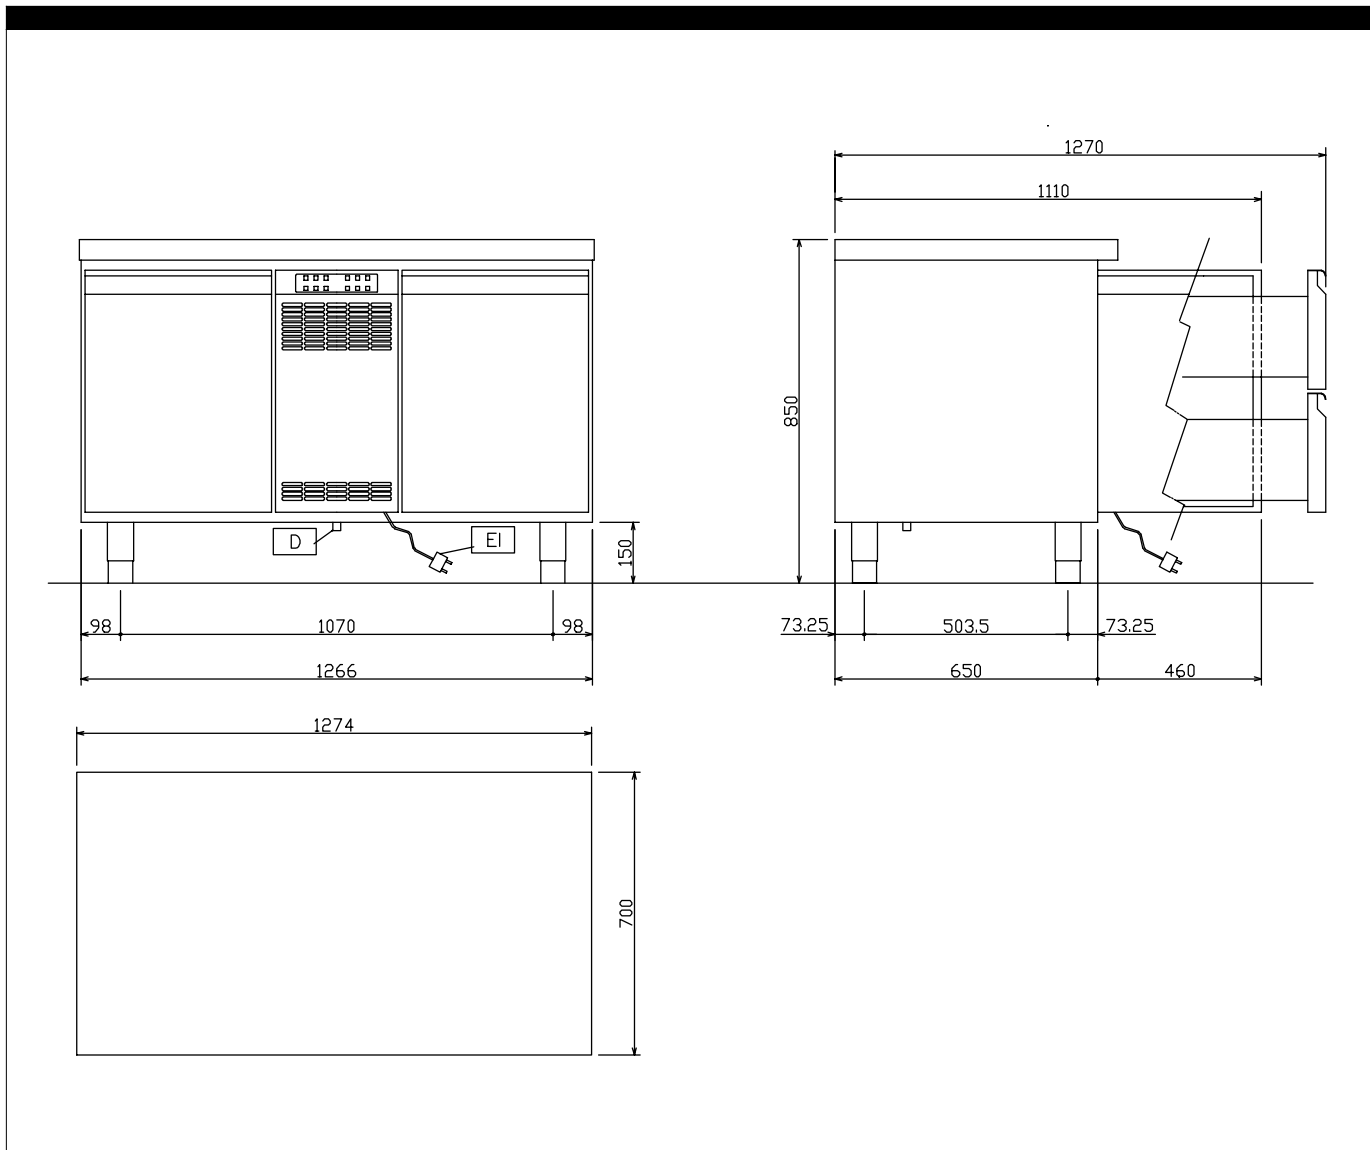

| | TRF132A 113177 | TRRF132A 113179 |
|----------------------------|-------------------|--------------------|
| D - Water drain | 16mm | 16mm |
| EI - Electrical connection | 230 V, 1N, 50 | 230 V, 1N, 50 |



www.zanussiprofessional.com

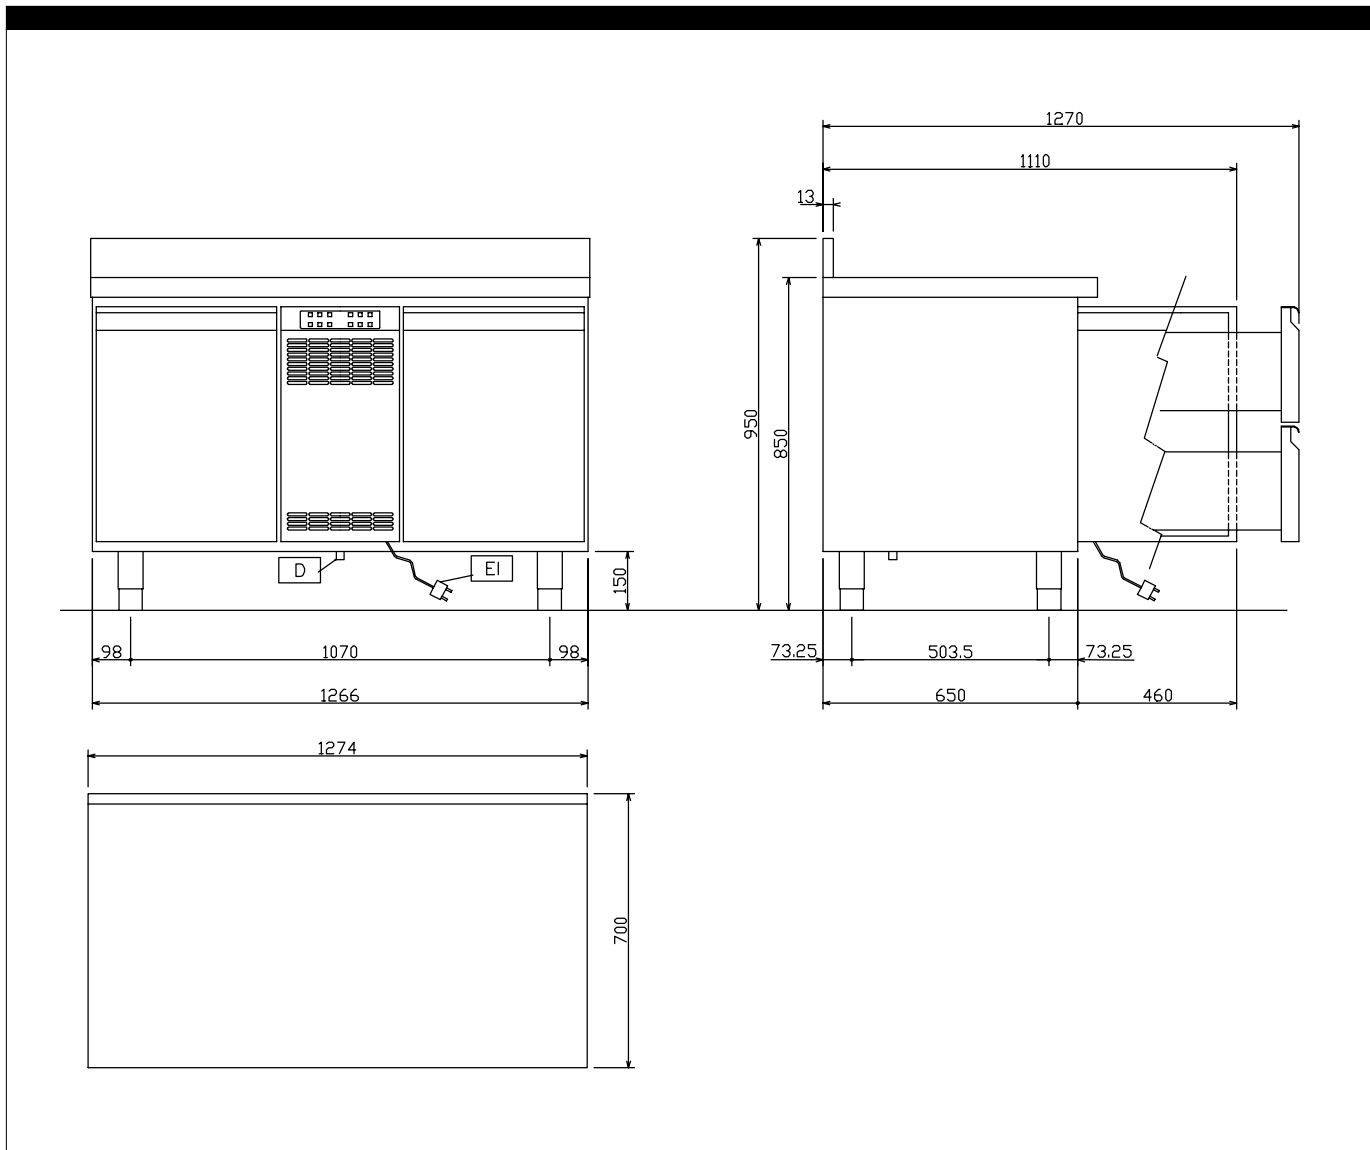

| | |
|----------------------------|----------------------------|
| | TRFA132A 113178 |
| D - Water drain | 16mm |
| EI - Electrical connection | 230 V, 1N, 50 |



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>