

RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer. The models detailed on this sheet are 2 electric ranges with 4 hot plates on an electric oven.



Model 200109

N 900

ELECTRIC RANGES **ZANUSSI** PROFESSIONAL



FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Cast-iron hot plates hermetically sealed to the one-piece top, with safety thermostat.
- ◆ Hot plates with a power of 4 kW.
- ◆ Electric oven with separate thermostats for top and bottom elements and butterfly valve. Oven thermostat with temperature markings in °C adjustable from 110° to 285°C and power of 6 KW.
- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ All models have right-angled side edges to allow flush-fitting joins between units, eliminating gaps and possible dirt traps.
- ◆ Stainless steel oven chamber with 3 levels of runners to accommodate 2/1GN shelves; ribbed, cast-iron oven base plate.
- ◆ Inside door panel in stainless steel.
- ◆ Stainless steel feet adjustables up to a height of 50 mm.

- ◆ Handles on the base cupboard and oven in stainless steel.
- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ Main connections can be via the base of the unit.

- ◆ All models provided with service duct to ease installation.
- ◆ All models can be installed on cantilever system.
- ◆ IPX5 water protection.

TECHNICAL DATA		
CHARACTERISTICS	MODELS	
	NCFE800 200109	NCFE8002 200112
Power supply	Electric	Electric
External dimensions - mm		
width	800	800
depth	900	900
height	850	850
height adjustment	50	50
Oven cavity - mm		
width	575	575
depth	700	700
height	300	300
Oven		
heat input - kW	6	6
temperature min-max - °C	110, 285	110, 285
Back plate dimensions - mm	300x300, 300x300	300x300, 300x300
Back plates power - kW	4, 4	4, 4
Front plates dimension - mm	300x300, 300x300	300x300, 300x300
Front plates power - kW	4, 4	4, 4
Total Power - kW	22	22
Net weight - kg.	145	145
Supply voltage	400 V, 3N, 50/60	230 V, 3, 50/60
INCLUDED ACCESSORIES		
2/1 GN CHROME GRID	1	1

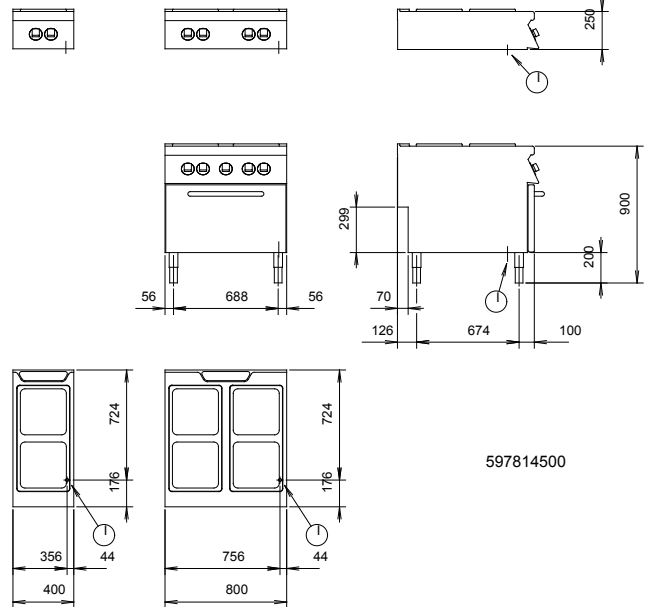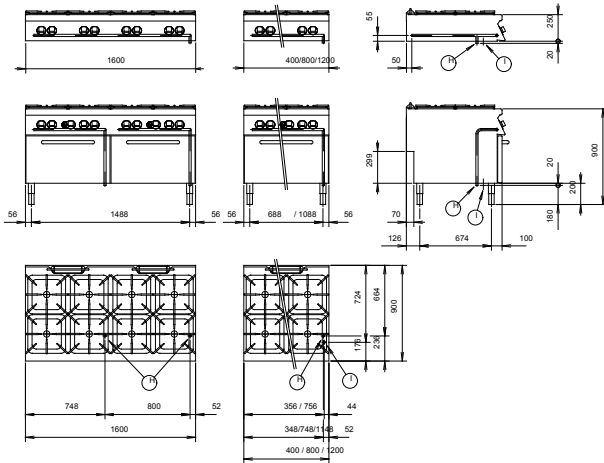

597814500

LEGEND

	NCFE800 200109	NCFE8002 200112
I - Electrical connection	400 V, 3N, 50/60	230 V, 3, 50/60

OPTIONAL ACCESSORIES

ACCESSORIES	MODELS	
	NCFE800 200109	NCFE8002 200112
2 CAST IRON PLATE BARS FOR EL. COOK. TOP	206056	206056
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181
2 SIDE COVERING PANELS FOR TOP-D=900MM	206278	206278
2 SIDE COVERING PANELS H=700 D=900	206134	206134
2 SIDE KICKING STRIPS	206180	206180
2 SIDE KICKING STRIPS F. CONCRETE INSTAL.	206157	206157
2/1 GN CHROME GRID	164250	164250
4 FEET FOR CONCRETE INSTALLATION	206210	206210
4 WHEELS (2 WITH BRAKE)	206188	206188
CHIMNEY UPSTAND 800MM	206304	206304
DRAUGHT DIVERTER WITH 120 MM DIAMETER	206126	206126
FLANGED FEET KIT	206136	206136
FLUE CONDENSER FOR 1/2 MOD. DIAM. 120MM	206155	206155
FRONT.KICK.STRIP F. CONCRETE INST. 1000 MM	206150	206150
FRONT.KICK.STRIP F. CONCRETE INST. 1200 MM	206151	206151
FRONT.KICK.STRIP F. CONCRETE INST. 1600 MM	206152	206152
FRONT.KICK.STRIP F. CONCRETE INST. 200 MM	206146	206146
FRONT.KICK.STRIP F. CONCRETE INST. 400 MM	206147	206147
FRONT.KICK.STRIP F. CONCRETE INST. 800 MM	206148	206148
FRONTAL HANDRAIL 1200 MM	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167
FRONTAL KICKING STRIP 1000 MM	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179
FRONTAL KICKING STRIP 200 MM	206174	206174
FRONTAL KICKING STRIP 400 MM	206175	206175
FRONTAL KICKING STRIP 800 MM	206176	206176
JUNCTION SEALING KIT	206086	206086
LARGE HANDRAIL(PORIONING SHELF)400 MM	206185	206185
LARGE HANDRAIL(PORIONING SHELF)800 MM	206186	206186
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234	206234
REAR FLUE UPSTAND FOR SMALL CHIMNEY	206159	206159
SIDE HANDRAIL-RIGHT/LEFT HAND	206165	206165
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137
WATER COLUMN EXTENSION FOR 900 LINE	206290	206290
WATER COLUMN WITH SWIVEL ARM	206288	206288



www.zanussiprofessional.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>