

The following instructions apply to recirculating kit part numbers ZRC-0000, ZRC-0001, ZRC-0002, ZRC-0003, ZRC-0010, ZRC-0070 and ZRC-0080.


Charcoal filters are not meant to be cleaned. Do not place charcoal filters in the dishwasher or soak them in soapy water. Under normal usage (1 hour per day) filters should be replaced every 3 - 4 months. Charcoal filters may need to be replaced more frequently depending on cooking style.



1. Install metal bracket* onto metal filter from hood by sliding one end of the metal bracket underneath the backside of the gray handle as shown.



2. Push two corner tabs into metal filter frame to lock them in. If pushing tabs is difficult, gently lift up on the corner lip of the bracket near the gray handle and push down on the corner tab. **(Fig.1)**

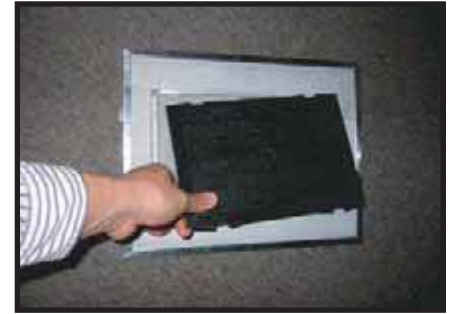

3. Install charcoal filter onto metal bracket with plastic side up. Insert bottom side of carbon filter where the tab cut-outs are first. **(Fig.2)**



4. Push charcoal filter down until it clicks, locking tabs in place.



5. Installation complete. Install metal filter into range hood.

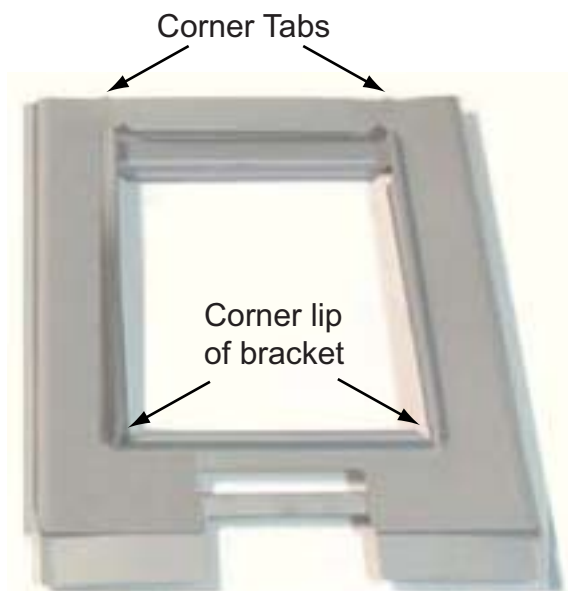


Fig. 1



Fig. 2

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>