

10dBi yagi antenna



The NXA-WAP2410A 10dBi yagi antenna can be used as a bridge between two networks or for point-to-point communications. They are field adjustable for vertical or horizontal polarization with matched principal plane beamwidths for optimum performance in either orientation. This design also provides improved front-to-back ratio and sidelobe suppression that reduces interference. All models feature a robust mounting structure for consistent performance regardless of weather conditions.

- Field adjustable to allow vertical or horizontal polarity. Eliminates co-channel interference from neighboring radiators. Polarity markings molded on the antenna ensure installation in the correct orientation.
- Optional, articulating mount. Allows precise adjustment of the antenna both vertically and horizontally.
- All antennas include a robust mast mount bracket designed to withstand 125 mph wind.
- Matched principal plane beamwidths with excellent sidelobe suppression and cross-polarization rejection of more than 20 dB. Provides superior signal quality with enhanced gain performance and minimal interference from neighboring radiators.
- 23 dB front-to-back ratio permits less physical separation on the tower thus adding mounting flexibility at installation sites where space is limited.
- Attractive weather-proof radome constructed of UV resistant material. Provides robust and trouble-free use in harsh outdoor environments.



10dBi yagi antenna

NXA-WAP2410A (FG2255-22)

GENERAL SPECIFICATIONS:

- 2.4 GHz ISM enclosed yagi antenna series

POLARIZATION:

- Vertical or horizontal, linear (user adjustable)

NOMINAL IMPEDANCE:

- 50 Ohms

MOUNTING:

- Heavy duty yagi mounting bracket (included) permits mast mounting on masts up to 2" O.D. MYK18 adjustable wall/pipe mount allows 180° (included angle) azimuth and elevation adjustment (sold separately).

MECHANICAL SPECIFICATIONS:

WIND SURVIVAL:

- 125 mph

LATERAL THRUST AT RATED WIND:

- 5.8 lbs.

EQUIVALENT FLAT PLATE AREA:

- 0.060 ft²

CABLE:

- 3' (914.4mm) coax

LENGTH:

- 4.5" L x 3" OD
(114mm L x 76mm OD)

WEIGHT:

- 1 lbs (0.5 kg)

ELECTRICAL SPECIFICATIONS:

FREQUENCY RANGE:

- 2400-2485 MHz

NORMAL GAIN:

- 10 dBi

HORIZONTAL BEAMWIDTH:

- 55°

VERTICAL BEAMWIDTH:

- 55°

VSWR:


- < 1.5:1

FRONT-TO-BACK RATIO:


- 23 dB

MAXIMUM POWER:

- 5 Watts

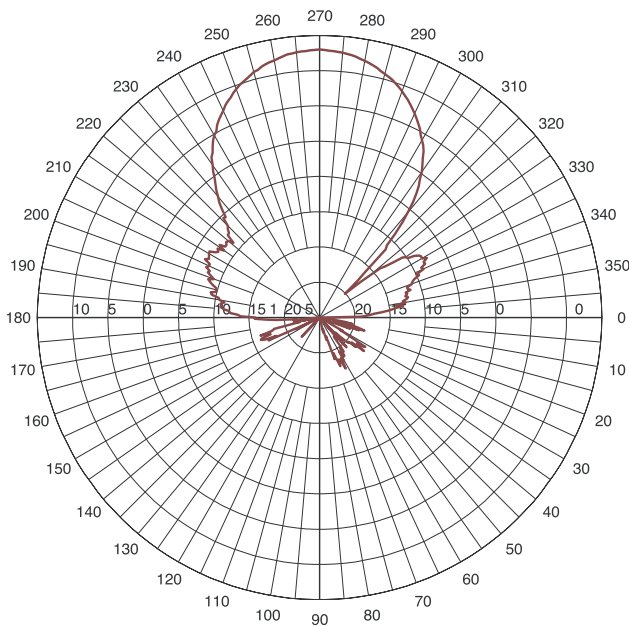

NXA-WAP2410A Elevation Cut

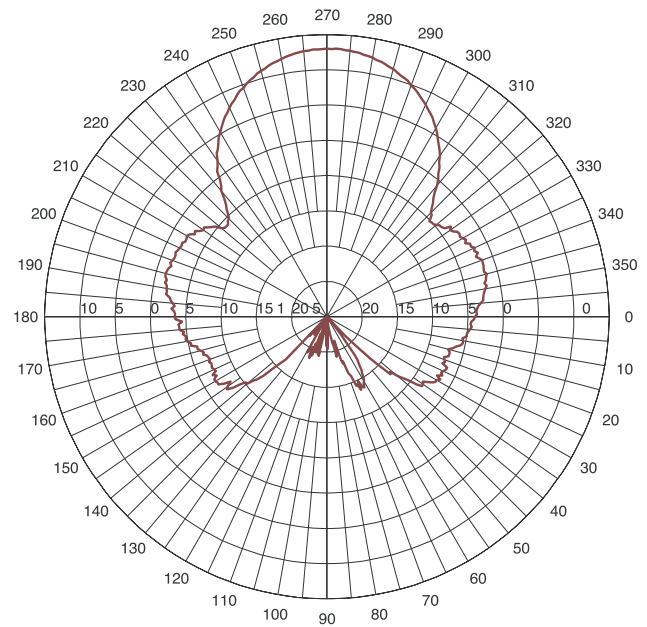

NXA-WAP2410A Azimuth Cut



IT'S YOUR WORLD. TAKE CONTROL.

ARGENTINA • AUSTRALIA • BELGIUM • BRAZIL • CANADA • CHINA • ENGLAND • FRANCE • GERMANY • GREECE • HONG KONG • INDIA • INDONESIA • ITALY • JAPAN
LEBANON • MALAYSIA • MEXICO • NETHERLANDS • NEW ZEALAND • PHILIPPINES • PORTUGAL • RUSSIA • SINGAPORE • SPAIN • SWITZERLAND • THAILAND • TURKEY • USA
ATLANTA • BOSTON • CHICAGO • CLEVELAND • DALLAS • DENVER • INDIANAPOLIS • LOS ANGELES • MINNEAPOLIS • PHILADELPHIA • PHOENIX • PORTLAND • SPOKANE • TAMPA
3000 RESEARCH DRIVE, RICHARDSON, TX 75082 • 800.222.0193 • 469.624.8000 • +1.469.624.7400 • 469.624.7153 fax • www.amx.com

© 2006 AMX. All rights reserved. AMX and the AMX logo are all trademarks of AMX. AMX reserves the right to alter specifications without notice at any time.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>