

TOSHIBA AMERICA INFORMATION SYSTEMS STORAGE DEVICE DIVISION IRVINE, CALIFORNIA

SD-R6012

DVD REWRITEABLE MOBILE DRIVE

USER MANUAL

TOSHIBA

CONTENTS

Introduction	1
Setup	3
Using the DVD Rewriteable Drive	4
Troubleshooting	6
Specifications	7
Drive Connectors	11



INTRODUCTION – SD-R6012

General Features

Reads and records digital data on DVD-R/-RW and CD-R/-RW discs

CD-R/-RW disc write/rewrite at 16X/10X DVD-R/-RW disc write/rewrite at 1X/1X

3-way Disc Eject (eject button, software, emergency eject hole)

Average Random Access Time

CD	95ms
DVD-ROM	105ms
DVD-RAM	170ms

Horizontal or Vertical Mount

2MByte Buffer

Playback interchangeability for CD-ROM and DVD-ROM discs

Regionalization (RPC2 compliance) (DVD)

BUS Interface ATAPI

Types of Disc Formats Supported - Write

Applicable Write Format

DVD-R	Disc at once, incremental write
DVD-RW	Disc at once, incremental write, restricted overwrite
CD-R/-RW	Disc at once, Track at once, Session at once, Packet write

Applicable Write disc

DVD-RDVD-R (Ver 2.1 for General)DVD-RWDVD-RW (Ver 1.1)CD-R/-RWCD-DA, CD+(E)G, CD-MIDI, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-IBridge (Photo-CD, Video-CD), Multi-session CD (Photo-CD, CD-EXTRA, Portfolio)

Types of Disc Formats Supported - Read

DVD:


DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18) DVD-R (Ver 1.0 & Ver. 2.0) DVD-RW (Ver 1.1, 1.2)

CD:

CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, CD-I, CD-I Bridge (Photo-CD, Video-CD), Multi-session (Photo-CD, CD-EXTRA, CD-R, CD-RW, Portfolio), CD-R, CD-RW

Front Panel

Figure 1.SD-R6012 DVD Writeable Drive Front Panel

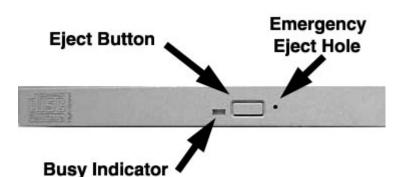

Loading Load disc using tray.

Busy The LED lights green or amber when the drive is operating (LED is amber when drive is writing.)

Eject The Eject button is used to open the disc tray so you can install or remove a disc.

Button

Tray

Emergency The emergency eject hole is to be used only when the Loading Tray will not open when Eject Hole Eject button is pressed.

TOSHIBA

SETUP – SD-R6012

Toshiba recommends that only trained professionals install this DVD Rewriteable drive into your laptop/notebook.

Installation Notes

- The SD-R6012 DVD Rewriteable drive has no jumpers that need to be set
- Mounting orientation: 15⁰ (horizontally), 15⁰ vertically (volume control in down position), 30° (drive with volume control in up position).
- When mounting drive use 4 M2-PO.4 tapping holes located on the left and right sides of drive.
- When mounting drive, the tightening torque of the four screws must be even. Recommended screw tightening torque is 2N
- For clearance around the front bezel, it is recommended that a clearance of more than 0.8mm should be left in all directions.

Software Driver

Toshiba's SD-R6012 drive does not require any unique device drivers for Windows '98/2000/XP/NT. After installing your drive and re-booting, your system should recognize your drive. Win '98/2000/XP/NT Operating Systems support all Toshiba's ATAPI drives natively. If you prefer using DOS, download the ATAPI driver from our web site.




USING THE DVD Rewriteable Drive – SD-R6012

Drive Operation

Inserting Media

To insert media perform the following steps:

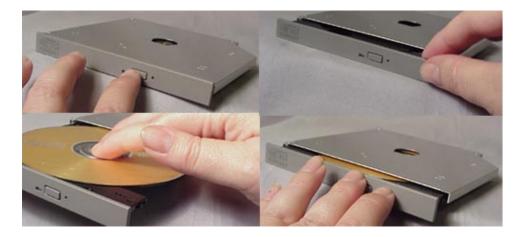

1. Figure 1.Inserting Disc

- 1. Open the drive's loading tray by pressing the Eject Button and pulling out the tray.
- 2. Place media disc into drive's loading tray, and lightly press down on the inner portion of the disc.
- 3. Gently close the disc tray.

Removing Media

To remove media disc from the drive, perform the following steps:

- 1. Open the loading tray by pressing the Eject Button, and pulling tray out.
- 2. Grasp disc by it's outer edge, and lift out of loading tray.
- 3. Gently close the loading tray.

Usage Guidelines

- Keep the disc tray closed when not using the DVD Rewriteable drive
- Do not press down on the disc tray when opening or closing it.
- Do not place objects on the disc tray
- Never use a damaged, broken, or deformed disc
- Do not press the Eject button while the drive is accessing a disc

Emergency Ejection



CAUTION: The following procedure is intended only as a last resort when pressing the eject button fails to open the Loading Tray.

- 1. Turn computer power OFF by properly shutting down system.
- 2. Insert a solid bar (i.e. large paper clip) into Emergency Eject hole and push in as shown in the picture below.
- 3. Loading tray will open/eject.

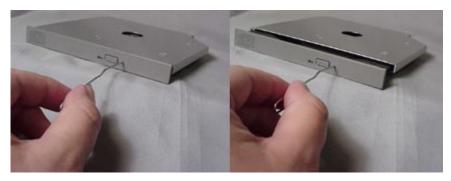


Figure 2.Using Emergency Eject

Handling Media

CD/DVD media is sensitive to dust and fingerprints. Carefully handle media by its edges only.

Cleaning Media

Try to avoid touching the read area (underside) of the disc as dirt and smears will degrade the disc accessing speed.

If the disc becomes dirty wipe it with a damp soft cloth. Avoid cleaning in a circular motion, but rather from the inner side outward.

NOTE: High-speed drives spin the disc at a high rotational speed. If a disc has printing on only half of the disc, or if there is a slight imbalance in the disc, the imbalance is greatly magnified by the high speed, causing the drive to vibrate or produce a fan-like noise. These effects are inherent in the high-speed technology and do not indicate a problem with the drive.

TOSHIBA

TROUBLESHOOTING – SD-R6012

Problem	Solution			
Disc tray cannot be opened	 Check that there is power to drive. Use Emergency Eject instructions to open tray. 			
Drive is not recognized by system	 Is the drive connected properly? Are all cables plugged in properly (e.g. Power Cable, Interface Cable and Audio Cables). Is the software driver loaded? On a step-by-step (F8) Boot of the system is the DVD Rewriteable drive recognized? (BIOS / DOS reports "device driver not found" or "no valid drivers selected."). If not, Contact Technical Support. Has the DVD Rewriteable drive software driver been corrupted by a virus. Run a Virus Scan program and repair if possible. Contact Technical Support if the Virus renders the DVD Rewriteable drive software drive software drive software driver been corrupted by a virus. 			
Drive is not recognized by system during Boot process, but is recognized by the Operating System (i.e. XP, Win2000, Win98, Win NT, etc.)	 Is the DVD Rewriteable drive software driver loaded? On a step-by-step (F8) Boot of the system is the DVD Rewriteable drive recognized? (BIOS / DOS reports "device driver not found" or "no valid DVD drivers selected."). If not, Contact Technical Support. Has the Windows DVD Rewriteable drive software driver program been corrupted by a virus. Run a Virus Scan program and repair if possible. Contact Technical Support if the Virus renders the software drivers not useable. 			
BUSY Indicator LED flashes slowly	 The disc may be dirty Clean it with a soft damp cloth. Avoid cleaning the disc using a circular motion. The disc should be wiped in a radial direction. That is, from the inner side outward. The laser lens may have become cloudy or blocked by particulate matter. Please contact Technical Support. 			
BUSY Indicator LED is constantly ON	Possible Hardware Problem. Please contact Technical Support.			
DVD-ROM can not play a DVD in the drive or certain types of CD media (i.e. CD-plus, etc.)	 Is the DVD Rewriteable drive driver loaded Is the DVD disc the correct format for the type of system that you are using? (i.e. on a PC an ISO9660 IBM compatible PC format as opposed to Apple/Mac HFS disc or UNIX disc formats which will not function). Do you have the correct software applications program/drivers installed to run a DVD disc? Has the Windows DVD Rewriteable drive software driver program been corrupted by a virus. Run a Virus Scan program and repair if possible. Contact Technical Support if the Virus renders the software drivers not useable. 			



SPECIFICATIONS – SD-R6012

General

Interface: ATAPI

Applicable Write Format

DVD-R	Disc at once, Incremental write
DVD-RW	Disc at once, Incremental write, Restricted overwrite
CD-R/-RW	Disc at once, Track at once, Session at once, Packet write

Applicable Write disc

DVD-R	DVD-R (Ver 2.0 for General)
DVD-RW	DVD-RW (Ver1.1)
CD-R/-RW,	CD-DA, CD+(E)G, CD-MIDI, CD-ROM, CD-ROM XA, CD-I, MIXED MODE CD, CD-I Bridge (Photo-CD, Video-CD), Multi-session CD (Photo-CD, CD-Extra, Portfolio)

Applicable Read Formats:

DVD	DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R (Ver. 1. & Ver 2.0) DVD-RW (Ver. 1.0, Ver. 1.1) DVD-RAM (Ver. 2.1)
CD	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, CD-I, CD-I Bridge (Photo-CD, Video-CD), Multi-session (Photo CD, CD-Extra, CD-R, CD-RW, Portfolio), CD-RW, CD-R



Note: All DVD/CD formats, except CD-Red Book (audio), require additional application specific software and/or hardware. The drive is capable of reading these data formats. However, in order to run applications that use these formats, you must first have the required software and/or hardware.

Data Disc Capacities

DVD-ROM	4.377GB (DVD-5)
	7.959GB (DVD-9)
	8.754GB (DVD-10)
	15.917GB (DVD-18)
DVD-R (Ver 1)	3.679GB
DVD-R (Ver 2.1)	4.377GB
DVD-RW (Ver. 1.1)	4.377GB
DVD-RAM (Ver 2.1)	4.377GB
CD	656.5MB (mode 1)
	748.8MB (mode 2)

Performance

Rotational Speed

DVD-ROM (single layer) 4,670rpm (3.3 - 8X CAV) DVD-ROM (dual layer) 3,792rpm (2.5 - 6X CAV) DVD-R (Ver. 1.0) 2,560rpm (1.7 – 4X CAV) DVD-R (Ver. 2.1) 2,224rpm (1.7 – 4X CAV) 2,224rpm (1.7 - 4X CAV) DVD-RW (Ver 1.1) DVD-video (CSS-Disc) 1,111rpm (1.7 – 4X CAV) 1,380 - 3,300rpm (1X ZCLV) DVD-RAM (Ver 2.1) DVD-RAM (Ver 1.0) 2,160 - 4,800rpm (2X ZCLV) DVD-R (Ver 2.0) (Write) 570 – 1,390rpm (1X CLV) DVD-RW (Ver 1.1) (Write) 550 - 1,390rpm (1X CLV) CD-ROM, CD-R 5,100rpm (10.3 - 24X CAV) 2,560 - 4,300rpm (8 - 12X CAV) CD-RW **CD-DA** Transfer 2,560 - 4,300rpm (8 - 12X CAV) 1,200 - 2,000rpm (4 - 6X PCAV) CD-DA, Video-CD CD-R (Write) 2,648 – 3,960rpm (8/12/16X ZCLV) 2,568 - 3,973rpm (8/12X ZCLV) 1,700 - 3,960rpm (8X CLV) 850 - 1,980rpm (4X CLV) High Speed CD-RW (Write) 2,125 - 4,950rpm (10X CLV) 850 - 1,980rpm (4X CLV) CD-RW (Write) 850 - 1,980rpm (4X CLV) **Transfer Rate** DVD (Single) 4,416 - 10,816KB/second 3,375 - 8,100KB/second

DVD (Dual) DVD-Video (CSS Disc) DVD-R, DVD-RW DVD-RAM (Ver 1.0) DVD-RAM (Ver 2.1) CD

CD-RW

Random Access Time DVD CD DVD-RAM

105ms 95ms 170ms

Data Error Rate DVD-ROM CD-ROM

10⁻¹⁵ Max 10⁻¹⁵ Max (Mode 1) 10⁻¹² Max (Mode 2)

2,160 - 5,400KB/second

2,160-5,400KB/second

1,545 – 3,600KB/second (mode 1) 1,761 – 4,104KB/second (mode 2) 600 – 900KB/second (mode 1)

684 - 1,026KB/second (mode 2)

2,740KB/second

2,740KB/second

Data Buffer

2MB

Reliability

MTBF Power ON Hours ON/OFF Cycles Number of Access Operating Duty Cycle MTTR	100,000 hours 5,436 hours/year 313 cycles/year 600,000 accesses/year 20% of Power ON time (Reading/Seeking) 2% of Power ON time (Writing/Seeking) 0.5 hours		
Environmental			
Ambient Temperature Operating Storage Shipping	5 ^o to 50 ^o C (41 ^o to 122 ^o F) -10 ^o to 60 ^o C (14 ^o to 140 ^o F) -40 ^o to 65 ^o C (-40 ^o to 149 ^o F)		
Temperature Gradient Operating Storage/Shipping	11 ⁰ C /hour (max) 20 ⁰ C /hour (max)		
Relative Humidity Operating Storage/Shipping	8% to 80% 5% to 95% (wet bulb 40 C max)		
Vibration Operating (5 to 500 Hz) (read) Operating (5 to 500Hz) (write) Non-operating (10 to 500Hz) Transporting (with packing) (10 to 25 Hz	2.45 m/s ² (0.25G) (O-P) 2.45 m/s ² (0.25G) (O-P) 9.8 m/s ² (1.0G) (O-P) 9.8 m/s ² (1.0G) (O-P)		
Shock (Non-operating)	490 m/s² [50G]		
Acoustical Noise	40dB		
Power			
DC Voltage and Current Requirements	+5V ±5% (Operating)		
Physical			
Height Width Depth Weight	0.5" (12.7mm) 5.04" (128mm) 4.96" (126.1mm) 7.05oz (.2kg)		
Connectors			
IDE Interface Connector	50 Pin I/F ATAPI Standard		

Regulatory

The SD-R6012 DVD Writeable drive has been certified by the following regulatory agencies:

- UL 1950
- CSA C22.2 No. 950
- TUV (EN60950I)
- CE standard
- DHHS 21 CFR Sub-Chapter J
- FDA CFR21, EN60825



Drive Connectors – SD-R6012

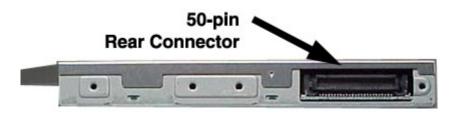


Figure 1.SD-R6012 DVD Writeable Drive Rear Panel – Connector

ATAPI A 50-pin ATAPI interface connector is found at the rear of the SD-R6012 DVD rewriteable drive. Connecting cable should use Japan Aviation Electronics Industry Limited KX14-50Series L or equivalent connector.

PIN	I/O	SIGNAL NAME	PIN	I/O	SIGNAL NAME
NO.			NO.		
1	0	Audio L-CH	2	0	Audio R-CH
3		Audio Ground	4		Digital Ground
5	I	/RESET	6	I/O	DD8
7	I/O	DD7	8	I/O	DD9
9	I/O	DD6	10	I/O	DD10
11	I/O	DD5	12	I/O	DD11
13	I/O	DD4	14	I/O	DD12
15	I/O	DD3	16	I/O	DD13
17	I/O	DD2	18	I/O	DD14
19	I/O	DD1	20	I/O	DD15
21	I/O	DD0	22	0	DMARQ
23		Ground	24	I	/DIOR: /
					HDMARDT:
					HSTROBE
25	I	/DIOW:STOP	26		Ground
27	0	IORDY: /	28	I	/DMACK
		DDMARDY:			
		DSTROBE			
29	0	INTRQ	30	0	/IOCS16
31		DA1	32	I/O	/PDIAG
33	I	DA0	34	Ι	DA2
35	I	/CS1FX	36	Ι	/CS3FX
37	I/O	/DASP	38	-	+5V (Motor)
39	I	+5V (Motor)	40	-	+5V (Motor)
41	I	+5V (Logic)	42		+5V (Logic)
43		Ground	44		Ground
45		Ground	46		Ground
47	I	CSEL	48		Ground
49	I	Vendor Unique*	50	Ι	Vendor Unique*
*Vender	*Vender Unique, don't connect pins				

Table 1.Interface Pin Assignments

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com