




FM Modulator / Isolation Transformer Connections and Installation Instructions

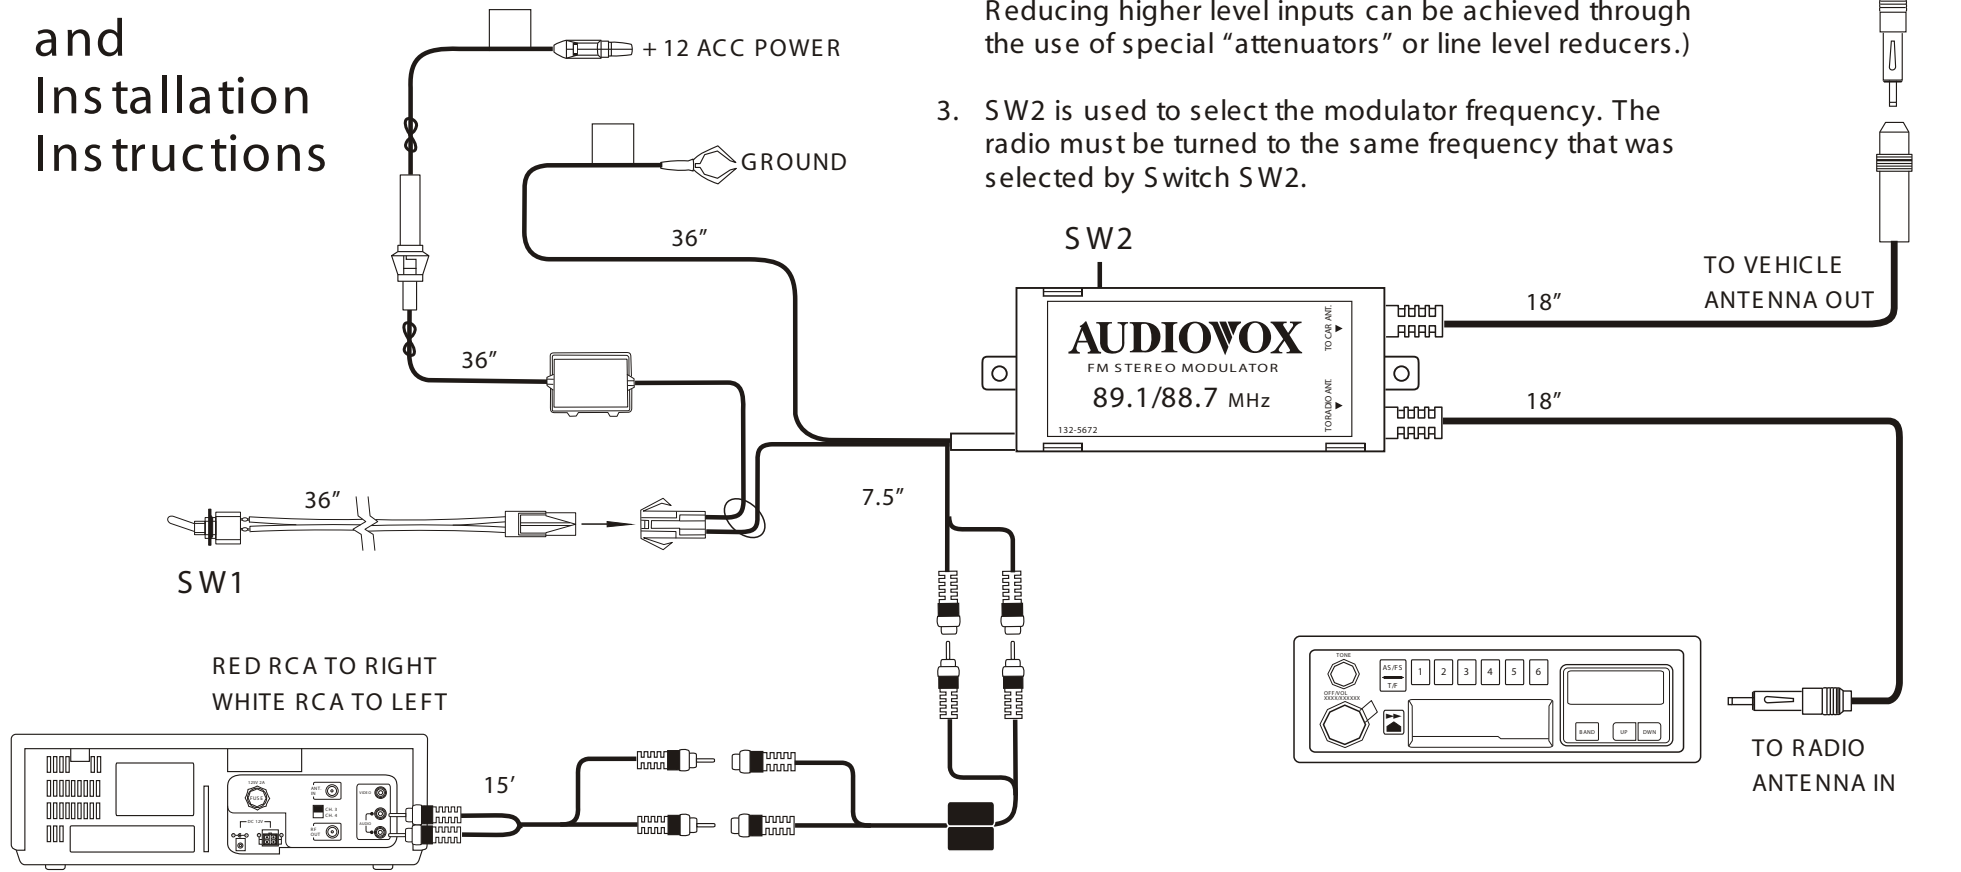

RCA PATCH CORD REQUIRED FOR STEREO CONNECTION
Y-ADAPTER REQUIRED FOR MONO CONNECTION (6")

NOTE

1. The Vehicle antenna is cut off from the radio when the power is supplied to the FM modulator via SW1. Power to the modulator must be switched off in order to receive normal AM/FM reception.
2. The FM modulator is designed to accept "Line Level" signals only. These "signals" require amplification to drive headphones or speakers. (Inputting "Higher" level audio signals (headphone, external speaker etc) will override the radio and cause unwanted noise. Reducing higher level inputs can be achieved through the use of special "attenuators" or line level reducers.)
3. SW2 is used to select the modulator frequency. The radio must be turned to the same frequency that was selected by Switch SW2.

128-6818

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>