


Overview

AT A GLANCE

- All-in-one form factor with three spindle support
- Intel Celeron® processor up to 400 MHz
- 128K integrated cache
- Choice of 12.1-inch Fast Response CSTN or 12.1-inch TFT displays, supporting resolutions of up to 800 x 600
- 64-bit video graphics with 2-MB SDRAM
- 32-MB standard SDRAM, expandable up to 160 MB
- Dual-function bay supports either diskette drive or additional battery for up to six hours of battery life^{1,2}.
- Supports NiMH batteries or optional Li-Ion batteries
- 4-GB³ SMART Upgradable hard drives
- Internal 24X Max⁴ CD-ROM Drive
- 56K⁵, V.90 compliant internal models (available in select countries)
- Two Type II/One Type III 32-bit PC Card slots
- Full-sized keyboard with four user-programmable keys and speakerphone
- Touchpad pointing device
- Sound Blaster Pro-compatible with 16-bit stereo Compaq Premier[•]Sound™, integrated speakers and microphone Software MPEG1
- Intelligent Manageability for lower total cost of ownership
- Optional Pass-Through or Ethernet Convenience Bases
- Compaq Services, including a one-year, Worldwide Limited Warranty⁶ with second business day⁷ expedited pick-up and repair in North America

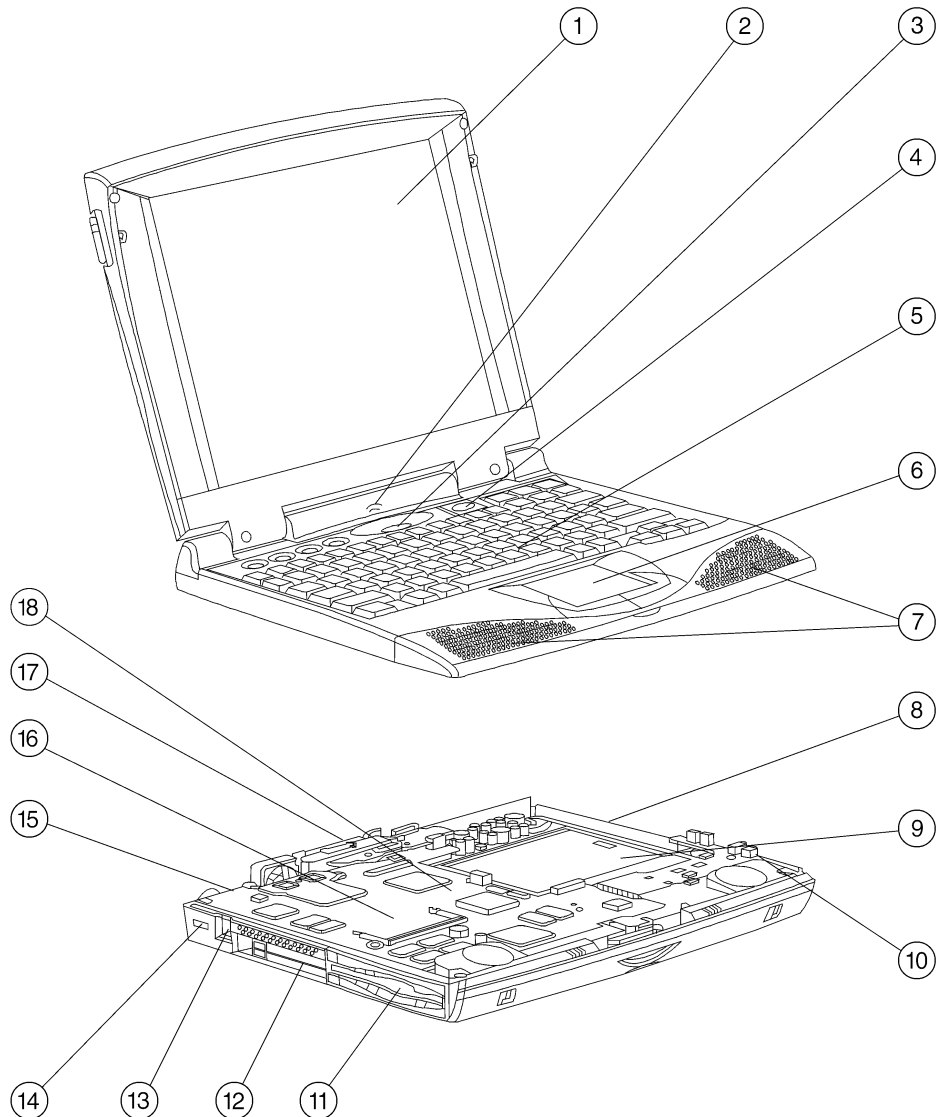

- | | |
|--|---|
| 1. Display | 10. Battery Pack |
| 2. Microphone | 11. Dual Bay (supports additional battery or diskette drive) |
| 3. Stand-by Button | 12. Two Type II/One Type III PC Card Slots; Card Bus-capable ⁸ |
| 4. Power Switch | 13. V.90/56Kflex ⁵ Data/14.4 Kb/s Fax Modem |
| 5. Full-size Keyboard with Four User-programmable Keys | 14. DC Power |
| 6. Touchpad Pointing Device | 15. Universal Serial Bus (USB) |
| 7. Stereo Speakers | 16. Memory Slot |
| 8. 24X Max ⁴ CD-ROM Drive | 17. Convenience Base Connector |
| 9. Upgradable SMART Hard Drive | 18. Processor Board |

Standard Features

MODELS

Windows NT Workstation 4.0 and Integrated Modem

C400/T/4000/D/M/3
150129-xx6

C400/S/4000/D/M/3
150055-xx6

C366/T/4000/D/M/3
388067-xx6

C366/S/4000/D/M/3
388065-xx6

C300/T/4000/D/M/3
386338-xx6

C266/S/4000/D/M/3
386332-xx6

Windows NT Workstation 4.0 Non-Modem

C400/T/4000/D/O/3
150128-xx6

C400/S/4000/D/O/3
149899-xx6

C366/T/4000/D/O/3
388066-xx6

C366/S/4000/D/O/3
388064-xx6

C300/T/4000/D/O/3
386337-xx6

C266/S/4000/D/O/3
386331-xx6

Windows 98 and Integrated Modem

C400/T/4000/D/M/2
150129-xx4

C400/S/4000/D/M/2
150055-xx4

C366/T/4000/D/M/2
388067-xx4

C366/S/4000/D/M/2
388065-xx4

C300/T/4000/D/M/2
386338-xx4

C266/S/4000/D/M/2
386332-xx4

(Continued next page)

All-in-one Design

All-in-one design includes integrated Diskette Drive, Hard Drive, CD-ROM Drive and modem, providing full functionality in the office or on the road; dual-function bay supports either diskette drive or second battery for additional flexibility.

Processor

Intel Celeron processor 400 MHz

C400/T/4000/D/M/3
C400/S/4000/D/M/3
C400/T/4000/D/O/3
C400/S/4000/D/O/3
C400/T/4000/D/M/2
C400/S/4000/D/M/2
C400/T/4000/D/O/2
C400/S/4000/D/O/2
C400/T/4000/D/M/1
C400/S/4000/D/M/1
C400/T/4000/D/O/1
C400/S/4000/D/O/1

Intel Celeron processor 366 MHz

C366/T/4000/D/M/3
C366/S/4000/D/M/3
C366/T/4000/D/O/3
C366/S/4000/D/O/3
C366/T/4000/D/M/2
C366/S/4000/D/M/2
C366/T/4000/D/O/2
C366/S/4000/D/O/2
C366/T/4000/D/M/1
C366/S/4000/D/M/1
C366/T/4000/D/O/1
C366/S/4000/D/O/1

Intel Celeron processor 300 MHz

C300/T/4000/D/M/3
C300/T/4000/D/M/2
C300/T/4000/D/M/1
C300/T/4000/D/O/3
C300/T/4000/D/O/2
C300/T/4000/D/O/1

Intel Celeron processor 266 MHz

C266/S/4000/D/M/3
C266/S/4000/D/M/2
C266/S/4000/D/M/1
C266/S/4000/D/O/3
C266/S/4000/D/O/2
C266/S/4000/D/O/1

Cache Memory

Integrated 128-KB L2

Memory

Standard 32 MB
Maximum 160 MB

Standard Features

MODELS

(continued)

Windows 98 Non-Modem

C400/T/4000/D/0/2
150128-xx4

C400/S/4000/D/02
149899-xx4

C366/T/4000/D/0/2
388066-xx4

C366/S/4000/D/0/2
388064-xx4

C300/T/4000/D/0/2
386337-xx4

C266/S/4000/D/0/2
386331-xx4

Windows 95 and Integrated Modem

C400/T/4000/D/M/1
150129-xx2

C400/S/4000/D/M/1
150055-xx2

C366/T/4000/D/M/1
388067-xx2

C366/S/4000/D/M/1
388065-xx2

C300/T/4000/D/M/1
386338-xx2

C266/S/4000/D/M/1
386332-xx2

Windows 95 Non-Modem

C400/T/4000/D/0/1
150128-xx2

C400/S/4000/D/0/1
149899-xx2

C366/T/4000/D/0/1
388066-xx2

C366/S/4000/D/0/1
388064-xx2

C300/T/4000/D/0/1
386337-xx2

C266/S/4000/D/0/1
386331-xx4

Communications

Integrated V.90/K56flex⁵ data/14.4 Kb/s Fax Modem

C400/T/4000/D/M/3
C400/S/4000/D/M/3
C400/T/4000/D/M/2
C400/S/4000/D/M/2
C400/T/4000/D/M/1
C400/S/4000/D/M/1
C366/T/4000/D/M/3
C366/S/4000/D/M/3
C366/T/4000/D/M/2
C366/S/4000/D/M/2
C366/T/4000/D/M/1
C366/S/4000/D/M/1
C300/T/4000/D/M/3
C300/T/4000/D/M/2
C300/T/4000/D/M/1
C266/S/4000/D/M/3
C266/S/4000/D/M/2
C266/S/4000/D/M/1

Keyboard

101/102-key compatible keyboard with isolated, inverted-T cursor control keys, and right-control key, four user-programmable keys, special feature hotkeys for instant access to power conservation, QuickLock/QuickBlank, toggle between internal and external, or simultaneous displays, battery gauge, speaker volume control, brightness and contrast

Pointing Device

Touchpad

PC Card Slots

Two Type II/One Type III PC Card Slot(s) which support both 32-bit CardBus⁸ and 16-bit PC Cards; zoomed video support in bottom slot only

Storage

Removable Diskette Drive	1.44 MB
CD-ROM	24X Max ⁴ CD-ROM Drive
Hard Drives	4-GB ³ SMART

Multimedia

Compaq *Premier* Sound for enhanced stereo audio
Integrated 16-bit Sound Blaster Pro-compatible stereo audio
Integrated stereo speakers and microphone
Software/hardware volume control
Headphone out
Microphone in jacks
Software MPEG1 support
Internal 24X Max⁴ CD-ROM Drive

Standard Features

Interfaces

PC Card	1
Enhanced Parallel	1
Serial	1
External Monitor	1
External Keyboard/ Pointing Device	1
Convenience Base	1
Headphone/Line-out	1
Microphone	1
AC Power	1
RJ-11	1
USB	1

Graphics

64-bit video graphics with 2-MB SDRAM for increased color depth and graphics performance

Display

12.1-inch high-contrast color and fast response STN with 800 x 600 resolution (up to 16.7M colors internal)

C400/S/4000/D/M/3
C400/S/4000/D/O/3
C400/S/4000/D/M/2
C400/S/4000/D/O/2
C400/S/4000/D/M/1
C400/S/4000/D/O/1
C366/S/4000/D/M/3
C366/S/4000/D/O/3
C366/S/4000/D/M/2
C366/S/4000/D/O/2
C366/S/4000/D/M/1
C366/S/4000/D/O/1
C266/S/4000/D/M/3
C266/S/4000/D/M/2
C266/S/4000/D/M/1
C266/S/4000/D/O/3
C266/S/4000/D/O/2
C266/S/4000/D/O/1

12.1-inch color TFT with 800 x 600 resolution (up to 16.7M colors internal)

C400/T/4000/D/M/3
C400/T/4000/D/O/3
C400/T/4000/D/M/2
C400/T/4000/D/O/2
C400/T/4000/D/M/1
C400/T/4000/D/O/1
C366/T/4000/D/M/3
C366/T/4000/D/O/3
C366/T/4000/D/M/2
C366/T/4000/D/O/2
C366/T/4000/D/M/1
C366/T/4000/D/O/1
C300/T/4000/D/M/3
C300/T/4000/D/M/2
C300/T/4000/D/M/1
C300/T/4000/D/O/3
C300/T/4000/D/O/2
C300/T/4000/D/O/1

Standard Features

Software

Windows NT Workstation 4.0
Insight Management Agents
Intelligent Manageability
Security 32
Diagnostics for Windows NT
Compaq Power Management
Online Safety and Comfort Guide
Reference Guide

C400/T/4000/D/M/3
C400/S/4000/D/M/3
C400/T/4000/D/O/3
C400/S/4000/D/O/3
C366/T/4000/D/M/3
C366/S/4000/D/M/3
C366/T/4000/D/O/3
C366/S/4000/D/O/3
C300/T/4000/D/M/3
C300/T/4000/D/O/3
C266/S/4000/D/M/3
C266/S/4000/D/O/3

Windows 98
Insight Management Agents
Intelligent Manageability
Security 32
Diagnostics for Windows 98
Compaq Power Management
Online Safety and Comfort Guide
Reference Guide

C400/T/4000/D/M/2
C400/S/4000/D/M/2
C400/T/4000/D/O/2
C400/S/4000/D/O/2
C366/T/4000/D/M/2
C366/S/4000/D/M/2
C366/T/4000/D/O/2
C366/S/4000/D/O/2
C300/T/4000/D/M/2
C300/T/4000/D/O/2
C266/S/4000/D/M/2
C266/S/4000/D/O/2

Standard Features

Software *(continued)*

Windows 95
Insight Management Agents
Intelligent Manageability
Security 32
Diagnostics for Windows 95
Compaq Power Management
Online Safety and Comfort Guide
Reference Guide

C400/T/4000/D/M/1
C400/S/4000/D/M/1
C400/T/4000/D/O/1
C400/S/4000/D/O/1
C366/T/4000/D/M/1
C366/S/4000/D/M/1
C366/T/4000/D/O/1
C366/S/4000/D/O/1
C300/T/4000/D/M/1
C300/T/4000/D/O/1
C266/S/4000/D/M/1
C266/S/4000/D/O/1

OS Support

Windows NT Workstation 4.0
Windows 98
Windows 95

Intelligent Manageability

Lowers total cost of ownership by providing enhanced security, asset management, fault prediction with SMART drives

Security

Cable lock support
Power-on password
Set-up passwords
Ability to disable serial port, parallel port, diskette drive, diskette drive boot sequence

Power Supply

External AC adapter and power cord

Standard Features

Battery

Li-Ion batteries are standard, providing over three hours of battery life¹ with one battery, and up to six hours when using two batteries.

C400/T/4000/D/M/3
C400/S/4000/D/M/3
C400/T/4000/D/O/3
C400/S/4000/D/O/3
C400/T/4000/D/M/2
C400/S/4000/D/M/2
C400/T/4000/D/O/2
C400/S/4000/D/O/2
C400/T/4000/D/M/1
C400/S/4000/D/M/1
C400/T/4000/D/O/1
C400/S/4000/D/O/1
C366/T/4000/D/M/3
C366/S/4000/D/M/3
C366/T/4000/D/O/3
C366/S/4000/D/O/3
C366/T/4000/D/M/2
C366/S/4000/D/M/2
C366/T/4000/D/O/2
C366/S/4000/D/O/2
C366/T/4000/D/M/1
C366/S/4000/D/M/1
C366/T/4000/D/O/1
C366/S/4000/D/O/1

NiMH batteries are standard, providing up to three hours of battery life² with one battery, and up to six hours when using two batteries.

C300/T/4000/D/M/3
C300/T/4000/D/M/2
C300/T/4000/D/M/1
C300/T/4000/D/O/3
C300/T/4000/D/O/2
C300/T/4000/D/O/1
C266/S/4000/D/M/3
C266/S/4000/D/M/2
C266/S/4000/D/M/1
C266/S/4000/D/O/3
C266/S/4000/D/O/2
C266/S/4000/D/O/1

Power Conservation

Hibernation, Instant-On via Standby; pop-ups with three presets and one custom level of power conservation

Service and Support

Compaq Services provides a range of services for the Armada 1500c, including a one-year, Limited Warranty⁶, with 7 x 24 service line at 1-800-OK-Compaq (1-800-652-6672) and a free one-year, second business day⁷ pick-up and delivery service from Compaq. All shipping and handling materials are supplied by Compaq.

QUICK SPECS

Compaq Armada 1500c

Options

Memory

128-MB Memory Upgrade	315177-B21
64-MB Memory Upgrade	314891-B21
32-MB Memory Upgrade	314890-B21

Monitors⁹

TFT8000 Flat Panel	307906-001
TFT5000 Flat Panel	325700-001
P1100 Color ¹⁰	325606-001
P900 Color	386326-001
P700 Color	380207-001
P110 Color ¹⁰	325600-001
P75 Color	307806-001
V1100 Color	386472-001
V1000 Color	351757-001
V900 Color	303500-001
V700 Color	325800-001
V500 Color	325900-001
S910 Color	138485-001
S900 Color	360562-001
S710 Color	152991-001
S700 Color	360512-001

Optical Drive

DVD-ROM Drive	401885-B21
---------------	------------

Hard Drive

6.4-GB ³ SMART Hard Drive	310313-B21
--------------------------------------	------------

PC Cards/Communications

Compaq Microcom 420 56K ⁵ Global Fax Modem PC Card	317900-001
Compaq Microcom 550 Combo PC Card	321550-001
Compaq Ethernet LAN PC Card	224750-001
Armada 1500 series 560 Telephony Modem (Internal Upgrade)	307710-001
10/100 TX PC Card UTP Controller	335506-B21
10 T PC Card UTP Controller	292806-B21
10 2 PC Card Coax Controller	292807-B21
10/100 TX PC Card UTP Controller Upgrade	292813-B21
16/4 TR PC Card IBM UTP/STP Controller	305708-001

For additional compatible PC Cards, view the Compaq PC Card Solutions List on the Compaq website at <http://www.compaq.com/support/techpubs/pcmcia/pccardlist.html>.

Convenience Bases

Convenience Base (Ethernet)	316239-001
Convenience Base (Pass-Through)	316238-001

Power

Li-Ion Battery	254936-B21
External Battery Charger	254938-B21
Auto/Aircraft Adapter	296537-B21
AC Line Cord (10-ft)	217932-002

Input Devices

External Enhanced III Keyboard (Beach Gray)	110562-001
External Enhanced III Keyboard (Opal)	294343-001
External Infrared Transceiver	220687-002
Compaq Mouse (Beach Gray)	143315-001
Compaq Mouse (Opal)	143315-B21

Other

Security Lock	294316-B21
Portable Video Conferencing Kit	296954-001
Armada Headset with microphone	220460-001
Universal Monitor Stand	294315-B21

Carrying Cases

Compaq Value Case	294266-B21
Compaq Workstation Case	294267-B21
Compaq Global Case	294268-B21
Compaq Professional Case (Nylon)	401366-B21
Compaq Professional Case (Leather)	401367-B21

For additional Compaq Brand cases, call 1-800-888-5903.

Memory

Compaq Armada 1500c

STANDARD MEMORY

32 MB installed on the System Board (1 slot available)

Standard	Slot
32 MB	1 Empty

STANDARD MEMORY PLUS

OPTIONAL MEMORY

Support for up to 160 MB of 60ns SDRAM is available with the installation of an optional Memory Upgrade.

Up To	Slot
160 MB	1 128 MB
96 MB	64 MB
64 MB	32 MB


Following are memory options available from Compaq:

- 128-MB Memory Upgrade 315177-B21
- 64-MB Memory Upgrade 314891-B21
- 32-MB Memory Upgrade 314890-B21

QUICK SPECS

Compaq Armada 1500c

Storage



- 1 CD-ROM Drive Bay
- 2 Upgradable Hard Drive (Internal)
- 3 Dual Bay

DRIVE SUPPORT

	Quantity Supported	Drive Bay Supported
Removable Media		
1.44-MB Diskette Drive	Up to 1	Dual Bay
24X Max ⁴ CD-ROM Drive	Up to 1	CD-ROM Drive Bay
Hard Drives		
4-GB ³ SMART Hard Drive	Up to 1	Upgradable Hard Drive

Technical Specifications

System Unit

Dimensions (HxWxD)	2.1 x 12.2 x 9.6 in/5.38 x 31.1 x 24.5 cm
Weight	
Modem Models	7.33 lbs/3.33 kg
Non-Modem Models	6.9 lbs/3.08 kg
Stand-Alone Power Requirements	
Nominal Operating Voltage (Li-Ion)	14.2 VDC
Nominal Operating Voltage (NiMH)	9.6
Maximum Operating Power	35W
Peak Operating Power	40W
Temperature	
Operating	50° to 95°F/10° to 35°C
Non-operating	-4° to 140°F/-20° to 60°C
Relative Humidity (non-condensing)	
Operating	10% to 90%
Non-operating	5% to 95%
Shock	
Operating	10 G, 11 ms, half-sine
Non-operating	60 G, 11 ms, half-sine
Vibration	
Operating	0.25 G, 1 Oct/Min sweep rate
Non-operating	1 G, 1 Oct/Min sweep rate
Maximum Altitude (unpressurized)	
Operating	10,000 ft/3,048 m
Non-operating	30,000 ft/9,144 m

12.1-Inch Color STN 800 x 600 Display

Dimensions (HxW)	7.24 x 9.7 in/18.4 x 24.6 cm
Diagonal Size	12.1 in/30.7 cm
Mounting	Internal
Number of Colors	16M
Contrast Ratio	100:1
Brightness	Over 90 cd/m ² (typical)
Pixel Resolution	
Pitch	0.3 x 0.3 mm
Format	800 x 600
Configuration	RGB Stripe
Backlight	Edge Lit
Character Display	80 x 25, 80 x 50
Total Power Consumption (with backlight)	6W (maximum)

Technical Specifications

12.1-Inch Color TFT 800 x 600 Display

Dimensions (HxW)	7.24 x 9.7 in/18.4 x 24.6 cm
Diagonal Size	12.1 in/30.7 cm
Mounting	Internal
Number of Colors	16M
Contrast Ratio	100:1
Brightness	Over 120 cd/m ² (typical)
Pixel Resolution	
Pitch	0.3 x 0.3 mm
Format	800 x 600
Configuration	RGB Stripe
Backlight	Edge Lit
Character Display	80 x 25, 80 x 50
Total Power Consumption (with backlight)	6W (maximum)

Hard Drives

4 GB³	Capacity	4 GB ³	Seek Time (typical reads, including settling)	
	Height	1 in/25.4 mm	Single Track	4 ms
	Size	2.5 in/63.5 mm	Average	13 ms (read)
	Interface	ATA	Full-Stroke	23 ms
	Transfer Rate		Rotational Speed	4,009
	Synchronous (Maximum)	33.3 MB/s	Physical Configuration	
			Bytes/sector	512
			Operating Temperature	41° to 131°F/5° to 55°C

Diskette Drive

Diskette Size	3.5 in
Light	None
Height	0.82 in/2.08 cm
Bytes per Sector	512
Sectors per track	
High density	18 (1.44 MB)/15 (1.2 MB)
Low density	9
Tracks per side	
High density	80 (1.44 MB)/80 (1.2 MB)
Low density	80
Read/Write heads	2
Access Times	
Track-to track (high/low)	3 ms/6 ms
Average (high/low)	94 ms/174 ms
Settling time	15 ms
Latency average	100 ms

External AC Adapter

Weight	0.66 lb/0.3 kg
Power Supply (Input)	
Operating Voltage	90 to 260 VAC RMS
Operating Current	1.1 A RMS
Operating Frequency Range	47 to 63 Hz AC
Maximum Transient	4/50 kV

QUICK SPECS

Compaq Armada 1500c

Technical Specifications

Li-Ion Battery Pack¹

Dimensions (HxWxD)	0.82 x 3.2 x 5.8 in/2.08 x 8.13 x 14.73 cm
Weight	0.85 lb/0.39 kg
Energy	
Voltage	14.4V
Amp-hour capacity	2.7 Ah
Watt-hour capacity	39Wh
Temperature	
Operating	50° to 104° F/10° to 40° C
Non-operating	-12° to 140°F/-25° to 60°C

NiMH Battery Pack²

Dimensions (HxWxD)	0.82 x 3.2 x 5.8 in/2.08 x 8.13 x 14.73 cm
Weight	0.85 lb/0.39 kg
Energy	
Voltage	14.4V
Amp-hour capacity	2.6 Ah
Watt-hour capacity	37Wh
Temperature	
Operating	50° to 104° F/10° to 40° C
Non-operating	-12° to 140°F/-25° to 60°C

Convenience Base

Dimensions (HxWxD)	4.9 x 14.2 x 14.7 in/12.46 x 36.07 x 37.34 cm
Weight	4.25 lbs/1.93 kg
Power Supply (Input)	
Operating Voltage	100 to 240 VAC
Operating Current	1.1 Amp Maximum
Rated Voltage	100 to 240 VAC
Rated Current	1 Amp Maximum
Line Frequency	47 to 63 Hz
Temperature	
Operating	50° to 95°F/10° to 35°C
Non-operating	-4° to 140°F/-20° to 60°C
Relative Humidity	
Operating	10% to 90%
Non-operating	5% to 95%
Altitude	
Operating	10,000 ft/3,048 m
Non-operating	30,000 ft/9,144 m
Shock	
Operating	10 G, 11 ms, half-sine
Non-operating	140 G, 2 ms, half-sine
Vibration	
Operating	0.25 G, 5 to 500 Hz, 0.5 octave/min sweep rate
Non-operating	1 G, 5 to 500 Hz, 0.5 octave/min sweep rate
Monitor Support	Up to 55 lbs/24.95 kg

Technical Specifications

24X Max⁴ CD-ROM Drive

Applicable Disc	CD-DA, CD-ROM, CD-ROM XA (except ADPCM), CD-1, Photo CD (Multi-session), Video CD, CD-Extra (CD+), CD-G
Center Hole Diameter	15 mm
Disc Diameter	12 cm, 8 cm
Disc Thickness	1.2 mm
Track Pitch	1.6 μ m
Laser	
Output power	0.24 \pm 0.1mW
Type	GaAlAs double hetero laser diode
Wave length	770 to 795 nm at Ph-2.7 mW
Access Times (typical reads, including settling)	150 ms
Audio Output Level	
Line-out	0.8 to 1.2 Vrms
Headphone	None
Cache Buffer	128 KB
Data Transfer Rate	
Sustained	150 KB/s (sustained 1X)
Variable	1500 to 3500 KB/s (10X to 24X)
Start-up Time	< 8 sec
10Base-T	Categories 3, 4 or 5 UTP (2 or 4 pair); up to 328 feet (100 meters)
100Base-TX	Category 5 UTP (2 pair); up to 328 feet (100 meters)

¹ Actual results may vary depending on individual usage. When tested in the standard configuration, using the Ziff-Davis BatteryMark Life test version 2.0, the battery life of the Armada 1500c will range up to 3.3 hours. Standard configuration at time of announcement (5/17/99) 12.1" panel, 32-MB memory, Li-Ion battery and no drives other than the hard drive active.

² Actual results may vary depending on individual usage. When tested in the standard configuration, using the Ziff-Davis BatteryMark Life test version 2.0, the battery life of the Armada 1500c will range up to 3.0 hours. Standard configuration at time of announcement (1/25/99) 12.1" panel, 32-MB memory, NiMH battery and no drives other than the hard drive active.

³ For Hard Drives, GB = Billion Bytes.

⁴ Data transfer rates will vary from 150 KB/s to 3600 KB/s.

⁵ Designed only to allow faster downloads from K56flex or V.90 compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem only supports Windows 9.x and Windows NT 4.0.

⁶ Certain restrictions and exclusions apply. Service and support programs vary by geographic regions. Consult the Compaq Customer Support Center for details.

⁷ Pick-up and delivery service is available in 48 contiguous US states and Canada. Eligibility for priority pick-up (second business day return) is limited to certain geographic locations. Carry-in service available outside the US and Canada.

⁸ Full support in Windows 9.x.

⁹ AssetControl monitor. AssetControl features are accessible with Compaq desktops featuring Intelligent Manageability.

¹⁰ May not be compatible with the ArmadaStation Monitor Support Stand, the Convenience Base I, or the Convenience Base II due to weight limitations.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>