Indoor Fiber Distribution Terminals - CPE



Product Description

The ADC Indoor Fiber Distribution Terminal (IFDT) series provides Customer Premises Equipment applications with a compact and secure family of enclosures for connecting fiber cables within building entrance locations, communication closets, computer rooms and other indoor environments. The IFDT products utilize a rugged double-hinged design that effectively isolates the splicing and cable termination in the rear compartment from the jumper interconnection in the front compartment. Separating the cable splicing and termination function from the interconnection function allows the unit to be used as a dual-access product with secure lockable access provided for each compartment.

The layered IFDT and staggered interconnection field provides ease of access to all connections. The IFDT enclosure provides mounting positions for standard APLH modular adapter panels (12-packs, 8-packs, 6-packs, etc.) accommodating any industry standard adapters.

Sizes

The IFDT products are designed to splice and terminate fibers in a range of sizes including 6, 12, 24, 48, 72, and 96 fibers.

Mounting Applications

The ADC IFDT Series cabinets are for indoor wall mount applications and are designed to NEMA-12 rating. The dual hinged design allows complete front and rear access. The two secure doors are locked with a standard can wrench tool and may optionally be secured with a standard pad-lock. The unit may also be configured for single lock entry thus allowing the products to be used for single access applications.



www.adc.com • +1-952-938-8080 • 1-800-366-3891



Indoor Fiber Distribution Terminals - CPE

Interior Wall Mount Terminals

Fiber Management

The enclosures accommodate optical component modules allowing the unit to house splitters, WDMs, filters and other optical components. For splicing applications, ADC's splice trays can be installed to support either individual fusion splicing or mass fusion splicing. The units provide sealed cable ports for cables and interconnection cables and gaskets to protect against dust and water spray. The units can also be configured with a standard cable grip kit to provide strain relief for incoming fiber cables. The splice compartment provides ample space for storing loose-tube, ribbon or individual fiber slack.



Features

- 12-Packs provide for high-density terminations and conserve wall space.
- Integrated splice tray offers flexible splice management for individual or mass splicing.
- Sealed enclosure protect fibers from dust, water spray, insects and other contaminants.
- Dual-hinged design ensures separation of owner/client network segments.
- Designed to NEMA-12
- Designed to GR-2898-CORE
- Front and rear layer maximizes wall space utilization for both splicing and interconnect.
- Robust steel construction protects fibers against damage and ensures network reliability.
- Slotted cable entrance ports allow for rapid cable installation and pass-through capability.
- Cable management and routing limits bend radius and adds strain relief.
- 216-Tool (can wrench), key lock or padlock offers flexible security options.







2




Indoor Fiber Distribution Terminals - CPE

Interior Wall Mount Terminals

Specifications

| | IFDT-12 | IFDT-24 | IFDT-48 | IFDT-72 | IFDT-96 |
|------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Fibers (nominal) | 6 and 12 | 24 | 48 | 72 | 96 |
| Adapter Panels | 2 APLH | 2 APLH | 4 APLH | 6 APLH | 8 APLH |
| Splice Trays | 1/12f | 2/12f | 4/12f | 6/12f | 8/12f |
| Cable Ports | 2 slotted | 4 slotted | 4 slotted | 4 slotted | 4 slotted |
| Grip Clamps | 2 | 4 | 4 | 4 | 4 |
| Jumper Ports | 2 slotted |
| NEMA Rating | 12 | 12 | 12 | 12 | 12 |
| Height | 7.0 in. (17.8 cm) | 8.0 in. (20.3 cm) | 18.5 in. (47.0 cm) | 24.5 in. (62.2 cm) | 32.0 in. (81.2cm) |
| Width | 12.0 in. (30.5 cm) | 14.0 in. (35.5 cm) | 13.0 in. (33.0 cm) | 13.0 in. (33.0 cm) | 13.0 in. (33.0 cm) |
| Depth | 3.0 in. (7.6 cm) | 5.0 in. (12.7 cm) | 5.0 in. (12.7 cm) | 5.0 in. (12.7 cm) | 5.0 in. (12.7 cm) |
| Weight (Empty) | 5.0 lbs (2.3 kg) | 7.0 lbs (15.4 kg) | 12.8 lbs (28.2 kg) | 16.0 lbs (35.2 kg) | 20.0 lbs (44 kg) |
| Color | CO White |

www.adc.com • +1-952-938-8080 • 1-800-366-3891

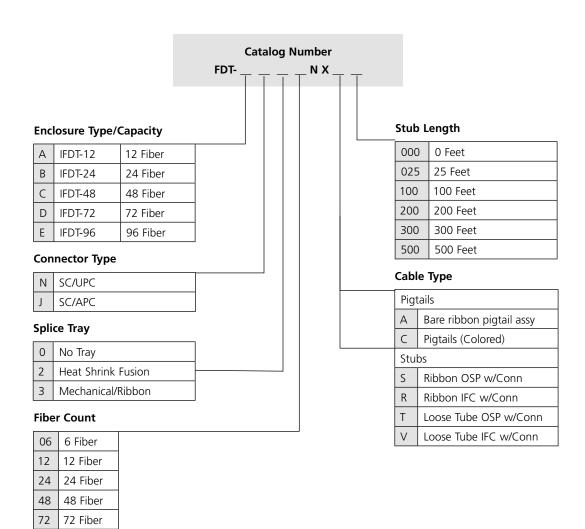



96

96 Fiber



Website: www.adc.com

From North America, Call Toll Free: 1-800-366-3891 • Outside of North America: +1-952-938-8080 Fax: +1-952-917-3237 • For a listing of ADC's global sales office locations, please refer to our Website.

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101 Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

103562AE 6/07 Revision © 2006, 2007 ADC Telecommunications, Inc. All Rights Reserved

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com