


HOTSOAK 65

HOTSOAK SERIES MODEL # AI6AIR6060HS



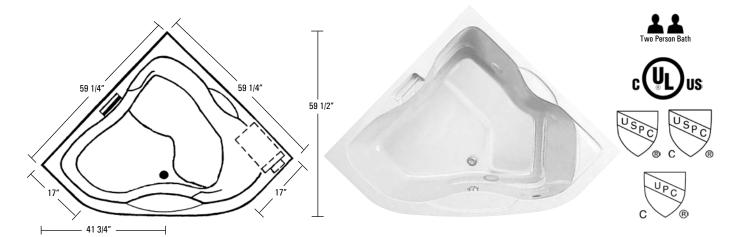





SPECIFICATIONS:

GENERAL SPECIFICATIONS:

59 1/4" x 59 1/4" x 24 1/2" **Tub Size** 150 cm x 150 cm x 62 cm

Lounge 1, 48" long **Bathing Well**

Lounge 1, 20" wide Lounge 2, 40" long Lounge 2, 17" wide

22 3/4" interior depth

Shipping Weight 236 lbs. / 107 kg **Tub Weight Filled** 881 lbs. / 400 kg **Tub Only Weight** 136 lbs. / 62 kg Gallons to Overflow 90 gal. / 341 L

ELECTRICAL SPECIFICATIONS:

1/15 HP; 1.3 AMP; 110V Pump 1.5 kW; 12.5 AMP; 110V Heater Requirements 20 AMP; 110V, separate circuit required protected w/ Class A GFCI

STANDARD EQUIPMENT:

Aquatic Quality Features:

- 1.5 kW Inline Maintenance Heater
- Run-Dry Pump with 20-Minute Timer
- 2 Circulation Portal Covers
- Bath-Side On/Off Electronic Button
- "Quiet Pad" Anti-Vibration Pump Mount for Quiet Operation
- Raised Seat
- Slip Resistant Floor
- 2 Arm Rests
- Extra Deep and Long Bathing Well
- Pre-leveled ABS Support Base
- Color Matched Grab Bar
- Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
- Durable, Easy to Clean, Lucite® Cast Acrylic Surface
- Available in 8 Standard No-Charge Colors

UL & IAPMO Listed, Factory Tested Limited Lifetime Warranty

This unit is not recommended for shower installations.

OPTIONAL EQUIPMENT:

- Chromatherapy LED Lighting*
- Comfort Pillow Oval or Rectangle
- Grab Bar
- White, Biscuit, Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Lift & Turn Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- Cable Drive Waste and Overflow
 - Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- Factory Installed Rigid ABS Tile Flange
- Color Matched Curved Acrylic Skirt
- **Premium Colors**

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

*This whirlpool will need to be hard wired to the breaker box. Three outlets will be supplied on the whirlpool.

Fax-On-Demand Document #1240

August 2008



The manufacturer accepts a 1/4" variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub: Aquatic Industries, Inc. assumes no responsibility for preparatory work. www.aguaticwhirlpools.com 800.555.5324

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com