

OCTAL DS1 IMA

TOTAL ACCESS® DSLAM OCTAL DS1 IMA ACCESS MODULE

The Total Access Octal DS1 IMA Access Module is designed to interface with the Total Access DS3 Cell Switch Module (CSM). Each of the eight ports provide DS1 interfaces. These can be used to connect the shelf to an upstream ATM element or to a DS1 IMA unit of a subtended shelf.

The eight (8) ATM DS1s correspond to the eight port interfaces on the line card. The Octal DS1 IMA automatically swaps from the online to the offline multiplexer, if one fails or is physically removed. Each of the eight ports have a single balanced twisted pair for each direction of transmission.

User access to the Octal DS1 IMA Module is through the SCU via the system bus of the Total Access DSLAM backplane. The unit retains provisioning data in a nonvolatile memory device for recovery after a power loss and supports optional autoprovisioning through the SCU.

The module detects CRC errors, Bipolar Violations, and frame bit errors in the loop side receiver. These are used to calculate Errored Seconds, Severely Errored Seconds and Unavailable Seconds in accordance with ANSI T1.231-1997.

The Octal DS1 IMA card is capable of both short and long haul signals. The interface can be configured for the standard DS1 signal (0 to 22.5 db) or for DSX-1 measured from 0 to 655 feet.

PRODUCT FEATURES

- Software configurable via menu access or SNMP
- Supports from one to eight DS1 line interfaces
- Supports standard T1 MIB 1406 for alarm states
- Supports extended NUB protocol for NTU management
- Supports up to four IMA groups
- DS1 or DSX-1 signal



CORPORATE OFFICE

ADTRAN, Inc.
901 Explorer Boulevard
P.O. Box 140000
Huntsville, AL 35814-4000

800 9ADTRAN
256 963-8000
fax: 256 963-7916
fax back: 256 963-8200
e-mail: info@adtran.com
web site: www.adtran.com

REGIONAL OFFICES

Dallas, TX
800 471-8648

Denver, CO
800 471-8651

Irvine, CA
800 788-5408

Kansas City, KS
800 471-8649

Philadelphia, PA
800 471-8656

San Antonio, TX
888 223-7671

INTERNATIONAL CONTACTS

Beijing, China
8610 8529-8895

Canada
877 923-8726

Germany
49 6007 930-203

Hong Kong
852 2824-8283


Latin America
954 474-4424

London, U.K.
44 1252 626-730

Melbourne, Australia
61 3 9658-0500

Mexico/Caribbean
954 577-0357

Zürich, Switzerland
41 1 880-2777

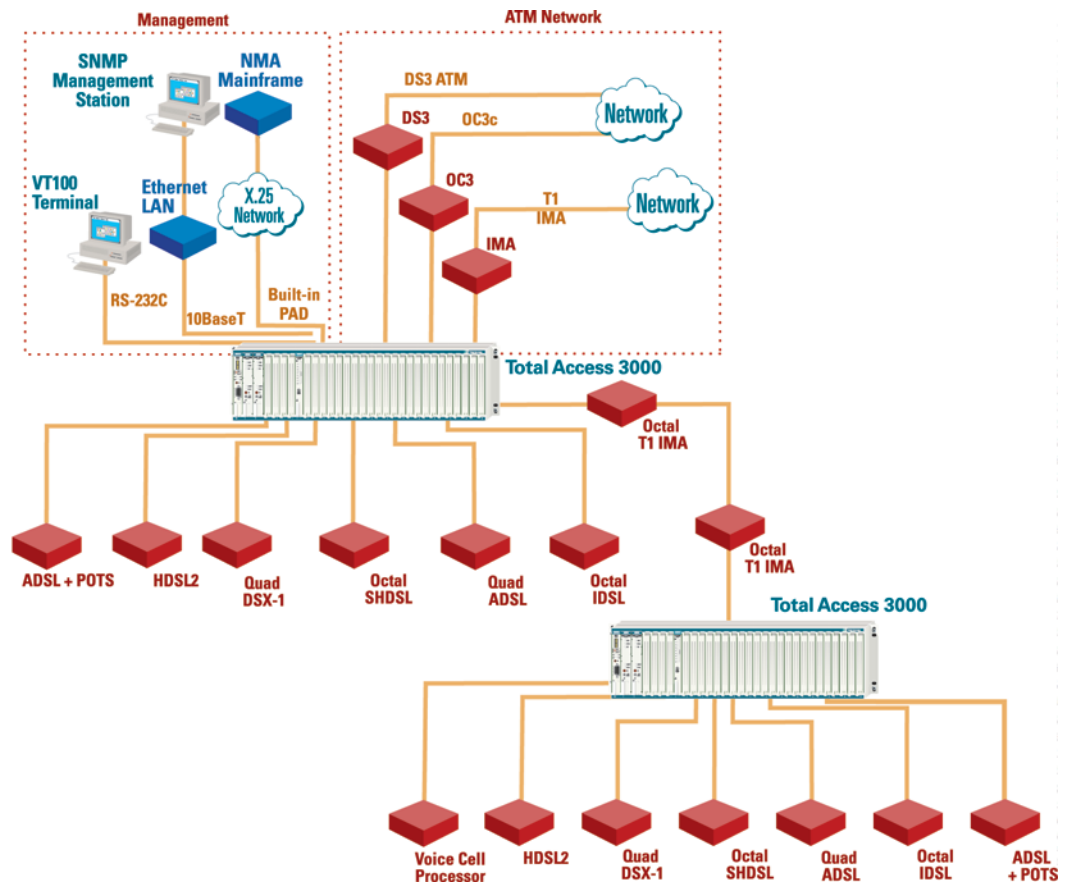

Product Specifications

FACEPLATE FEATURES

Indicators

- Power LED
- 8 DSL T1 Port indicators

MECHANICAL

- **Dimensions:** 5.20 in. H x 1.320 in. W x 10 in. D
- **Weight:** Less than 1 lb.
- **Mounting:** Occupies two access module slots in the Total Access 3000 or 3010 chassis

INTERFACES

- **Network Interface:** ATM upstream through the Cell Switch Module
- **Subscriber Interface:** DSX-1, Robbed Bit Signaling and DS1

ELECTRICAL

- **Power Requirements:** -42 VDC to -56 VDC input range

REGULATORY STANDARDS

- NEBS Level 3
- GR-1089-CORE
- UL 1950

MANAGEMENT

- Craft interface, SNMP, TL1

ENVIRONMENTAL

- **Operating:** -40°C to + 65°C
- **Storage:** -40°C to + 85°C
- **Relative Humidity:** Up to 95 percent, noncondensing

Ordering Information

EQUIPMENT

PART

Total Access 3000 Octal DS1 IMA.....1181409L1

Specifications subject to change without notice.



I.S. EN ISO 9001

ADTRAN is an ISO 9001 registered company.



Printed in the U.S.A. on recycled paper.
61181409L1-8A July 2001
©2001 ADTRAN, Inc. All rights reserved.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>