

# MK-DVF-HID

Vandal Resistant Black & White Video Door Station  
With Built in Proximity Card Reader

**- INSTRUCTIONS-**

The MK-DVF-HID is an MK-series Black & White video door station and an HID ProxPoint Plus Card Reader, built onto the same stainless steel faceplate. The card reader provides electronic access to a building through a separate Access Control System, which is not supplied by Aiphone.

**INSTALLATION:**

1. For flush mounting, cut hole in wall and use supplied back box.  
Box dimensions are 4-1/2"W x 10-3/8"H x 1-3/4"D.
2. For surface mounting, use the SBX-DVF-P surface mount box.  
This box can mount to a standard 1- gang box or to any flat surface.



**Connecting the Reader to the Host:**


Connect the reader to the host according to the wiring table below and the host installation guide.

Wiegand	Wire Color
+ DC (5-16V)	Red
Ground	Black
Data0	Green
Data1	White
Shield Ground	Drain
Green LED	Orange
Red LED	Brown
Beeper	Yellow
Hold	Blue
Card Present	Violet

← 20" pigtail cable



## WIRING DIAGRAM:

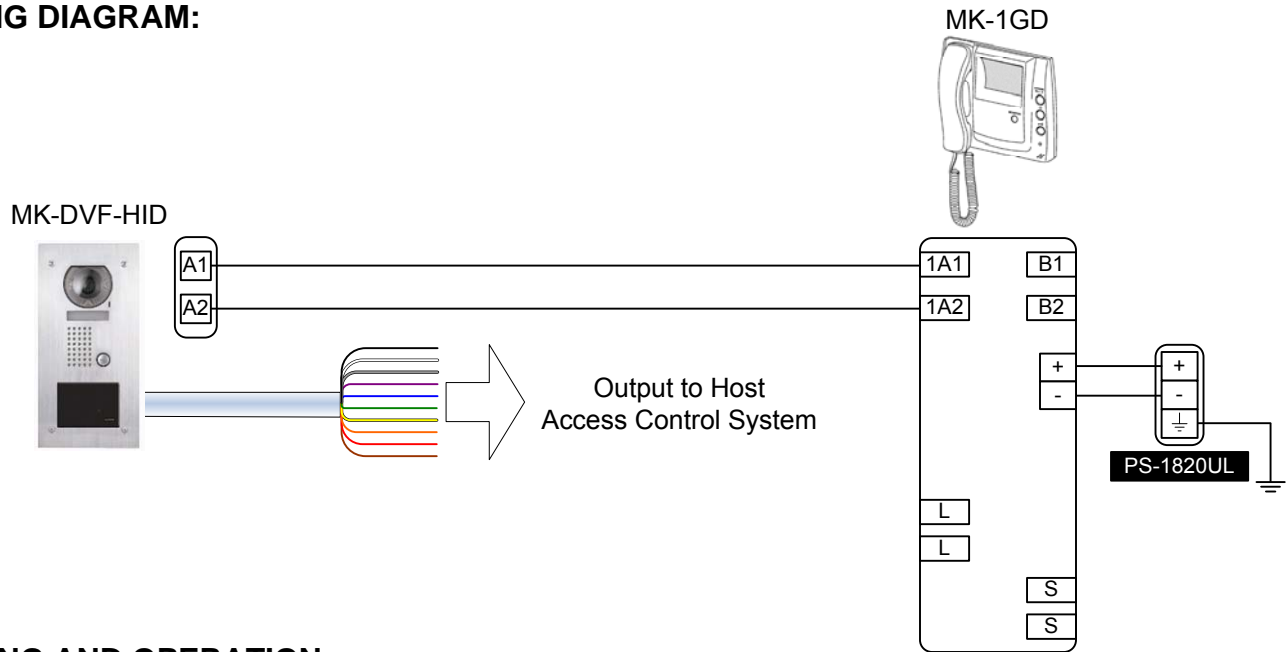

## TESTING AND OPERATION:

- When power is applied to the card reader, the LED will flash green three (3) times while the beeper beeps simultaneously. The LED will then turn red. This indicates that the microcontroller is operating properly.
- Present an ID card to the reader. (Hold card directly in front of reader.) The LED will momentarily turn green while the beeper beeps once, indicating that the card was read successfully.

## SPECIFICATIONS:

### CARD READER:

Power Source: 5 ~ 16V DC  
Absolute Max. Voltage: 18V DC  
Current Requirements: 30mA (Avg); 75mA (peak)  
Terminations: Color-coded pre-wired pigtail  
Wiring Distance: 500'  
Operating Temperature: -10°~60°C / 14°~140°F  
Operating Humidity: 0-95% relative humidity non-condensing

### CAMERA:

Camera unit: CCD Camera  
Scanning line: 525 lines  
Min. illumination: 1 Lux at 1'  
Terminations: Screw terminals  
Wiring Distance: 330' w/871802 wire  
980' w/MYW-BA & 851602 wire  
Dimensions(camera): 5-3/4" W x 11-5/8" H x 1-5/16" D  
With SBX-DVF-P: 5-15/16" W x 11-3/4" H x 2-13/16" D (Top)  
1-15/16" D (Bottom)

### FCC WARNING:

This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
  - (2) This device must accept any interference that may cause undesired operation.
- For proper regulatory compliance, the drain wire should be disconnected at the power supply end of the cable.
  - Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
  - The Reader is intended to be powered from a limited power source output of a previously certified power supply.

Aiphone Communication Systems  
1700 130th Ave. N.E.  
Bellevue, WA 98005  
(425) 455-0510  
FAX (425) 455-0071

**Toll Free Technical Support:**  
1-800-692-0200  
E-mail tech-serv@aiphone.com

Pg. 2  
MK-DVF-HID Instr.  
0706JDJS

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>