

**COLONY CORNER™ WHIRLPOOL AND BATHING POOL**

**1730.018 Whirlpool featuring System I**

- Acrylic with fiberglass reinforcement
- Molded-in seat
- Center drain outlet
- 1.25 HP single speed, self-draining pump/motor
- Factory installed power cord with plug
- Six multi-directional and flow-adjustable jets
- Deck-mounted air switch On/Off
- Two air volume controls
- Factory installed and tested whirlpool system

**1730.018C EverClean® Whirlpool Featuring System I:**

- Same as 1730.018 except with the EverClean System

**1730.002 Bathing Pool only**

**Nominal Dimensions:**

1524 x 1524 x 495mm  
(60" x 60" x 19-1/2")

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a patented silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS





**To Be Specified - Required:**

- Color:
- Bath Filler: (specify finish)
- Bath Drain: 1583.470 (specify finish)

**To Be Specified - Optional:**

- Corner Apron: 0730.121 (specify color)
- Jet Trim Ring Kit: 9860.200-two per kit (specify finish)
- Universal Tile Bead Kit: 751755-100

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

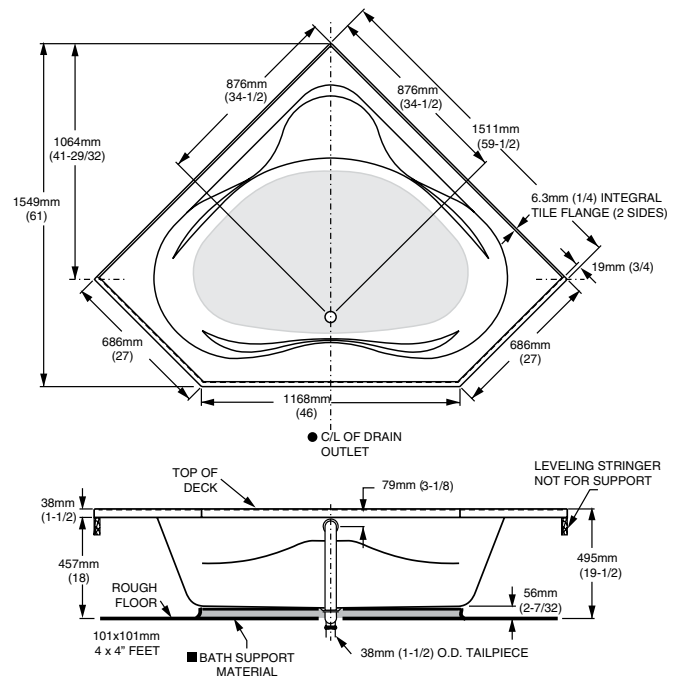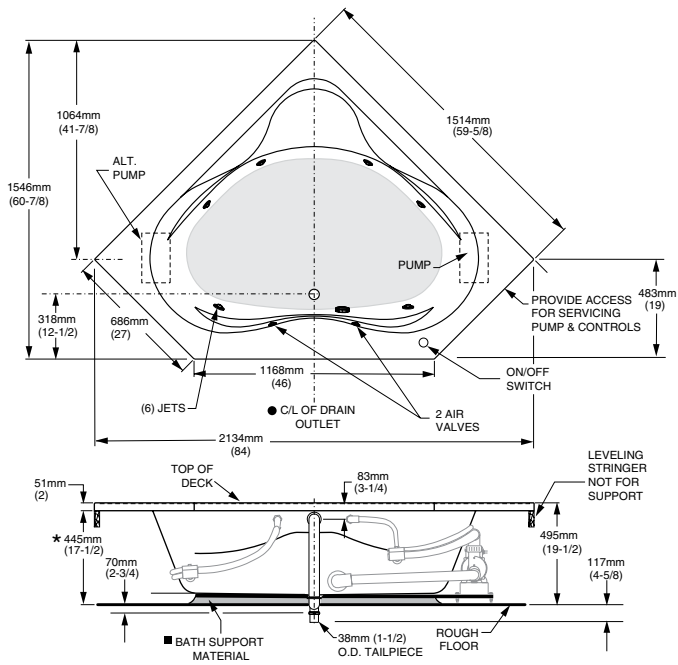

GENERAL SPECIFICATIONS FOR 1730 WHIRLPOOL	
INSTALLED SIZE	60 x 60 x 19-1/2 In. (1524 x 1524 x 495mm)
WEIGHT	115 Lbs. (52 Kg.)
WEIGHT w/WATER	908 Lbs. (412 Kg.)
GAL. TO OVERFLOW	95 Gal. (360 L.)
WHIRLPOOL MIN. OPERATING VOL.	65 Gal. (246 L.)
BATHING WELL AT SUMP	30 x 50 In. (762 x 1270mm)
BATHING WELL AT RIM	45-1/2 x 63-1/2 In. (1156 x 1613mm)
WATER DEPTH TO OVERFLOW	13 In. (330 mm)
FLOOR LOADING (PROJECTED AREA)	36 Lbs./Sq. Ft. (177 Kgs./Sq. m.)
PTS.	27.8
CUBE (FT <sup>3</sup> )	54
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
SYSTEM I PUMP	1.25 HP, 9.9 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 1730 BATHING POOL	
INSTALLED SIZE	60 x 60 x 19-1/2 In. (1524 x 1524 x 495mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	888 Lbs. (403 Kg.)
GAL. TO OVERFLOW	95 Gal. (360 L.)
BATHING WELL AT SUMP	30 x 50 In. (762 x 1270mm)
BATHING WELL AT RIM	45-1/2 X 31-1/2 In. (1156 x 1613mm)
WATER DEPTH TO OVERFLOW	13 In. (330mm)
FLOOR LOADING (PROJECTED AREA)	36 Lbs./Sq.Ft. (174 Kgs./Sq.m)
PTS.	27.8
CUBE (FT <sup>3</sup> )	54

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

CONCEALED PIPING NOT INCLUDED.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>