American Standard

Style That Works Better

PRINCETONTM RECESS BATH AMERICAST[®] BRAND ENGINEERED MATERIAL

PRINCETON™ RECESS BATH

Americast[®] brand engineered material

- 2391.202 Right Hand Outlet
- 2391.202TC Same as above w/tub cover
- 2390.202 Left Hand Outlet
- 2390.202TC Same as above w/tub cover
 - Acid resistant porcelain finish
 - Recess bath with integral apron and tiling flange
 - Integral lumbar support
 - Beveled headrest
 - Full slip-resistant coverage
 - End drain outlet

PRINCETON™ RECESS BATH for Above Floor Rough Installation

- **2392.202** Left Hand Outlet for above floor installation
- 2392.202TC Same as above w/tub cover
- **2393.202** Right Hand Outlet for above floor installation
- 2393.202TC Same as above w/tub cover

Nominal Dimensions:

1524 x 762 x 356mm (445mm for above floor installation) 60" x 30" x 14" (17-1/2" for above floor installation)

Bathing Well Dimensions:

1423 x 635 x 337mm (56" x 25" x 13-1/4")

Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.4 for Americast Plumbing Fixtures
- ASTM F-462 for Slip-resistant Bathing Facilities
- ANSI Z124.1 Ignition Test
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

Americast[®] brand engineered material is a composition of porcelain bonded to enameling grade metal, bonded to a patented structural composite.



SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS



To Be Specified - Required:

- Color:
 Bath Faucet*:
 Faucet Finish:
- Drain: 1583.470
- Drain Finish:


*See faucet section for additional models available

American Standard

Style That Works Better


PRINCETON™ RECESS BATH AMERICAST® BRAND ENGINEERED MATERIAL

NOTE: Dimensions shown for 2390/2391 only. Refer to installation instruction for 2392/2393 above floor installation.

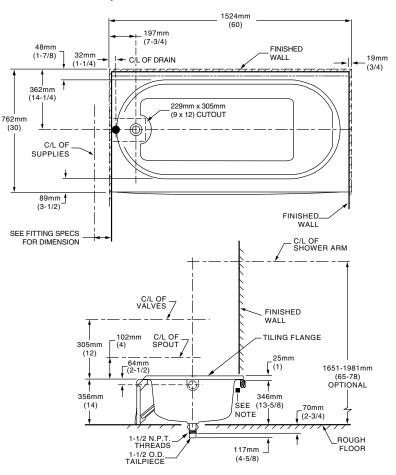

GENERAL SPECIFICATIONS FOR 2390/2391 BATHING POOL	
INSTALLED SIZE 60 x 30 x	14 In. (1524 x 762 x 356mm)
WEIGHT	110 Lbs. (50 Kg.)
WEIGHT w/WATER	460 Lbs. (209 Kg.)
GAL. TO OVERFLOW	42 Gal. (159 L)
BATHING WELL AT SUMP	_ 42 x 19 ln. (1067 x 483mm)
BATHING WELL AT RIM	_ 56 x 25 ln. (1423 x 635mm)
WATER DEPTH TO OVERFLOW	9-1/2 In. (241mm)
FLOOR LOADING3	7 Lbs./Sq.Ft. (175 Kgs./Sq.m)
(PROJECTED AREA)	
PTS	6.2
CUBE (FT ³)	

Below is shown typical cross sections of the tub rim showing typical wall constructions.



NOTES:

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS. (2391.202).

GENERAL SPECIFICATIONS FOR 2392/2393 BATHING POOL

. 60 x 30 x 17-1/2 In. (1524 x 762 x 445mm)

119 Lbs. (54 Kg.)

42 Gal. (159 L)

21.2

469 Lbs. (213 Ka.)

_ 9-1/2 ln. (241mm)

42 x 19 ln. (1067 x 483mm) 56 x 25 ln. (1423 x 635mm)

38 Lbs./Sq.Ft. (182 Kgs./Sq.m)

SHOWN WITH POP-UP C.D. & O.

PTS. _____ CUBE (FT³)

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH FITTING.

CONCEALED PIPING NOT FURNISHED.

INSTALLED SIZE

WEIGHT w/WATER

FLOOR LOADING

(PROJECTED AREA)

GAL. TO OVERFLOW

BATHING WELL AT SUMP

BATHING WELL AT RIM _____ WATER DEPTH TO OVERFLOW

WEIGHT

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.4 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

H112

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com