

PRISON LAVATORY

PRISON LAVATORY

- Vitreous china
- · Integral spout and drinking nozzle
- Soap depression
- Outlet connection to slip 1-1/4" O.D. tubing
- ☐ 0421.018 China only with integral drain
- ☐ 0431.066 China only w/non-removable stopper

Available Components:

- □ 002250.090 Self-closing hot and cold fitting for 0" to 4" (0 to 102mm) wall
- □ 002250.108 Self-closing hot and cold fitting for 4" to 9" (102 to 229mm) wall
- □ 002423.010 Drain with non-removable stopper

Nominal Dimensions:

Available in White Only

356 x 324mm (14" x 12-3/4")

Compliance Certifications - Meets or Exceeds the Following Specifications:

• ASME A112.19.2 for Vitreous China Fixtures

To Be Specified: 1-1/4" Trap:	
·	



SEE REVERSE FOR ROUGHING-IN DIMENSIONS




PRISON LAVATORY VITREOUS CHINA

0431.066/0421.018

0" to 4" WALL THICKNESS

0431.066/0421.018 4" to 9" WALL THICKNESS

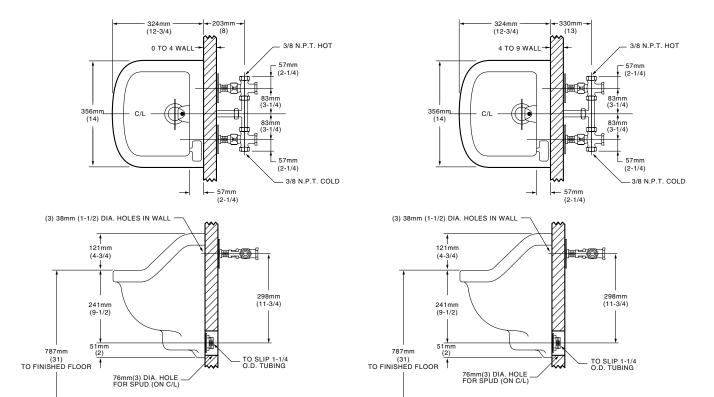

NOTES:
THESE LAVATORIES DO NOT HAVE A TRAP. PROVISIONS MUST BE MADE FOR INSTALLATION OF TRAP IN WALL.
0431.SERIES SHOWN. 0421.SERIES SAME EXCEPT WITH INTEGRAL SLOW-DRAINING OUTLET.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com